

**Ontario Geological Survey
Aggregate Resources Inventory
Paper 119**

**Aggregate Resources Inventory of
Keppel and Sarawak Townships
Grey County
Southern Ontario**

**By Staff of the Engineering and Terrain Geology
Section, Ontario Geological Survey**

1985



**Ministry of
Natural
Resources**

**Hon. Michael Harris
Minister**

**Mary Mogford
Deputy Minister**

©1985 Government of Ontario
Printed in Ontario, Canada

ISSN 0708-2061
ISBN 0-7743-9047-6

Publications of the Ontario Ministry of Natural Resources are available from the following sources. Orders for publications should be accompanied by cheque or money order payable to the *Treasurer of Ontario*.

Reports, maps, and price lists (personal shopping or mail order):

**Public Service Centre, Ministry of Natural Resources
Room 1640, Whitney Block, Queen's Park
Toronto, Ontario M7A 1W3**

Reports and accompanying maps only (personal shopping):

**Main Floor, 880 Bay Street
Toronto, Ontario**

Reports and accompanying maps (mail order or telephone orders):

**Publications Services Section, Ministry of Government Services
5th Floor, 880 Bay Street
Toronto, Ontario M7A 1N8
Telephone (local calls) 965-6015
Toll-free long distance 1-800-268-7540
Toll-free from Area Code 807 0- ZENITH-67200**

This report was prepared by: Staff of the Aggregate Assessment Office, Engineering and Terrain Geology Section of the Ontario Geological Survey, Ontario Ministry of Natural Resources, 77 Grenville Street, Toronto M5S 1B3, Telephone (416) 965-1182.

Project Supervisor: Dale W. Scott

Field Work and Report by: I. Szoke

Compilation and Drafting by: Staff of the Aggregate Assessment Office

The Mineral Resources Staff of Owen Sound District and Southwestern Region of the Ministry of Natural Resources assisted in the collection of data, field checking and review of this report.

Every possible effort is made to ensure the accuracy of the information contained in this report, but the Ministry of Natural Resources does not assume any liability for errors that may occur. Source references are included in the report and users may wish to verify critical information.

Parts of this publication may be quoted if credit is given. It is recommended that reference to this report be made in the following form:

Ontario Geological Survey

1985: Aggregate Resources Inventory of Keppel and Sarawak Townships, Grey County; Ontario Geological Survey, Aggregate Resources Inventory Paper 119, 39p., 7 tables, 3 maps, scale 1:50 000.

500-85

Contents

Abstract	2
Introduction	3
Part I - Inventory Methods	4
Field and Office Methods	4
Resource Tonnage Calculation Techniques	4
Sand and Gravel Resources	4
Bedrock Resources	4
Units and Definitions	5
Part II - Data Presentation and Interpretation	6
Map 1 Distribution of Sand and Gravel Deposits	6
Deposit Symbol	6
Texture Symbol	6
Map 2 Selected Sand and Gravel Resource Areas	6
Site Specific Criteria	7
Deposit Size	7
Aggregate Quality	7
Location and Setting	7
Regional Considerations	8
Map 3 Bedrock Resources	8
Selection Criteria	8
Selected Resource Areas	9
Part III - Assessment of Aggregate Resources in Keppel and Sarawak Townships	10
Location and Population	10
Physiography and Surficial Geology	10
Extractive Activity	11
Selected Sand and Gravel Resource Areas	11
Selected Sand and Gravel Resource Area 1	11
Selected Sand and Gravel Resource Area 2	12
Sand and Gravel Resource Areas of Secondary Significance	12
Bedrock Geology	13
Selected Bedrock Resource Areas 1a to 1i and 2a to 2i	14
Summary	15
References	31
Appendix A - Suggested Additional Reading	32
Appendix B - Glossary	33
Appendix C - Geology of Sand and Gravel Deposits	35
Appendix D - Geology of Bedrock Deposits	37

TABLES

1. Total Sand and Gravel Resources, Keppel and Sarawak Townships	16
2. Sand and Gravel Pits, Keppel and Sarawak Townships	17
3. Selected Sand and Gravel Resource Areas, Keppel and Sarawak Townships	18
4. Total Identified Bedrock Resources, Keppel and Sarawak Townships	19
5. Quarries, Keppel and Sarawak Townships	21
6. Selected Bedrock Resource Areas, Keppel and Sarawak Townships	22
7. Summary of Test Hole Data, Keppel and Sarawak Townships	24

FIGURES

1. Key Map Showing the Location of Keppel and Sarawak Townships	2
2a. Aggregate Grading Curves, Keppel and Sarawak Townships	25
2b. Aggregate Grading Curves, Keppel and Sarawak Townships	26
3a. Aggregate Grading Curves, Keppel and Sarawak Townships	27
3b. Aggregate Grading Curves, Keppel and Sarawak Townships	28
4a. Aggregate Grading Curves, Keppel and Sarawak Townships	29
4b. Aggregate Grading Curves, Keppel and Sarawak Townships	30
5. Bedrock Geology of Southern Ontario	37

MAPS (back pocket)

1. Distribution of Sand and Gravel Deposits, Keppel and Sarawak Townships, Scale 1:50 000.
2. Selected Sand and Gravel Resource Areas, Keppel and Sarawak Townships, Scale 1:50 000.
3. Bedrock Resources, Keppel and Sarawak Townships, Scale 1:50 000.

Aggregate Resources Inventory of Keppel and Sarawak Townships Grey County

**by
Staff' of the Engineering and Terrain Geology Section**

1. Project supervisor: Dale W. Scott; field work and report by I. Szoke; compilation and drafting by staff of the Aggregate Assessment Office. The Mineral Resources Staff of Owen Sound District and Southwestern Region of the Ministry of Natural Resources assisted in the collection of data, field checking and review of this report.

Manuscript accepted for publication by Chief, Engineering and Terrain Geology Section, January 23, 1985. This report is published with the permission of V.G. Milne, Director, Ontario Geological Survey.

Abstract

This report includes both an inventory and evaluation of sand and gravel, as well as bedrock resources, in Keppel and Sarawak Townships. The report is part of the Aggregate Resources Inventory Program for townships and municipalities designated under the Pits and Quarries Control Act.

Surficial deposits in Keppel and Sarawak Townships include ice-contact stratified drift, lacustrine beach and lacustrine plain deposits. The aggregate in these deposits is of variable quality generally restricting their use to sources of low-specification aggregate. The reserves which still remain are limited and are likely to come from resource areas selected at the primary or secondary level of significance. One ice-contact stratified drift deposit located in Keppel Township and a large beach deposit in Sarawak Township have been selected as resource areas of primary significance. Additional smaller deposits have been included at the secondary level of significance in view of the general shortage of sand and gravel deposits in these townships.

The Primary Resource Areas have a combined unlicensed area of 560 acres (227 ha). An estimated 165 acres (67 ha) are currently available for extraction and contain possible resources of 8 million tons (7 million tonnes).

The possible resources of available sand and gravel will be insufficient for local needs in the future, and will require augmentation from other sources. Care should be taken to ensure the proper utilization of the remaining resources.

There are several bedrock formations of Upper Ordovician and Lower and Middle Silurian age which underlie the townships. Possible aggregate resources derived from bedrock are available from the Amabel Formation. Dolostone from the Amabel Formation is suitable for the production of crushed stone and other industrial mineral products. Presently, there are two licensed quarries in Keppel Township. The Eramosa Member of the Amabel Formation is mined at these locations for the production of dimension stone and other ornamental rock products. Possible resources in the Selected Bedrock Resource Areas are approximately 10,400 million tons (9400 million tonnes). These figures represent stone resources of regional significance.

Selected Resource Areas are not intended to be permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such Resource Areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

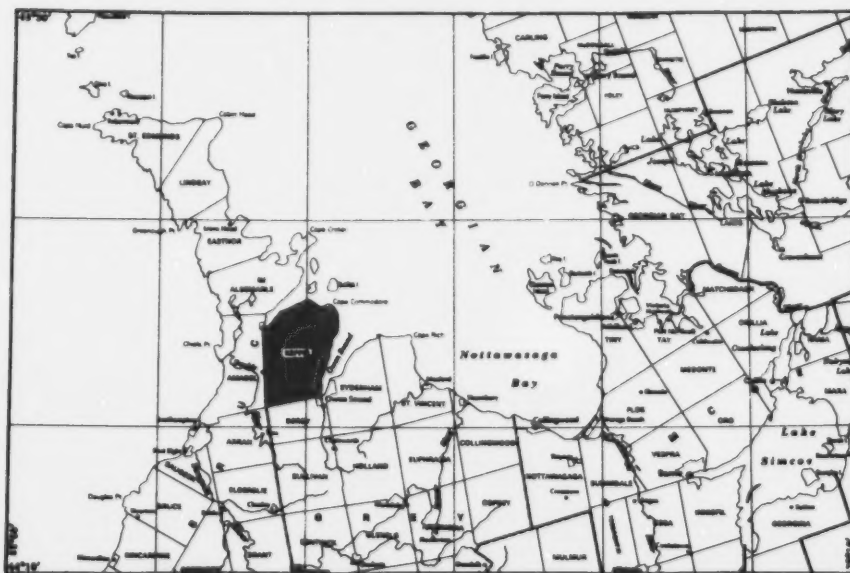


Figure 1. Key Map Showing the Location of Keppel and Sarawak Townships, Scale 1:1 800 000.

Introduction

Mineral aggregates, which include bedrock-derived crushed stone as well as naturally formed sand and gravel, constitute the major raw material in Ontario's road-building and construction industries. Very large amounts of these materials are used each year throughout the Province. For example, in 1982, the total tonnage of mineral aggregates extracted was 101 million tons (92 million tonnes), greater than that of any other metallic or nonmetallic commodity mined in the Province (Ontario Ministry of Natural Resources 1983).

Although mineral aggregate deposits are plentiful in Ontario, they are fixed-location, nonrenewable resources which can be exploited only in those areas where they occur. Mineral aggregates are characterized by their high bulk and low unit value so that the economic value of a deposit is a function of its proximity to a market area as well as its quality and size. The potential for extractive development is usually greatest in urban fringe areas where land use competition is extreme. For these reasons the availability of adequate resources for future development is now being threatened in some areas.

Comprehensive planning and resource management strategies are required to make the best use of

available resources, especially in those areas experiencing rapid development. Such strategies must be based on a sound knowledge of the total mineral aggregate resource base at both local and regional levels. The purpose of the Aggregate Resources Inventory is to provide the basic geological information required to include potential mineral aggregate resource areas in planning strategies and official plans. The reports should form the basis for discussion on those areas best suited for possible extraction. The aim is to assist decision-makers in protecting the public well-being by ensuring that adequate resources of mineral aggregate remain available for future use.

This report is a technical background document, based for the most part on geological information and interpretation. It has been designed as a component of the total planning process and should be used in conjunction with other planning considerations, to ensure the best use of a municipality's resources.

The report includes an assessment of sand and gravel resources as well as a discussion on the potential of bedrock-derived aggregate. The most recent information available has been used to prepare the report. As new information becomes available, revisions may be necessary.

Part I — Inventory Methods

FIELD AND OFFICE METHODS

The methods used to prepare the report primarily involve the interpretation of published geological data such as bedrock and surficial geology maps and reports (see References) as well as field examination of potential resource areas. Field methods include the examination of natural and man-made exposures of granular material. Most observations are made at quarries and sand and gravel pits located from records held by the Ontario Ministry of Transportation and Communications, the Ontario Geological Survey, and by Regional and District Offices of the Ontario Ministry of Natural Resources. Observations made at pit sites include estimates of the total face height and the proportion of gravel- and sand-sized fragments in the deposit. Observations are also made of the shape and lithology of the particles. These characteristics are important in estimating the quality and quantity of the aggregate. In areas of limited exposure, test pitting, soil probing, hand augering and geophysical techniques are used to assess subsurface materials. Air-photos at various scales are used to determine the continuity of deposits, especially in areas where information is limited.

Deposits with potential for further extractive development or those where existing data are scarce, are studied in greater detail. Representative layers in these deposits are sampled in 25- to 100- pound (11 to 45 kg) units from existing pit faces or from test pits. The samples are analysed for grain size distribution and in some cases Los Angeles abrasion, absorption, and Magnesium Sulphate soundness tests along with petrographic analyses are performed.

Analyses are performed either in the laboratories of the Soils and Aggregates Section, Engineering Materials Office, Ontario Ministry of Transportation and Communications, or in the Geoscience Laboratories, Geoservices Section, Ontario Geological Survey. In areas of limited subsurface exposure, test holes are drilled and geophysical surveys using hammer seismic equipment are undertaken. The symbols for and locations of sample and test hole sites along with geophysical traverse lines are noted on Map 1.

In the office, the field data are supplemented by pit information on file with the Soils and Aggregates Section of the Ontario Ministry of Transportation and Communications. Data contained in these files include field estimates of the depth, composition and "workability" of deposits as well as laboratory analyses of the physical properties and chemical suitability of the aggregate. Information concerning the development history of the pits and acceptable uses of the aggregate is also recorded. The location, size, and depth of extraction of pits licenced under the Pits and Quarries Control Act are obtained from records held by Regional and District Offices of the Ontario Ministry of Natural Resources. The cooperation of the above-named groups in the compilation of inventory data is gratefully acknowledged.

Water well records, held by the Ontario Ministry of the Environment, are used in some areas to corroborate thickness estimates or to indicate the presence of buried granular material. These records are used in conjunction with other evidence. Topographic maps of the National Topographic System, at a scale

of 1:50 000, were used as a compilation base for the field and office data. The information was then transferred to a base map, also at a scale of 1:50 000, prepared by the Cartography Section of the Lands and Waters Group, Ontario Ministry of Natural Resources, for presentation in the report.

RESOURCE TONNAGE CALCULATION TECHNIQUES

SAND AND GRAVEL RESOURCES

Once the interpretative boundaries of the aggregate units have been drawn, quantitative estimates of the possible resources available can be made. Generally, the volume of a deposit can be calculated if its areal extent and average thickness are known or can be estimated. The computation methods used are as follows. First, the area of the deposit, as outlined on the final base map, is calculated in acres. The thickness values used are an approximation of the deposit thickness, based on the face heights of pits developed in the deposit or on subsurface data such as test holes and water well logs. Original tonnage values can then be calculated by multiplying the volume of the deposit by 2500 (the density factor). This factor is approximately the number of tons in a one-foot (0.3 m) thick layer of sand and gravel, one acre (0.4 ha) extent, assuming an average density of 110 pounds per cubic foot (1766 kg per cubic metre).

$$\text{Tonnage} = \text{Area} \times \text{Thickness} \times \text{Density Factor}$$

Tonnage calculated in this manner must be considered only as an estimate. Furthermore, such tonnages represent amounts that existed prior to any extraction of material (i.e. original tonnage) (Table 1, Column 4).

The Selected Sand and Gravel Resource Areas in Table 3 are calculated in the following way. Two successive subtractions are made from the total area. Column 3 accounts for the number of acres unavailable because of the presence of permanent cultural features and their associated setback requirements. Column 4 accounts for those areas that have previously been extracted (e.g. wayside and abandoned pits are included in this category). The remaining figure is the area of the deposit currently available for extraction (Column 5). The available area is then multiplied by the estimated deposit thickness and the density factor (Column 5 x Column 6 x 2500) to give an estimate of the sand and gravel tonnage (Column 7) presently available for extractive development and/or resource protection.

Reserve estimates are calculated for deposits of primary significance. Reserve estimates for deposits of secondary and tertiary significance are not calculated in Table 3, however the aggregate potential of these deposits is discussed in the report.

BEDROCK RESOURCES

The method used to calculate resources of bedrock-derived aggregate is much the same as that described above. The areal extent of bedrock formations overlain by less than 50 feet (15 m) of unconsolidated overburden is determined from bedrock geology maps, drift thickness and bedrock topography maps, and from the interpretation of water well records. The

measured extent of such areas is then multiplied by the estimated quarriable thickness of the formation, based on stratigraphic analyses and on estimates of existing quarry faces in the unit. In some cases a standardized estimate of 60 feet (18 m) is used for thickness. Volume estimates are then multiplied by the density factor (the estimated weight in tons of a one-foot (0.3 m) thick section of rock, one acre (0.4 ha) in extent).

Resources of dolostone are calculated using a density factor of 165 pounds per cubic foot (2649 kg per cubic metre) or 3600 tons per acre (8070 tonnes per hectare). Sandstone resources are calculated using a density estimate of 146 pounds per cubic foot (2344 kg per cubic metre) and shale resources are calculated with a factor of 150 pounds per cubic foot (2408 kg per cubic metre).

UNITS AND DEFINITIONS

Although most of the measurements and other primary data available for resource tonnage calculations are given in Imperial units, Metric units have also been given in the text and on the tables which accompany the report. The Metric equivalent of the data is shown in brackets after or directly below the corresponding Imperial figures. Data are generally rounded off in accordance with the Ontario Metric Practice Guide (Metric Committee 1975).

The tonnage estimates made for sand and gravel deposits are termed possible resources in accordance with terminology of the Ontario Resource Classification Scheme (Robertson 1975, p.7) and with the Association of Professional Engineers of Ontario (1976) (see Glossary, Appendix B).

Part II — Data Presentation and Interpretation

Three maps, each portraying a different aspect of the aggregate resources in the municipality, accompany the report. Map 1, "Distribution of Sand and Gravel Deposits", gives a comprehensive inventory of the sand and gravel resources in the report area. Map 2, "Selected Sand and Gravel Resource Areas", shows those deposits which are considered to represent the largest and/or highest quality resources in the area. Map 3, "Bedrock Resources" shows the distribution of bedrock formations, the thickness of overlying unconsolidated sediments, and identifies the Selected Bedrock Resource Areas.

MAP 1: DISTRIBUTION OF SAND AND GRAVEL DEPOSITS

Map 1 is derived from existing surficial geology maps of the area or from airphoto interpretation in areas where surficial mapping is incomplete. The map shows the extent and quality of sand and gravel deposits within the study area and the present level of extractive activity.

On the map, gravel deposits are indicated by dark brown shading while sand deposits are shaded light brown. The present level of extractive activity is also indicated. Those areas which are licenced for extraction under the Pits and Quarries Control Act are shown by a solid outline and identified by a number which refers to the pit descriptions in Table 2. Each description notes the owner, location and licenced acreage of the pit, as well as the estimated face height and percentage gravel. A number of unlicenced pits (abandoned pits or wayside pits operating on demand under authority of a permit) are identified by a numbered dot on Map 1 and described in Table 2.

Map 1 also presents a summary of available information related to the quality of aggregate contained in all the known aggregate deposits in the study area. Much of this information is contained in the symbols which are found on the map. The Deposit Symbol appears for each mapped deposit and summarizes important genetic and textural data. The Texture Symbol is a circular proportional diagram which displays the grain size distribution of the aggregate in areas where bulk samples were taken.

DEPOSIT SYMBOL

The Deposit Symbol is similar to those used in soil mapping and land classification systems commonly in use in North America. The components of the symbol indicate the gravel content, thickness of material, origin (type), and quality limitations for every deposit shown on Map 1. These components are illustrated by the following example:

Gravel Content	Geological Type
G 2	OW C
Thickness Class	Quality

This symbol identifies an outwash deposit 10 to 20 feet (3 to 6 m) thick containing more than 35 percent gravel. Excess silt and clay may limit uses of the aggregate in the deposit.

The "gravel content" and "thickness class" are basic criteria for distinguishing different deposits. The "gravel content" symbol is an upper case "S" or "G". The "S" indicates that the deposit is generally "sandy" and that gravel-sized aggregate (greater than 4.75 mm) makes up less than 35 percent of the whole deposit. "G" indicates that the deposit contains more than 35 percent gravel.

The "thickness class" indicates a depth range which is related to the potential resource tonnage for each deposit. Four thickness class divisions have been established as shown in the legend for Map 1.

Two smaller sets of letters, divided from each other by a horizontal line, follow the thickness class number. The upper series of letters identifies the geologic deposit type (the types are summarized with respect to their main geologic and extractive characteristics in Appendix C) and the lower series of letters identifies the main quality limitations that may be present in the deposit as discussed in the next section.

TEXTURE SYMBOL

The Texture Symbol provides a more detailed assessment of the grain size distribution in deposits where samples were taken for analysis during field study. The information from which these symbols are derived has been plotted in grain size distribution graphs. The relative amounts of gravel, sand, and silt and clay in the sampled material are shown graphically by the subdivision of a circle into proportional segments. The following example shows a hypothetical sample consisting of 30 percent gravel, 60 percent sand, and 10 percent silt and clay:



Test hole locations are shown on Map 1 by a solid drill hole symbol. Geophysics lines are shown on the map by a line symbol.

MAP 2: SELECTED SAND AND GRAVEL RESOURCE AREAS

Map 2 is an interpretative map derived from an evaluation of the deposits shown on Map 1. The deposits identified on Map 2 are those which are considered to be important in ensuring an adequate resource base for the future.

All the selected sand and gravel resource areas are first delineated by geological boundaries and then classified into three levels of significance: primary; secondary; and tertiary. Each area of primary significance is assessed as to its probable relative value as a resource in the municipality and is given a deposit number which denotes its ranking order. All such deposits are shown by dark shading on Map 2.

Deposits of secondary significance are not ranked numerically in this report, but are indicated by light red shading on Map 2. Such deposits are believed to contain significant amounts of sand and gravel. Al-

though deposits of secondary significance are not considered to be the "best" resources in the report area, they may contain large quantities of sand and gravel and should be considered as part of the aggregate supply of the area.

Areas of tertiary significance are outlined on the map by a solid line but have no shading. They are not considered to be important resource areas because of their low available resources, or because of possible difficulties in extraction. Such areas may be useful for local needs but are unlikely to support large-scale development.

Selected Sand and Gravel Resource Areas of primary significance are not permanent, single, land use units which must be incorporated in an official planning document. They represent areas in which a major resource is known to exist. Such Resource Areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

The process by which deposits are evaluated and selected involves the consideration of two sets of criteria. The main selection criteria are site specific, related to the characteristics of individual deposits. Factors such as deposit size, aggregate quality, and deposit location and setting are considered in the selection of those deposits best suited for extractive development. A second set of criteria involves the assessment of local aggregate resources in relation to the quality, quantity, and distribution of resources in the region in which the report area is located. The intent of such a process of evaluation is to ensure the continuing availability of sufficient resources to meet possible future demands.

SITE SPECIFIC CRITERIA

Deposit Size

Ideally, selected deposits should contain available sand and gravel resources large enough to support a commercial pit operation using a stationary or portable processing plant. In practice, much smaller deposits may be of significant value depending on the overall reserves in the rest of the municipality. Generally, deposits in Class 1, i.e. those thicker than 20 feet (6 m), and containing more than 35 percent gravel are considered to be most favourable for commercial development. Thinner deposits may be valuable in municipalities with low total resources.

Aggregate Quality

The limitations of natural aggregates for various uses result from variations in the lithology of the particles composing the deposit, and from variations in the size distribution of these particles.

Four indicators of the quality of aggregate may be included in the symbol for each deposit on Map 1. They are: gravel content (G or S); fines (C); oversize (O); and lithology (L).

Three of the indicators deal with grain size distribution. The gravel content (G or S) indicates the suitability of aggregate for various uses. Deposits containing at least 35 percent gravel in addition to a minimum of 20 percent material greater than the 26.5 mm sieve are considered to be the most favourable

extractive sites, since this content is the minimum from which crushed products can be economically produced.

Excess fines (high silt and clay content) may severely limit the potential use of a deposit. Fines content in excess of 10 percent may impede drainage in road sub-base aggregate and render it more susceptible to the effects of frost action. In asphalt aggregate, excess fines hinder the bonding of particles. Deposits known to have a high fines content are indicated by a "C" in the quality portion of the Deposit Symbol.

Deposits containing more than 20 percent oversize material (greater than 4 inches (10 cm) in diameter) may also have use limitations. The oversize component is unacceptable for all concrete aggregate and for road-building aggregate, so it must be either crushed or removed during processing. Deposits known to have an appreciable oversize component are indicated by an "O" in the quality portion of the Deposit Symbol.

The other indicator of the quality of an aggregate is lithology. Just as the unique physical and chemical properties of bedrock types determine their value for use as crushed rock, so do various lithologies of particles in a sand and gravel deposit determine its suitability for various uses. The presence of objectionable lithologies such as chert, siltstone, and shale, even in relatively small amounts, can result in a reduction in the quality of an aggregate, especially for high quality uses such as concrete and asphalt. Similarly, highly weathered, very porous and friable rock can restrict the quality of an aggregate. Deposits known to contain objectionable lithologies are indicated by an "L" in the quality component of the Deposit Symbol.

If the Deposit Symbol indicates either "C", "O", or "L" or any combination, the quality of the deposit is considered to be reduced for some uses of the aggregate. No attempt has been made to quantify the degree of limitation imposed. Assessment of the four indicators is made from published data, from data contained in files of both the Ontario Ministry of Transportation and Communications and the Engineering and Terrain Geology Section of the Ontario Geological Survey, and from field observations.

Analyses of unprocessed samples obtained from test holes, pits or sample sites have been plotted on grain size distribution graphs. On the graphs are the gradation specification envelopes for Ontario Ministry of Transportation and Communications' products: Granular Base Course A, B and C; Hot-Laid Asphaltic Sand Nos. 1,2,3,4, and 8; and concrete sand. By plotting the gradation curves with respect to the specification envelopes, it can be determined how well the unprocessed sampled material meets the criteria for each product.

Location and Setting

The location and setting of a resource area has a direct influence on its value for possible extraction. The evaluation of a deposit's setting is made on the basis of natural and man-made features which may limit or prohibit extractive development.

First, the physical context of the deposit is considered. Deposits with some physical constraint on ex-

tractive development, such as thick overburden or high water table, are less valuable resource areas because of the difficulties involved in resource recovery. Second, permanent man-made features, such as roads, railways, powerlines, and housing developments, which are built on a deposit, may prohibit its extraction. The constraining effect of legally required setbacks surrounding such features is included in the evaluation. A quantitative assessment of these constraints can be made by measurement of their areal extent directly from the topographic maps. The area rendered unavailable by these features is shown for each resource area in Table 3 (Column 3).

The assessment of sand and gravel deposits with respect to local land use and to private land ownership is an important component of the general evaluation process. These aspects of the evaluation process are not considered further in this report, but readers are encouraged to discuss them with personnel of the pertinent District Office of the Ontario Ministry of Natural Resources.

REGIONAL CONSIDERATIONS

In selecting sufficient areas for resource development, it is important to assess both the local and the regional resource base, and to forecast future production and demand patterns.

Some appreciation of future aggregate requirements in an area may be gained by assessing its present production levels and by forecasting future production trends. Such an approach is based on the assumptions that production levels in an area closely reflect the demand and that the present production "market share" of an area will remain roughly at the same level.

The aggregate resources in the region surrounding a municipality should be assessed in order to properly evaluate specific resource areas and to adopt optimum resource management plans. For example, a municipality that has large resources in comparison to its surrounding region constitutes a regionally significant resource area. Municipalities with high resources in proximity to large demand centres, such as metropolitan areas, are special cases.

Although an appreciation of the regional context is required to develop comprehensive resource management techniques, such detailed evaluation is beyond the scope of this report. The selection of resource areas made in this study is based primarily on geological data or on considerations outlined in preceding sections.

MAP 3: BEDROCK RESOURCES

Map 3 is an interpretative map derived from bedrock geology, drift thickness and bedrock topography maps, water well data from the Ontario Ministry of the Environment, oil and gas well data from the Petroleum Resources Section (Ontario Ministry of Natural Resources) and from geotechnical test hole data from various sources. Map 3 is based on concepts similar to those outlined for Maps 1 and 2, but displays both the inventory and evaluation on the one map.

The geological boundaries of the bedrock units are shown by a dashed line. Isolated outcrops are

indicated by an "X". Three sets of contour lines delineate areas of less than 3 feet (1 m) of drift, areas of 3 to 25 feet (1 to 8 m) of drift, and areas of 25 to 50 feet (8 to 15 m) of drift. The extent of these areas of thin drift are shown by three shades of blue. The darkest shade indicates where bedrock outcrops or is within 3 feet (1 m) of the ground surface. These areas constitute potential resource areas because of their easy access. The medium shade indicates areas where drift cover is up to 25 feet (8 m) thick. Quarrying is possible in this depth of overburden and these zones also represent potential resource areas. The lightest shade indicates bedrock areas overlain by 25 to 50 feet (8 to 15 m) of overburden. These latter areas constitute resources which have extractive value only in specific circumstances. Outside of these delineated areas, the bedrock can be assumed to be covered by more than 50 feet (15 m) of overburden, a depth generally considered to be too great to allow economic extraction (unless part of the overburden is composed of economically attractive deposits).

Other inventory information presented on Map 3 is designed to give an indication of the present level of extractive activity in the report area. Those areas which are licenced for extraction under the Pits and Quarries Control Act are shown by a solid outline and identified by a number which refers to the quarry descriptions in Table 5. Each description notes the owner, location, licenced acreage and an estimate of face height. Unlicenced quarries (abandoned quarries or wayside quarries operating on demand under authority of a permit) are also identified and numbered on Map 3 and described in Table 5. One additional symbol appears on the map: an open dot indicates the location of a selected drill hole which penetrates bedrock. The overburden thickness is shown in feet beside the open dot.

SELECTION CRITERIA

Criteria equivalent to those used for sand and gravel deposits are used to select bedrock areas most favourable for extractive development.

The evaluation of bedrock resources is made primarily on the basis of performance and suitability data established by laboratory testing at the Ontario Ministry of Transportation and Communications. The main characteristics and uses of the bedrock units found in southern Ontario are summarized in Appendix D.

Deposit "size" is related directly to the areal extent of thin drift cover overlying favourable bedrock formations. Since vertical and lateral variations in bedrock units are much more gradual than in sand and gravel deposits, the quality and quantity of the resource are usually consistent over large areas.

Quality of the aggregate derived from specific bedrock units is established by the performance standards previously mentioned. Location and setting criteria and regional considerations are identical to those for sand and gravel deposits.

SELECTED RESOURCE AREAS

Selection of Bedrock Resource Areas has been restricted to a single level of significance. Three factors support this approach. First, quality and quantity variations are gradual. Second, the areal extent of a given quarry operation is much smaller than that of a sand and gravel pit producing an equivalent tonnage of material, and third, since crushed bedrock has a higher unit value than sand and gravel, longer haul distances can be considered. These factors allow the identification of alternative sites having similar development potential. The Selected Areas, if present, are shown on Map 3 by a line pattern and the calculated available tonnages are given in Table 6.

Selected Bedrock Resource Areas shown on Map 3 are not permanent, single land use units which must be incorporated in an official planning document. They represent areas in which a major bedrock resource is known to exist. Such Resource Areas may be reserved wholly or partially for extractive development and/or resource protection within the context of the official plan.

Part III — Assessment of Aggregate Resources in Keppel and Sarawak Townships

LOCATION AND POPULATION

Keppel and Sarawak Townships occupy a total combined area of 107,057 acres (43 326 ha) on the Bruce Peninsula in Grey County, southern Ontario. The townships are shown on the Cape Croker (41 A/14), North Keppel (41 A/15), Wiarton (41 A/11) and Owen Sound (41 A/10) map sheets of the National Topographic System, at a scale of 1:50 000. The surrounding municipalities are Amabel and Derby Townships, the Town of Wiarton and the City of Owen Sound.

In 1972, the populations of Keppel and Sarawak Townships were 2265 and 1724 respectively (Ontario Ministry of Treasury, Economics and Intergovernmental Affairs 1974). A decade later, in 1982, the population of Keppel Township was 2819 and the population of Sarawak Township was 2329, representing a 24 percent and 35 percent population growth respectively (Ontario Ministry of Municipal Affairs and Housing 1983). A further slight increase in population growth is forecast for all Grey County townships to the year 2001 (Ontario Ministry of Treasury Economics and Intergovernmental Affairs 1976).

Centres with potential industrial, trade and retail opportunities include the neighbouring City of Owen Sound, the Town of Wiarton and the Villages of Shallow Lake and Hepworth. There are numerous other small unincorporated hamlets and settlements located near major road intersections and along the Georgian Bay shoreline. Keppel and Sarawak Townships are mostly rural in character with steadily growing rural residential and recreational developments. Recreational developments are more pronounced along the Georgian Bay shoreline. The positive trend in population growth and the associated residential and recreational developments indicate an increasing need for high quality road-building and construction aggregate.

Road access in the townships is provided by King's Highway 6 and 70 as well as by a network of both paved and gravel-surfaced municipal roads. Freight service is provided by a line of the Canadian National Railways which traverses both townships between Owen Sound and Wiarton. Shipping facilities are available at the harbours of Owen Sound and Wiarton.

PHYSIOGRAPHY AND SURFICIAL GEOLOGY

Approximately 23 000 years ago, during the Late Wisconsin Substage of the Pleistocene Epoch (informally known as the "Great Ice Age"), lobes or submasses of the Laurentide continental ice sheet advanced out of the basins of the Great Lakes and joined together to cover southern Ontario. The lateral extent of the ice lobes and the positions of their margins underwent numerous fluctuations until approximately 10 000 years ago when the ice melted back and completely disappeared. The physiography and distribution of surficial materials in Keppel and Sarawak Townships, specifically the sand and gravel deposits shown on Map 1 of this report, are the result of the activities of the Georgian Bay ice lobe which

covered these townships during the Late Wisconsin Substage.

The landscape and land use activities of Keppel and Sarawak Townships have been described by Chapman and Putnam (1966). The reader is specifically referred to descriptions of the Bruce Peninsula (pp. 267-270), Arran Drumlin Field (pp. 227-231), and the Niagara Escarpment (pp. 173-188). More detailed mapping of the surficial deposits and a study of the glacial history of the area have been undertaken by the Ontario Geological Survey (Feenstra, in prep.; Sharpe 1976, 1977). The following is a brief summary highlighting the major glacial events which resulted in the development of the surficial aggregate deposits in these townships.

A strong advance of the Georgian Bay lobe of the continental ice sheet created a drumlinized land surface in Keppel and Sarawak Townships. The drumlins are streamlined, elongated hills oriented in a northeast-southwesterly direction reflecting the local direction of ice movement. The material found in the drumlins is till. The texture of this till ranges from gravelly silt to silty clay making it unsuitable for aggregate use. The land surface between the drumlins also predominantly consists of till, which is described as a yellowish brown, loose, strong, sandy silt material. Sharpe (1977) recognized two local facies of this till: one above the Niagara Escarpment, one below. Generally, the till above the Escarpment is very bouldery and loose. The till below the escarpment, on the other hand, has a more reddish colour and contains more clay and silt. The texture and material composition of the till above and below the Escarpment reflects the nature of the underlying bedrock stratum. The presence of silt and clay renders the till unacceptable for use as aggregate in both townships.

During an oscillatory retreat of the ice margin, small moraines such as the Tara Moraines (consisting of till and/or ice-contact stratified drift, often deltaic in origin), smaller ribbed morainic ridges of till, and eskers containing gravel and sand were formed. Often these ice-marginal deposits are found draped over the drumlinized till plain. The most pronounced morainic ridge in these two townships is located in Keppel Township between Town Line Lake and The Long Swamp. This morainic ridge is part of the Tara Moraines ridge sequence. In Derby Township, to the south, a large part of this morainic ridge contains considerable amounts of sand and gravel. Field checking of the ridge in Keppel Township suggests that it consists mostly of till, and therefore has not been outlined on Map 1.

Several small ice-contact stratified drift deposits, not associated with moraines, were also left behind by the melting ice sheet. They include hummocky kame and eskerine features randomly scattered on top of the Niagara Escarpment in Keppel Township. The origin of the ice-contact features is attributed to deposition of material by meltwaters in depressions or fissures in the ice surface or at its margin. Eskers were developed by meltwaters flowing under or through the ice. The material found in these deposits is often dirty, stratified sand and fine gravel. A few small pits have been

opened in the past in these deposits to provide aggregate for local use.

As the margin of the ice withdrew to the north, meltwaters ponded in front of the ice margin, eventually giving rise to glacial Lake Algonquin approximately 10 500 years ago. Further retreat of the ice front and the associated uplift of the land resulted in the flooding of lake basins in the south resulting in the formation of glacial Lake Nipissing about 5000 years ago. These two prominent glacial lakes altered the landscape of these townships. Their effects included the eroding and reworking of older glacial sediments as well as the deposition of glaciolacustrine gravel, sand, silt, and clay. Granular deposits are located at or below the wave-cut bluffs of glacial Lakes Algonquin and Nipissing at 775 to 750 feet (236 to 229 m) and 650 to 625 feet (198 to 190 m) above sea level (a.s.l.), respectively. The age of lacustrine sand and gravel deposits below the 625-foot (190 m) contour elevation is regarded as Post Nipissing to modern day. These shallow deposits are found along the shoreline in both townships. Large, well developed glacial Lake Algonquin beach bars are found at numerous locations, with the largest in Sarawak Township. These deposits contain 10 to 20 feet (3 to 6 m) of often dirty and cobbly, fine to coarse gravel. They have traditionally been local sources of aggregate. A number of wayside and licenced pits have been opened in these deposits leaving some of them nearly depleted.

In areas of shallow water, sand was deposited forming glaciolacustrine sand plains. These sand plains are extensive in south Sarawak Township and west of Shallow Lake in Keppel Township. Following lake regression, sand dunes were developed by westerly winds on the large sand plain west of Shallow Lake. The sand of these plains and the sand dunes is very fine, often silty, severely limiting its use as an aggregate source. In areas where the glacial lakes were deeper, massive to laminated silt and clay were deposited. These sediments are not suitable for aggregate use.

More recent alluvial sediments, consisting of silt, sand, clay and some fine gravel, are present along the banks of the creeks. In poorly drained areas, swampy and marshy conditions have developed. Organic and recent alluvial sediments lack any aggregate potential.

EXTRACTIVE ACTIVITY

A total of eleven sand and gravel pits were identified in Keppel and Sarawak Townships. Most of the pits are nearing depletion or were inactive at the time of field investigation. At present, there are five properties in Keppel Township and one property in Sarawak Township licenced to operate under the Pits and Quarries Control Act. The licenced areas in Keppel and Sarawak are 338.6 acres (137.0 ha) and 18.3 acres (7.4 ha), respectively.

Extractive activities have been concentrated in the larger ice-contact stratified drift and glaciolacustrine beach deposits. Aggregate use and quality data obtained from the Ontario Ministry of Transportation and Communications (M.T.C.) (Deike 1982) indicate that in the past the aggregate from these deposits has been generally acceptable for the production of Granular Base Course (G.B.C.) A, B and C, Hot-Laid

(H.L.) No. 4 stone, pit-run aggregate and select subgrade material.

Records of production from all licenced and wayside pits have been kept by the Owen Sound District Office of the Ontario Ministry of Natural Resources since designation of the townships in 1972. The average annual production from licenced sources in the report area for the five-year period (1978-1982) was approximately 183,000 tons (166 000 tonnes). Production of sand and gravel for the same period from wayside pits (for which permits rather than licences are required) showed a considerable fluctuation from year to year in both townships reflecting the varying intensity of road-construction activities in these areas. Total average annual production from wayside pits in the report area between 1978 and 1982 was approximately 130,000 tons (118 000 tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREAS

Map 1 shows all the surficial deposits which contain sand and gravel in Keppel and Sarawak Townships. Unlike the aggregate-rich townships of southern Grey County, these townships lack large deposits of high quality sand and gravel. In Keppel Township, the total area occupied by sand and gravel deposits is approximately 4900 acres (1980 ha), representing an original tonnage of 113 million tons (102 million tonnes). In Sarawak Township, granular deposits cover 1760 acres (710 ha) and contain an approximate resource tonnage of 36 million tons (33 million tonnes). Most of these resources have limited value for reasons of deposit size, thickness and quality of the material. Consequently, only the most significant resource areas are suggested for possible resource protection.

One ice-contact gravel deposit in Keppel Township and the large lacustrine beach gravel deposit in Sarawak Township have been chosen as aggregate resource areas of primary value (Map 2). Aggregate use and quality data obtained from M.T.C. (Deike 1982) indicate that, after suitable processing techniques are employed, these deposits have been able to meet requirements for granular base course and H.L. 4 and 8 stone products in the past, because of the presence of sufficient quantities of crushable gravel.

Sources of secondary value include smaller and shallower ice-contact stratified drift and glacial Lake Algonquin beach deposits. All of these deposits are located in Keppel Township and are also shown on Map 2. Although these deposits are not the "best" sources, they should be regarded as part of Keppel Township's total aggregate supply because of the general scarcity of surficial aggregate deposits in the township. Other deposits such as the shallow beach and lacustrine plain deposits are less important and have been classed at the tertiary level of significance.

SELECTED SAND AND GRAVEL RESOURCE AREA 1

Selected Sand and Gravel Resource Area 1 is an ice-contact stratified drift deposit located north of Shepherd Lake near the western boundary of Keppel Township. Two gravel pits have been opened in this deposit in the past. The first one was a wayside pit on the south side of the township road which cuts across

the northern part of the deposit. This pit has been completely depleted and its area has been rehabilitated. The presently active pit is a licenced operation (pit no. 4) situated on 29.1 acres (11.8 ha) in the centre of the resource area. At the time of field checking, pit faces exposed 10 to 20 feet (3 to 6 m) of clean, horizontally stratified, crossbedded sand and angular cobbly gravel. Visual estimates of overall gravel content ranged from 20 to 40 percent with higher stone content occurring in isolated pockets. Crushable gravel content was estimated to range from 10 to 40 percent.

The M.T.C. has sampled and tested the aggregate from pit no. 4 for petrographic quality, Los Angeles abrasion and absorption. Test results reported by Deike (1982) indicate that the material can meet M.T.C. requirements for the production of granular base course, hot-mix and structural concrete products if appropriate processing techniques are carried out. Pit no. 4 falls within the moderate to high pit use rating criteria of M.T.C. Therefore, this source is capable of producing H.L. 4 stone, G.B.C. A and other lower specification aggregate products. The geological origin and the hummocky appearance of the resource area suggest that considerable variability in aggregate quality and quantity may be encountered in the yet unexplored parts of the resource area.

Resource Area 1 has an unlicensed area of 110 acres (44 ha). After deletions for cultural constraints and previous extraction, 95 acres (38 ha) remain currently available for extraction. Based on an estimated deposit thickness of 20 feet (6 m), total available aggregate resources are approximately 5 million tons (4 million tonnes).

SELECTED SAND AND GRAVEL RESOURCE AREA 2

Selected Sand and Gravel Resource Area 2 is a large glacial Lake Algonquin beach bar located in Sarawak Township. The deposit extends from north of the Owen Sound Airfield to the hamlet of Hogg along County Road 1. Numerous gravel pits have been opened in the deposit in the past leaving substantial areas depleted. In addition to providing aggregate for local use this resource area is also an important source of aggregate for Keppel Township and the City of Owen Sound. Because of the resource area's proximity to Owen Sound, much of the remaining reserves face sterilization by commercial and housing developments.

Presently, there is one licenced property (pit no. 1) in the resource area with a licenced acreage of 18.3 acres (7.4 ha). Pit faces in this and an adjacent property now depleted showed 10 to 20 feet (3 to 6 m) of tabular, rounded to subrounded, cobbly fine to coarse gravel in a matrix of reddish coloured silty sand. The top 4 to 8 feet (1.2 to 2 m) of the gravel in pit no. 2 face was badly weathered and excessively dirty. Field estimates of gravel content ranged from 60 to 90 percent gravel.

A sample taken from pit no. 2 was submitted for testing to M.T.C. Test results yielded Petrographic Numbers ranging from 105 to 153. Magnesium Sulphate Soundness loss was 5.2 percent and absorption loss was 2.2 percent. Grain size analysis (Figures 4a and 4b) indicated 71 percent gravel, of which 42

percent was in the crushable size range (greater than 26.5 mm), 21 percent sand and 8 percent fines. This data indicates that the aggregate from this location is best suited for the production of low-specification aggregate products, such as select subgrade material and G.B.C. A, B and C.

Low petrographic quality, excessive absorption losses, and excessive dirt content are the major restricting factors for this material. These characteristics are attributed to the source material from which the whole deposit was derived, which includes mostly the soft shales and porous dolostone found near the base of the Niagara Escarpment and the till which was also derived from these rocks. Although aggregate quality data are lacking for other parts of the deposit, the aggregate likely will be of similar quality throughout.

Resource Area 2 in Sarawak Township has an unlicensed area of 455 acres (184 ha). After deletions for cultural constraints and previously extracted areas there are approximately 70 acres (28 ha) left available for extraction. Assuming an average deposit thickness of 15 feet (5 m), the total available aggregate resources are estimated at 3 million tons (3 million tonnes). The resource area is easily accessible by paved roads which cut across it in a number of places.

SAND AND GRAVEL RESOURCE AREAS OF SECONDARY SIGNIFICANCE

Several deposits located in Keppel Township have been selected as Sand and Gravel Resource Areas of Secondary Significance. These deposits contain similar materials as the ones selected at the primary level, however, aggregate quality is more widely varied and remaining reserves are limited because of smaller deposit size. Also, the possibility of finding fine aggregates is higher in these deposits. Protection measures should be considered for these resource areas since they provide alternate extractive sites.

All the easily accessible ice-contact stratified drift deposits with thicknesses in excess of 5 feet (1.5 m) have been included at the secondary level. Several abandoned pits and licenced pit no. 5 are located in these deposits. Gradation test results (Figures 2a and 2b, 3a and 3b) indicate that the gravel content in these deposits lies between 30 and 50 percent. Petrographic analyses indicate that the coarse aggregate could be used for the production of G.B.C. A and H.L. 4 stone, given that sufficient quantities of crushable gravel were available. Unfortunately, dirty sections and deleterious lithologies such as shale and siltstone fragments, often restrict the use of these deposits to G.B.C. B and C, and select subgrade material only. The inherent variability of ice-contact deposits makes assessment difficult without further detailed investigations.

Eight beach deposits of glacial Lake Algonquin have also been included as secondary resource areas. There are several pits (pit nos. 1, 2, 3, 6, 7 and 9) in these deposits, with most of them nearing depletion. Pit faces show 5 to 20 feet (1.5 to 6 m) of medium to coarse sand with fine rounded gravel. Often the sand grades into silt and clay and has a reddish colour indicating the deleterious influence of the shales in the area. Gravel content averages 10 to 40 percent. Petrographic quality is highly variable. Petrographic

numbers ranging from 120 to unacceptable highs of 205 have been obtained indicating the considerable variability of aggregate quality in these deposits. Aggregate quality data obtained from M.T.C. (Deike 1982) show that cleaner sections of these deposits have been found acceptable for the production of H.L. 4 stone and G.B.C. C, when sufficient percentages of crushable gravel were available. All of the lacustrine beach deposits are capable of supplying pit-run gravel, G.B.C. B and C, and select subgrade material. The largest remaining reserves of beach gravel are located in the unexploited parts of the large beach deposit south of North Keppel.

The extensive lacustrine sand plain northwest of Shallow Lake has also been included as a secondary resource area. The sand in this deposit is very clean and very fine. It is too fine for blending sand or other aggregate use, however, it may be used as a local source of clean fill.

BEDROCK GEOLOGY

Keppel and Sarawak Townships are underlain by the Upper Ordovician shales of the Georgian Bay and Queenston Formations as well as the Lower to Middle Silurian bedrock of the Manitoulin, Cabot Head, Fossil Hill, Amabel and Guelph Formations. The distribution and stratigraphic relationships of these formations are shown on Map 3 (after Liberty and Bolton 1971). The bedrock surface is relatively flat and the formations have a gentle regional dip to the southwest. Glacial sediments which overlie the bedrock surface are generally less than 25 feet (8 m) thick with abundant bedrock outcrops on the Niagara Escarpment and north of the Escarpment along the Georgian Bay shoreline. The Niagara Escarpment, itself, is a dominant geological and geomorphological bedrock feature in southern Ontario. In Keppel and Sarawak Townships, the brow of the Escarpment attains heights of 400 to 450 feet (122 to 137 m) above the water level of Georgian Bay and forms the western wall of the large Owen Sound re-entrant valley. In this area, the Escarpment consists of a prominent bluff of Amabel dolostone and a secondary flat bench of Manitoulin dolostone.

The Georgian Bay Formation is the oldest bedrock unit and consists of alternating grey carbonate beds and grey to bluish grey shale (Liberty and Bolton 1971). The formation is over 400 feet (122 m) thick and, notwithstanding minor lithologic variation, its chemical composition is fairly consistent throughout its occurrence (Vos 1975). In the report area, the formation has only a limited occurrence along the shore of Georgian Bay. Although the shale has been utilized for clay products in other areas, the limited occurrence of the formation prevents it from being selected for resource protection.

The Georgian Bay Formation is overlain by the Queenston Formation which underlies the Owen Sound re-entrant valley and forms the base of the Niagara Escarpment. The formation consists predominantly of red shale with occasional beds of mottled green shale (Liberty and Bolton 1971). The thickness is variable, ranging from 200 to 300 feet (61 to 91 m) in the Owen Sound area. Outcrops and locally drift-

covered areas of Queenston shale are numerous in the Georgian Bay shoreline areas in both townships.

Queenston shale is a resource of provincial significance for the production of structural clay products. Analytical data presented by Guillet (1977) for Queenston shale from the Owen Sound area and the Toronto-Hamilton area indicate, however, that the shale in the Owen Sound area may have less use potential because it tends to have a much higher lime content. Excessive lime content affects final product colour and may also cause cracking of the product during the cooling cycle after firing. The presence of gypsum nodules in the shale is considered to be a deleterious characteristic because even in minor quantities it can cause the appearance of an unsightly light-coloured film on the surface of the finished product (Guillet 1967). Queenston shale samples taken from the Owen Sound area also failed to produce acceptable test results for expanded aggregate use (Wilson 1963). Although there is an intermittent history of small scale brick and tile manufacture from Queenston shale in the Owen Sound area (Guillet 1967), the Queenston shale has not been selected for possible resource protection because of the quality limitations discussed above.

The Queenston Formation is overlain by the grey and bluish grey, thin- to medium-bedded, fine-grained dolomitic limestone of the Manitoulin Formation. Argillaceous partings which weather into thin irregular beds, white weathering chert in thin nodular layers or in nodules, and traces of pyrite are often common in this rock formation. Goudge (1938) reported that in several now-abandoned quarries in the neighbouring City of Owen Sound the cherty Manitoulin Formation was extracted for use as crushed stone, rubble and foundation stone.

In Keppel and Sarawak Townships the Manitoulin Formation forms a thinly drift-covered flat bench paralleling the north-facing side of the Escarpment. Outcrops are common and are best exposed at roadcuts in the Escarpment. A sample of Manitoulin bedrock collected in Sydenham Township from a roadcut face at Lot 25, Concession 3 has been analyzed by M.T.C. Petrographic analysis of the sample showed that this dolomitic limestone may be acceptable for low-specification road-building aggregate but its quality is not sufficiently high to meet the requirements for use in any hot-laid or concrete aggregate applications. Another exposure sampled by M.T.C. in Sarawak Township from a proposed quarry site showed similar results (B.H. Feenstra, Mineral Resources Geologist, Southwestern Region, Ontario Ministry of Natural Resources, London, personal communication, 1984). Because of the availability of better quality bedrock resources in the Amabel Formation dolostone, the Manitoulin Formation has not been selected for possible resource protection.

The maroon and green non-calcareous shale and calcareous carbonate beds of the Cabot Head Formation overlie the Manitoulin Formation and form much of the face of the Niagara Escarpment (Liberty and Bolton 1971). The shale is too soft for the production of load-bearing aggregate. However, Vos (1969) reports that Cabot Head shale is generally acceptable for the production of brick, tile, and expanded aggregate, but there is no production from this formation largely

because of the lack of suitable exposures for quarrying. The formation has been mapped together with the Manitoulin Formation on Map 3 and has not been selected for possible resource protection.

The Fossil Hill Formation can be observed overlying the Cabot Head shale along the face of the Niagara Escarpment. This formation is described as a grey-weathering brown, thin, irregularly bedded, fossiliferous, often cherty dolostone. The contact between this formation and the overlying Amabel Formation is well exposed at Wiarton and in neighbouring Sydenham Township to the east, along King's Highway 26 at the Woodford roadcut (Telford and Narain 1980). The lower contact with the underlying Cabot Head Formation is also well exposed in Sarawak Township near Owen Sound. There is no production of aggregate products from the Fossil Hill Formation because of easier access to the better quality Amabel Formation. The Fossil Hill Formation has been mapped together with the Amabel Formation on Map 3.

The erosion-resistant Amabel Formation dolostone forms the cap rock of the Niagara Escarpment and underlies a large part of the report area. The formation, in this area, largely consists of fine-grained dolostone, although minor amounts of porous medium- to coarse-grained dolostone and patches of thin-bedded, dark brown, bituminous dolostone also occur. Minor quantities of chert may also be present, especially near the base of the formation. Chert is a deleterious material and, if present in excessively high quantity, may restrict the use of the dolostone to low grade aggregate products.

The Amabel Formation is suitable for use in crushed stone, concrete aggregate, building stone and as raw material for lime manufacture. The Amabel is considered an aggregate source of provincial significance because of its generally high quality. Those areas of the Amabel Formation that are overlain by less than 25 feet (8 m) of drift in Keppel and Sarawak Townships have been selected for possible resource protection.

The Amabel Formation often contains an abundance of reefs which are commonly 50 to 60 feet (15 to 18 m) in height and a few hundred feet in diameter (Hewitt 1960). Reef rock from the Amabel Formation is highly porous (and therefore absorptive), softer and less durable than the surrounding rock, and may contain clay pockets and iron staining, particularly near the surface (Hewitt 1960). For these reasons the quality of the reefal rock may be impaired for use as aggregate. However, the inter-reef rock deposited between the reefs is of high quality and is well suited for extraction and use. Extractive operations are, therefore, better located in the inter-reef areas.

Inter-reef areas are also the locations where patches of the thin-bedded, dark brown, bituminous dolostone occur which are commonly referred to as the Eramosa Member of the Amabel Formation. Although the Eramosa Member is not suitable for load-bearing aggregate use, it is quarried at two locations in Keppel Township for the production of various kinds of dimension stone and it can also be polished to an attractive decorative stone.

The Guelph Formation is the youngest bedrock unit in the report area. The formation is a buff and brown, fine- to medium-grained dolostone and both reefal and inter-reefal varieties occur (Liberty and Bolton 1971). The massive, porous, softer, coarser-grained reefal structures are not as well suited for aggregate use as the evenly bedded, inter-reefal dolostone. The Guelph Formation dolostone is also a valuable raw material for a range of metallurgical products because of the usually high chemical purity, and is quarried for the production of dolomitic lime near Guelph and Hamilton. The Guelph Formation has not been selected for possible resource protection because very large resources of more durable Amabel dolostone are available in the township and local markets for metallurgical products are lacking.

SELECTED BEDROCK RESOURCE AREAS 1a TO 1i AND 2a TO 2i

Selected Bedrock Resource Areas 1a to 1i and 2a to 2i consist of all those areas where the Amabel Formation dolostone is overlain by less than 25 feet (8 m) of glacial sediments in both Keppel and Sarawak Townships. The northern and eastern limits of these areas are defined by the brow of the Niagara Escarpment, which trends northeast-southwest across these townships. Most of the resource areas are very thinly drift covered, except for a few patchy areas where the bedrock is masked by a drumlinized till plain. Detailed calculations for individual resource areas showing acreages and estimated reserves are presented in Table 6 separately for both townships.

At the turn of the century, several now-abandoned quarries had been opened in Amabel dolostone along the Niagara Escarpment in the Owen Sound area (Goudge 1938). More recently, a crushed stone quarry was developed in Sydenham Township to the east. The quarry face exposes 30 to 40 feet (9 to 12 m) of grey and buff, mottled, medium- to fine-crystalline, moderately porous, medium- to thick-bedded, occasionally fossiliferous and vuggy dolostone. Products available from this quarry include a variety of fine and coarse crushed aggregate as well as general oversize rock products. Test data obtained from M.T.C. for samples taken from this quarry show that the material is satisfactory for most high-specification uses, although absorption test results for some of the samples exceed the allowable limits (Deike 1982). The Amabel dolostone in Keppel and Sarawak Townships is expected to have similar quality, except for those areas where the Eramosa Member is dominant.

The Eramosa Member is not suitable for aggregate production because it is thinly bedded and tends to break along abundant shaly partings, resulting in poor soundness for construction aggregate uses. These same characteristics, however, make it an ideal source for the production of a variety of dimension stone including polished stone. Two properties, quarry nos. 1 and 2, have been licenced in Keppel Township to produce dimension stone. The face in quarry no. 2 consists of 4 to 6 feet (1.2 to 2 m) of thin, evenly bedded, brown, aphanitic dolostone with shaly partings, allowing removal of the rock in 1-inch (2.5 cm) to 2-inch (5 cm) thick slabs. The slabs are further broken down mechanically to produce a variety of

sized dimension stone products. Quarry no. 1 is located west of Mountain Lake and was licenced more recently to produce ledgerock. In this property, the quarry face exposes 4 to 6 feet (1.2 to 2 m) of Eramosa dolostone. At the time of field checking, there was only a very small area which showed signs of previous extraction.

Although the Amabel dolostone is usually of high quality, the porous reefal structures and chert, where encountered, may restrict some high-specification uses of the aggregate. For these reasons, the quality of the bedrock should be investigated at specific sites proposed for possible future quarry development before extraction begins. A significant thickness of Amabel dolostone may be suitable for quarrying as exposures of up to 40 feet (12 m) can be observed along the brow of the escarpment and the formation's thickness increases in an apparent southwesterly direction away from the Escarpment (Vos 1969).

The selected bedrock resource areas in Keppel Township have a combined total unlicenced area of 53,000 acres (21 400 ha), of which 46,500 acres (18 800 ha) are presently available for extraction. Assuming an average workable thickness of 60 feet (18 m), available bedrock resources are estimated to be approximately 10 100 million tons (9200 million tonnes). In Sarawak Township, selected bedrock resource areas occupy a combined unlicenced area of 1700 acres (690 ha). After considerations for cultural setbacks, 1200 acres (485 ha) remain available for extraction. Using 60 feet (18 m) as an estimated workable thickness, this translates into 260 million tons (236 million tonnes) of available bedrock resources. Considerable portions of the selected resource areas near the edge of the Escarpment lie within policy areas of the Niagara Escarpment Commission and may be unavailable for future extractive development. There exist, however, alternate locations within the selected resource areas for possible future quarry developments should local or regional markets so demand. The resource areas are easily accessible by King's Highways 6 and 70, by numerous paved municipal roads and by a Canadian National Railways line which connects Owen Sound and Wiarton to other destinations to the south.

SUMMARY

The sand and gravel deposits of Keppel and Sarawak Townships are the product of glacial processes which took place during the Late Wisconsinan Substage of the Pleistocene Epoch. The deposits have been mapped as generally shallow accumulations of ice-contact stratified drift, glaciolacustrine beach and glaciolacustrine plain deposits. These deposits offer limited remaining reserves of aggregate which are best suited for low-specification use. One ice-contact deposit in Keppel and one beach deposit in Sarawak Township have been selected at the primary level of significance. Numerous smaller deposits of variable aggregate quality also have been included at the secondary level of significance to augment the primary resource areas. Care should be taken to ensure the continued availability of as much of these resources as possible. The presently available possible resources of sand and gravel will be insufficient to meet local needs in the future and will require consideration of alternate sources.

The townships are underlain by Upper Ordovician to Middle Silurian age shales and dolostones of the Niagara Escarpment. The Amabel Formation, which is the caprock of the Escarpment, is considered the most acceptable for extractive development. The generally high quality Amabel dolostone can be used for the production of a wide range of crushed stone and industrial mineral products. Two large areas of thinly drift-covered Amabel dolostone have been selected for possible resource protection. The availability of some of the bedrock resources may be restricted because they fall within the policy areas of the Niagara Escarpment Commission.

Enquiries regarding the Aggregate Resources Inventory of Keppel and Sarawak Townships should be directed to the Ontario Ministry of Natural Resources either at the Owen Sound District Office, 611 - 9th Avenue East, Owen Sound, Ontario, N4K 3E4 (Tel. (519) 376-3860) or at the Southwestern Region Geological Office, 458 Central Avenue, London, Ontario, N6B 2E5 (Tel. (519) 433-8431).

AGGREGATE RESOURCES INVENTORY

TABLE 1. TOTAL SAND AND GRAVEL RESOURCES, KEPPEL AND SARAWAK TOWNSHIPS*.

1	2	3	4	1	2	3	4
Class No.	Deposit Type (see Appendix C)	Areal Extent Acres (Hectares)	Original Tonnage Millions of Tons (Tonnes)	Class No.	Deposit Type (see Appendix C)	Areal Extent Acres (Hectares)	Original Tonnage Millions of Tons (Tonnes)
Keppel Township							
1	G-IC	140 (57)	7 (6)	4	G-IC	52 (21)	<1 (<1)
	G-LB	195 (79)	10 (9)		G-LB	229 (93)	2 (2)
2	G-LB	330 (134)	10 (9)		S-IC	50 (20)	<1 (<1)
	S-E	79 (32)	3 (3)		S-LB	107 (43)	1 (1)
	S-IC	116 (47)	4 (4)		S-LP	980 (395)	10 (9)
	S-LB	121 (49)	5 (4)			4900 (1980)	113 (102)
	S-WD-LP	500 (202)	19 (17)	Sarawak Township			
3	G-IC	120 (49)	5 (4)	2	G-LB	495 (200)	19 (17)
	G-LB	170 (69)	3 (3)		S-LP	156 (63)	6 (5)
	S-E	27 (11)	<1 (<1)	4	G-LB	199 (80)	2 (2)
	S-IC	500 (202)	10 (9)		S-LP	910 (370)	9 (8)
	S-LB	77 (31)	2 (2)			1780 (710)	36 (33)
	S-WD-LP	1090 (440)	22 (20)			6700 (2700)	149 (135)

N.B. Minor variations in all tables are caused by rounding of data.

*Identified deposit areas within the City of Owen Sound, the Town of Hepworth, and the Villages of Shallow Lake and Hepworth are omitted on all tables.

KEPPEL AND SARAWAK TOWNSHIPS

TABLE 2. SAND AND GRAVEL PITS, KEPPEL AND SARAWAK TOWNSHIPS.

1 No.	2 MTC No.	3 Owner/ Operator	4 Lot	5 Con.	6 Licenced Areas Acres (Hectares)	7 Face Height Feet (Metres)	8 % Gravel
Keppel Township							
LICENCED PITS							
1	C02-056	Kenneth Wright	25	Colpoy's Range	5.1 (2.1)	5-10 (1.5-3)	0
2	W06-112	Mrs. Jean E. Henry	S.Pt.11	21	32.0 (13.0)	5-10 (1.5-3)	10-40 (depleted)
3	W06-059	Wesley Charlton	Pl.10	17	13.9 (5.6)	7-10 (2-3)	20-40 (depleted)
4	W06-022	Larry J. Miller	33,34	2NCD	29.1 (11.8)	10-20 (3-6)	20-80
5	-	Shouldice Cement Products Ltd.	Pl.28, 29,30	1NDR	258.5 (104.6)	5 (1.5)	0-20
					338.6 (137.0)		
UNLICENCED PITS*							
6	-	Unknown	35	26		10-15 (3-5)	60-80 (depleted)
7	-	Unknown	37	25		10-15 (3-5)	60-80 (partially depleted)
8	-	Carson	29	1NDR		7-10 (2-3)	10-30 (depleted)
9	-	Thomas M. Jones	11	21		10-20 (3-6)	(rehabili- tated)
Sarawak Township							
LICENCED PITS							
1	O06-038	Harold Sutherland	24	2	18.3 (7.4)	10-20 (3-6)	50-80
UNLICENCED PITS*							
2	O06-056	Harold Sutherland	23	2		10-20 (3-6)	60-90 (depleted)

N.B. Minor variations in all tables are caused by rounding of data.

*Abandoned pits or wayside pits operating on demand under authority of a permit.

AGGREGATE RESOURCES INVENTORY

TABLE 3. SELECTED SAND AND GRAVEL RESOURCE AREAS, KEPPEL AND SARAWAK TOWNSHIPS.

1 Deposit No.	2 Unlicenced Area Acres (Hectares)	3 Cultural Setbacks Acres (Hectares)	4 Extracted Area Acres (Hectares)	5 Available Area Acres (Hectares)	6 Estimated Deposit Thickness Feet (Metres)	7 Available Aggregate Millions of Tons (Tonnes)
Keppel Township						
1	110 (44)	10 (4)	5 (2)	95 (38)	20 (6)	5 (4)
Sarawak Township						
2	455 (184)	365 (148)	20 (8)	70 (28)	15 (5)	3 (3)
	560 (227)	375 (152)	25 (10)	165 (67)		8 (7)

N.B. Minor variations in all tables are caused by rounding of data.

TABLE 4. TOTAL IDENTIFIED BEDROCK RESOURCES, KEPPEL AND SARAWAK TOWNSHIPS

1 DRIFT THICKNESS Feet (Metres)	2 FORMATION	3 ESTIMATED DEPOSIT THICKNESS Feet (Metres)	4 AREAL EXTENT Acres (Hectares)	5 ORIGINAL TONNAGE Millions of Tons (Tonnes)
Keppel Township				
0-3	Georgian Bay	60	147	29
(0-1)		(18)	(60)	(26)
3-25	Georgian Bay	60	108	21
(1-8)		(18)	(44)	(19)
			255	50
			(103)	(45)
0-3	Queenston	60	4500	890
(0-1)		(18)	(1820)	(810)
3-25	Queenston	60	690	137
(1-8)		(18)	(280)	(124)
			5200	1030
			(2100)	(930)
0-3	Cabot Head & Manitoulin	60	4250	820
(0-1)		(18)	(1720)	(740)
3-25	Cabot Head & Manitoulin	60	11,200	2150
(1-8)		(18)	(4550)	(1950)
25-50	Cabot Head & Manitoulin	60	76	15
(8-15)		(18)	(31)	(14)
			15,500	3000
			(6300)	(2700)
0-1	Amabel & Fossil Hill	60	26,500	5700
(0-1)		(18)	(10 700)	(5170)
3-25	Amabel & Fossil Hill	60	27,000	5800
(1-8)		(18)	(10 900)	(5260)
25-50	Amabel & Fossil Hill	60	2300	495
(8-15)		(18)	(930)	(450)
			56,000	12,000
			(22 700)	(10 900)
0-3	Guelph	60	2950	640
(0-1)		(18)	(1190)	(580)
3-25	Guelph	60	10,000	2160
(1-8)		(18)	(4050)	(1960)
25-50	Guelph	60	720	156
(8-15)		(18)	(290)	(142)
			13,700	2950
			(5500)	(2700)
			91,000	19,000
			(37 000)	(17 200)

N.B. Minor variations in all tables are caused by rounding of data.

AGGREGATE RESOURCES INVENTORY

TABLE 4. TOTAL IDENTIFIED BEDROCK RESOURCES, KEPPEL AND SARAWAK TOWNSHIPS

1 DRIFT THICKNESS Feet (Metres)	2 FORMATION	3 ESTIMATED DEPOSIT THICKNESS Feet (Metres)	4 AREAL EXTENT Acres (Hectares)	5 ORIGINAL TONNAGE Millions of Tons (Tonnes)
Sarawak Township				
3-25 (1-8)	Georgian Bay	60 (18)	35 (14)	7 (8)
0-3 (0-1)	Queenston	60 (18)	690 (280)	137 (124)
3-25 (1-8)	Queenston	60 (18)	1470 (600)	290 (265)
25-50 (8-15)	Queenston	60 (18)	152 (62)	30 (27)
			2310 (940)	455 (415)
0-3 (0-1)	Cabot Head & Manitoulin	60 (18)	2050 (830)	395 (360)
3-25 (1-8)	Cabot Head & Manitoulin	60 (18)	3950 (1600)	760 (690)
25-50 (8-15)	Cabot Head & Manitoulin	60 (18)	490 (198)	94 (85)
			6500 (2650)	1250 (1130)
0-3 (0-1)	Amabel & Fossil Hill	60 (18)	1400 (570)	300 (270)
3-25 (1-8)	Amabel & Fossil Hill	60 (18)	325 (132)	70 (64)
			1720 (700)	370 (335)
			10,600 (4300)	2080 (1890)
			102,000 (41 500)	21,100 (19 100)

N.B. Minor variations in all tables are caused by rounding of data.

TABLE 5. QUARRIES, KEPPEL AND SARAWAK TOWNSHIPS.

1 NO.	2 MTC NO.	3 OWNER/ OPERATOR	4 LOT	5 CON.	6 LICENCED AREA Acres (Hectares)	7 FACE HEIGHT Feet (Metres)
Keppel Township						
LICENCED QUARRIES						
1	-	Cliff McCartney	7,8,9	18	29.8 (12.1)	4-6 (1.2-2)
2	W06-088	Owen Sound Ledgerock Ltd.	Pt. 17	4	28.0 (11.3)	4-6 (1.2-2)
					57.8 (23.4)	
Sarawak Township						
			-none-			

AGGREGATE RESOURCES INVENTORY

TABLE 6. SELECTED BEDROCK RESOURCE AREAS, KEPPEL AND SARAWAK TOWNSHIPS.

1 DEPOSIT NO.	2 DEPTH OF OVERBURDEN Feet (Metres)	3 UNLICENCED AREA Acres (Hectares)	4 CULTURAL SETBACKS Acres (Hectares)	5 EXTRACTED AREA Acres (Hectares)	6 AVAILABLE AREA Acres (Hectares)	7 ESTIMATED WORKABLE THICKNESS Feet (Metres)	8 AVAILABLE RESOURCES Millions of Tons (Tonnes)
Keppel Township							
Amabel and Fossil Hill Formations							
1a	0-3 (0-1)	12,600 (5100)	1300 (530)	0 (0)	11,300 (4550)	60 (18)	2440 (2210)
1b	0-3 (0-1)	125 (51)	40 (16)	0 (0)	85 (34)	60 (18)	18 (16)
1c	0-3 (0-1)	155 (63)	35 (14)	0 (0)	120 (49)	60 (18)	26 (24)
1d	0-3 (0-1)	720 (290)	90 (36)	0 (0)	630 (266)	60 (18)	136 (123)
1e	0-3 (0-1)	4700 (1900)	700 (285)	0 (0)	4000 (1620)	60 (18)	860 (780)
1f	0-3 (0-1)	6500 (2650)	500 (202)	0 (0)	6000 (2430)	60 (18)	1300 (1180)
1g	0-3 (0-1)	1590 (640)	290 (117)	0 (0)	1300 (530)	60 (18)	280 (255)
		26,400 (10 700)	2950 (1190)	0 (0)	23,400 (9500)		5100 (4600)
2a	3-25 (1-8)	7100 (2850)	1500 (610)	0 (0)	5600 (2270)	60 (18)	1210 (1100)
2b	3-25 (1-8)	10 (4)	5 (2)	0 (0)	5 (4)	60 (18)	1 (1)
2c	3-25 (1-8)	235 (95)	70 (28)	0 (0)	165 (67)	60 (18)	36 (33)
2d	3-25 (1-8)	390 (158)	85 (34)	0 (0)	305 (123)	60 (18)	66 (60)
2e	3-25 (1-8)	18,100 (7300)	2000 (810)	0 (0)	16,100 (6500)	60 (18)	3500 (3200)
2f	3-25 (1-8)	700 (285)	120 (49)	0 (0)	580 (235)	60 (18)	125 (113)
2g	3-25 (1-8)	235 (95)	30 (12)	0 (0)	205 (83)	60 (18)	44 (40)
		27,000 (10 900)	3800 (1540)	0 (0)	23,000 (9300)		5000 (4550)
		53,000 (21 400)	8800 (2750)	0 (0)	46,500 (18 800)		10,100 (9200)

N.B. Minor variations in all tables are caused by rounding of data.

TABLE 6. SELECTED BEDROCK RESOURCE AREAS, KEPPEL AND SARAWAK TOWNSHIPS.

1 DEPOSIT NO.	2 DEPTH OF OVERBURDEN Feet (Metres)	3 UNLICENCED AREA Acres (Hectares)	4 CULTURAL SETBACKS Acres (Hectares)	5 EXTRACTED AREA Acres (Hectares)	6 AVAILABLE AREA Acres (Hectares)	7 ESTIMATED WORKABLE THICKNESS Feet (Metres)	8 AVAILABLE RESOURCES Millions of Tons (Tonnes)
Sarawak Township							
Amabel and Fossil Hill Formations							
1h	0-3	385	15	0	370	60	80
	(0-1)	(156)	(6)	(0)	(150)	(18)	(73)
1i	0-3	1010	370	0	640	60	138
	(0-1)	(410)	(150)	(0)	(260)	(18)	(125)
		<u>1400</u>	<u>385</u>	<u>0</u>	<u>1010</u>		<u>218</u>
		(570)	(156)	(0)	(410)		(198)
2h	3-25	245	85	0	160	60	35
	(1-8)	(99)	(34)	(0)	(65)	(18)	(32)
2i	3-25	60	35	0	25	60	5
	(1-8)	(24)	(14)	(0)	(10)	(18)	(4)
		<u>305</u>	<u>120</u>	<u>0</u>	<u>185</u>		<u>40</u>
		(123)	(49)	(0)	(75)		(36)
		<u>1700</u>	<u>500</u>	<u>0</u>	<u>1200</u>		<u>260</u>
		(690)	(202)	(0)	(485)		(236)
		<u>55,000</u>	<u>7300</u>	<u>0</u>	<u>47,500</u>		<u>10,400</u>
		(22 300)	(2950)	(0)	(19 200)		(9400)

N.B. Minor variations in all tables are caused by rounding of data.

TABLE 7. SUMMARY OF TEST HOLE DATA, KEPPEL AND SARAWAK TOWNSHIPS.

-NONE-

N.B. Minor variations in all tables are caused by rounding of data.

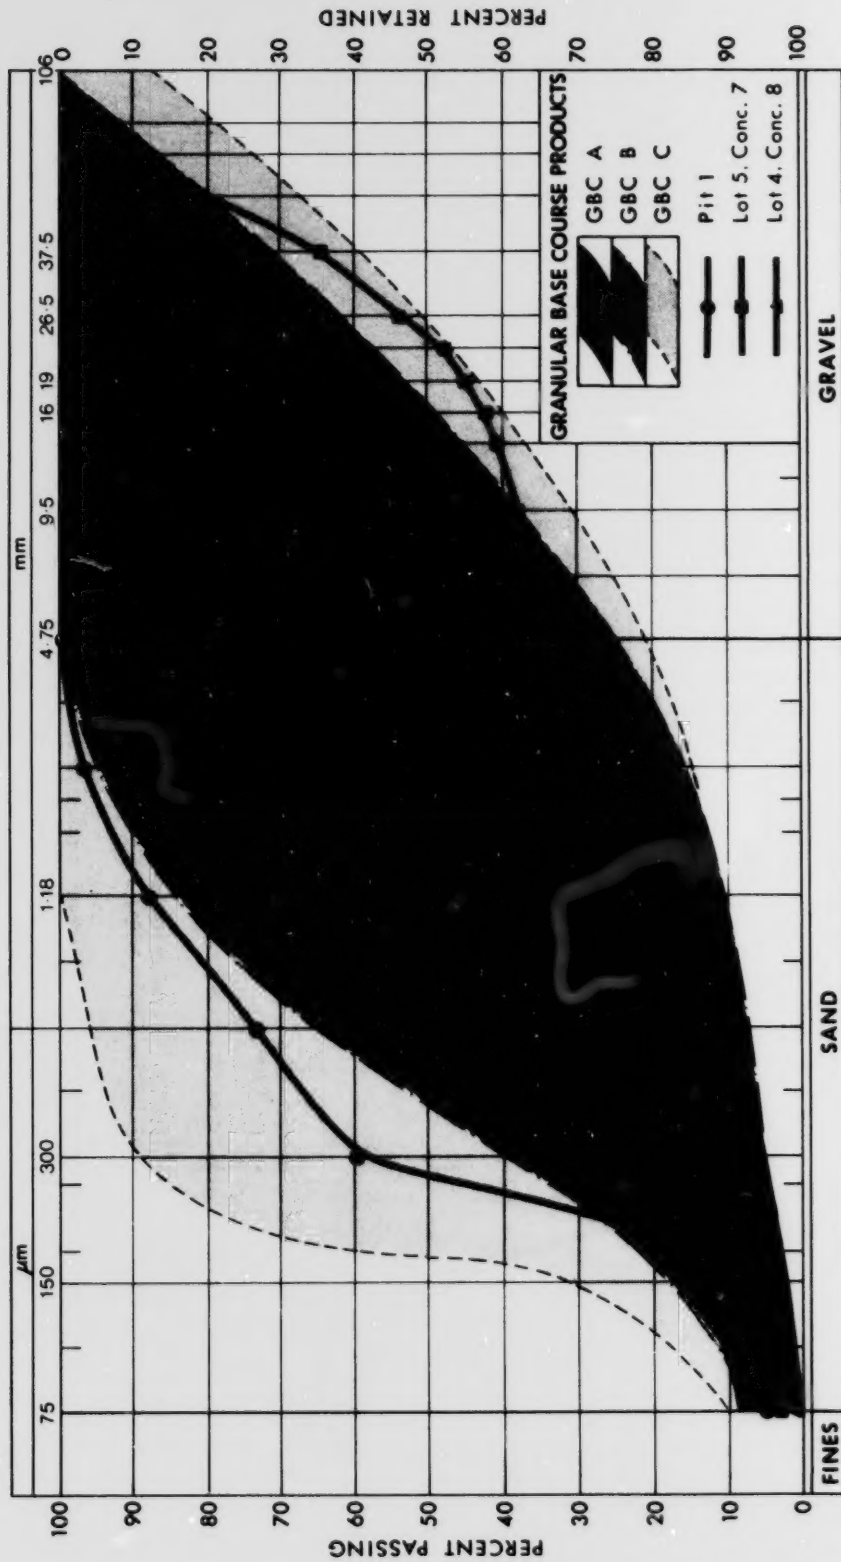


FIGURE 2a: AGGREGATE GRADING CURVES, KEPPEL TOWNSHIP;

Based on analysis of the total aggregate contained in unprocessed samples (gradation envelopes adapted from M.T.C. Form 1010, 1980).

NOTE: Information portrayed by grading curves refers strictly to a specific sample taken at the time of field investigation. Due to the inherent variability of sand and gravel deposits care should be exercised in extrapolating such information to the rest of the deposit.

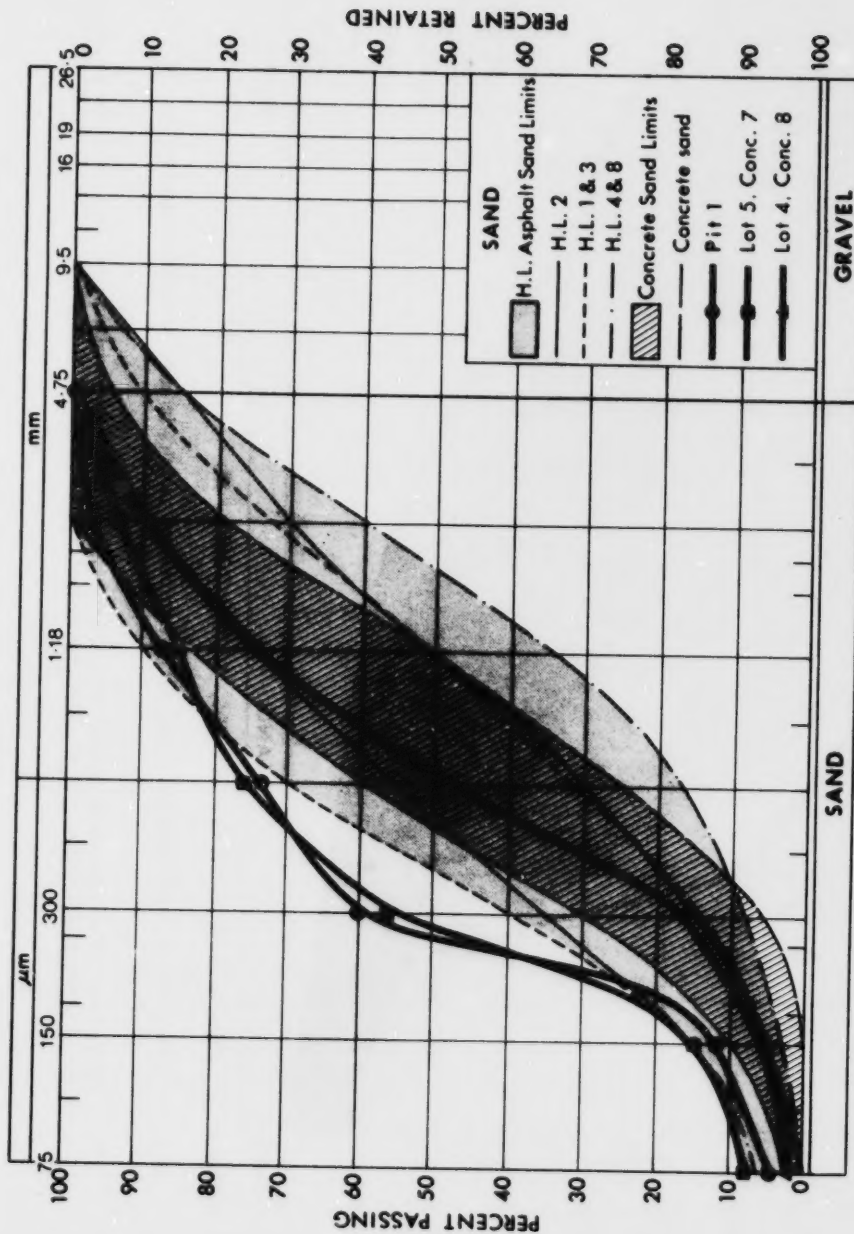


FIGURE 2b: AGGREGATE GRADING CURVES, KEPPEL TOWNSHIP;

Based on analysis of the sand fraction of the aggregate contained in unprocessed samples (gradation envelopes adapted from M.T.C. Forms 1002, 1979 and 1003, 1981).

NOTE:

Information portrayed by grading curves refers strictly to a specific sample taken at the time of field investigation. Due to the inherent variability of sand and gravel deposits care should be exercised in extrapolating such information to the rest of the deposit.

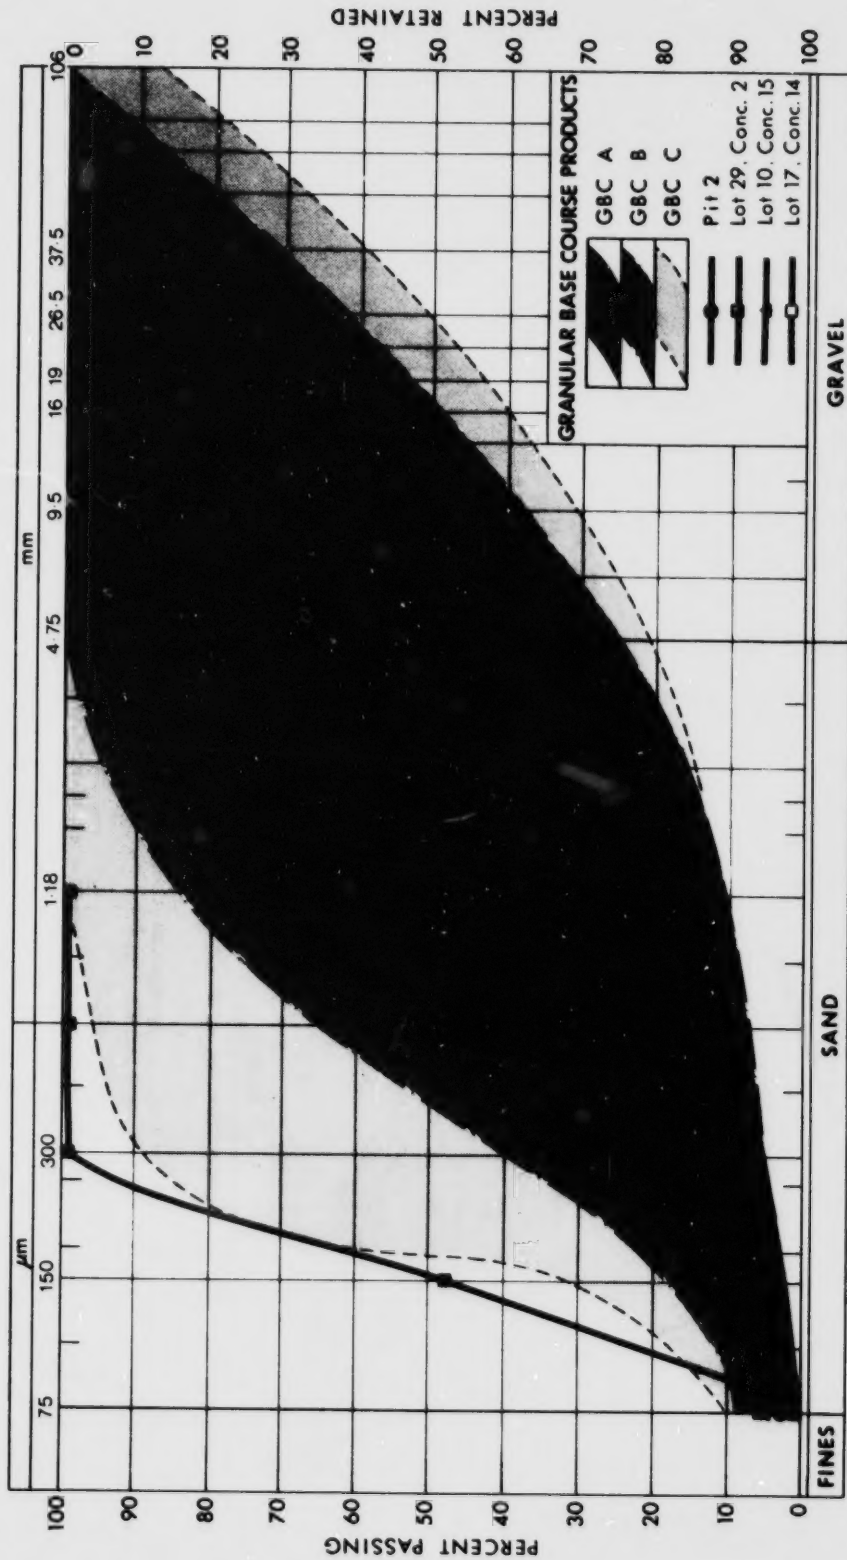


FIGURE 3a: AGGREGATE GRADING CURVES, KEPPEL TOWNSHIP;

Based on analysis of the total aggregate contained in unprocessed samples (gradation envelopes adapted from M.T.C. Form 1010, 1980).

NOTE: Information portrayed by grading curves refers strictly to a specific sample taken at the time of field investigation. Due to the inherent variability of sand and gravel deposits care should be exercised in extrapolating such information to the rest of the deposit.

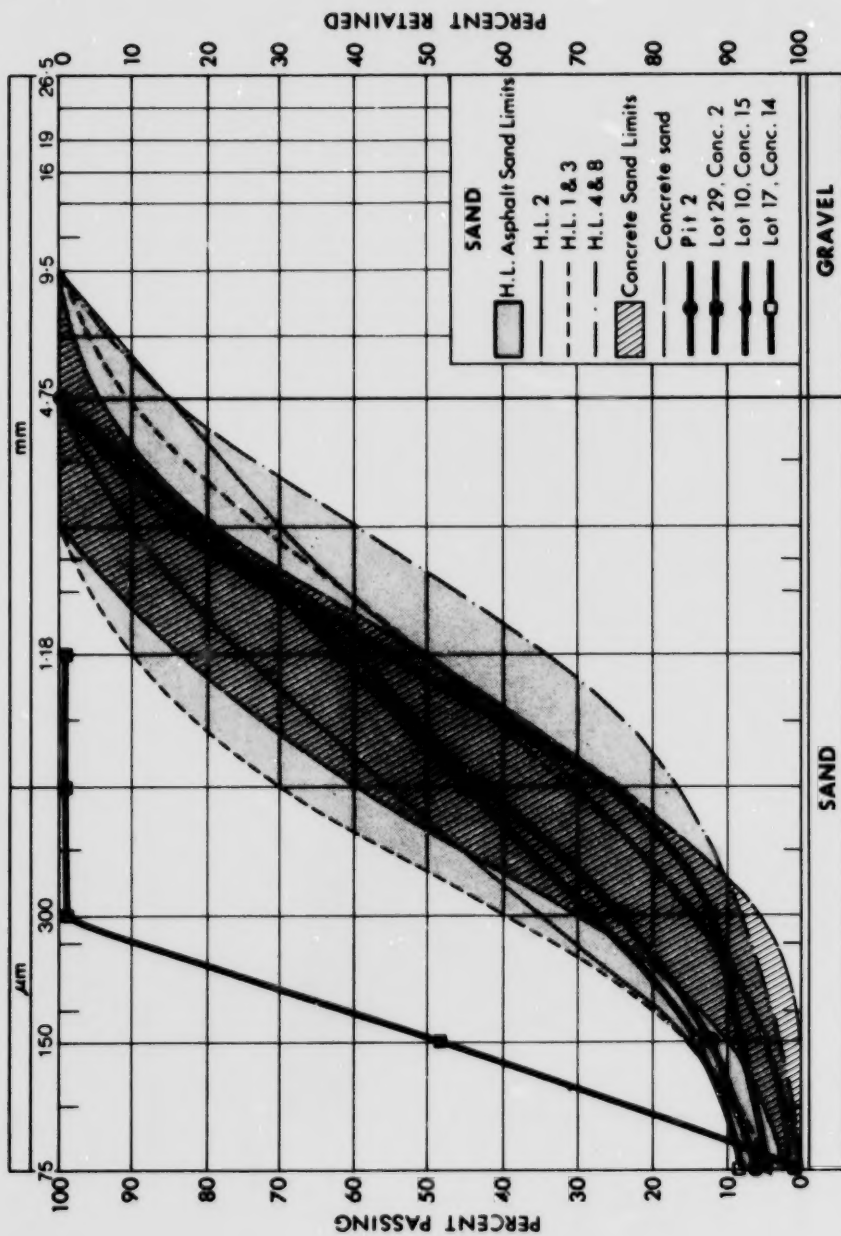


FIGURE 3b: AGGREGATE GRADING CURVES, KEPPEEL TOWNSHIP;

Based on analysis of the sand fraction of the aggregate contained in unprocessed samples (gradation envelopes adapted from M.T.C. Forms 1002, 1979 and 1003, 1981).

NOTE:

Information portrayed by grading curves refers strictly to a specific sample taken at the time of field investigation. Due to the inherent variability of sand and gravel deposits care should be exercised in extrapolating such information to the rest of the deposit.

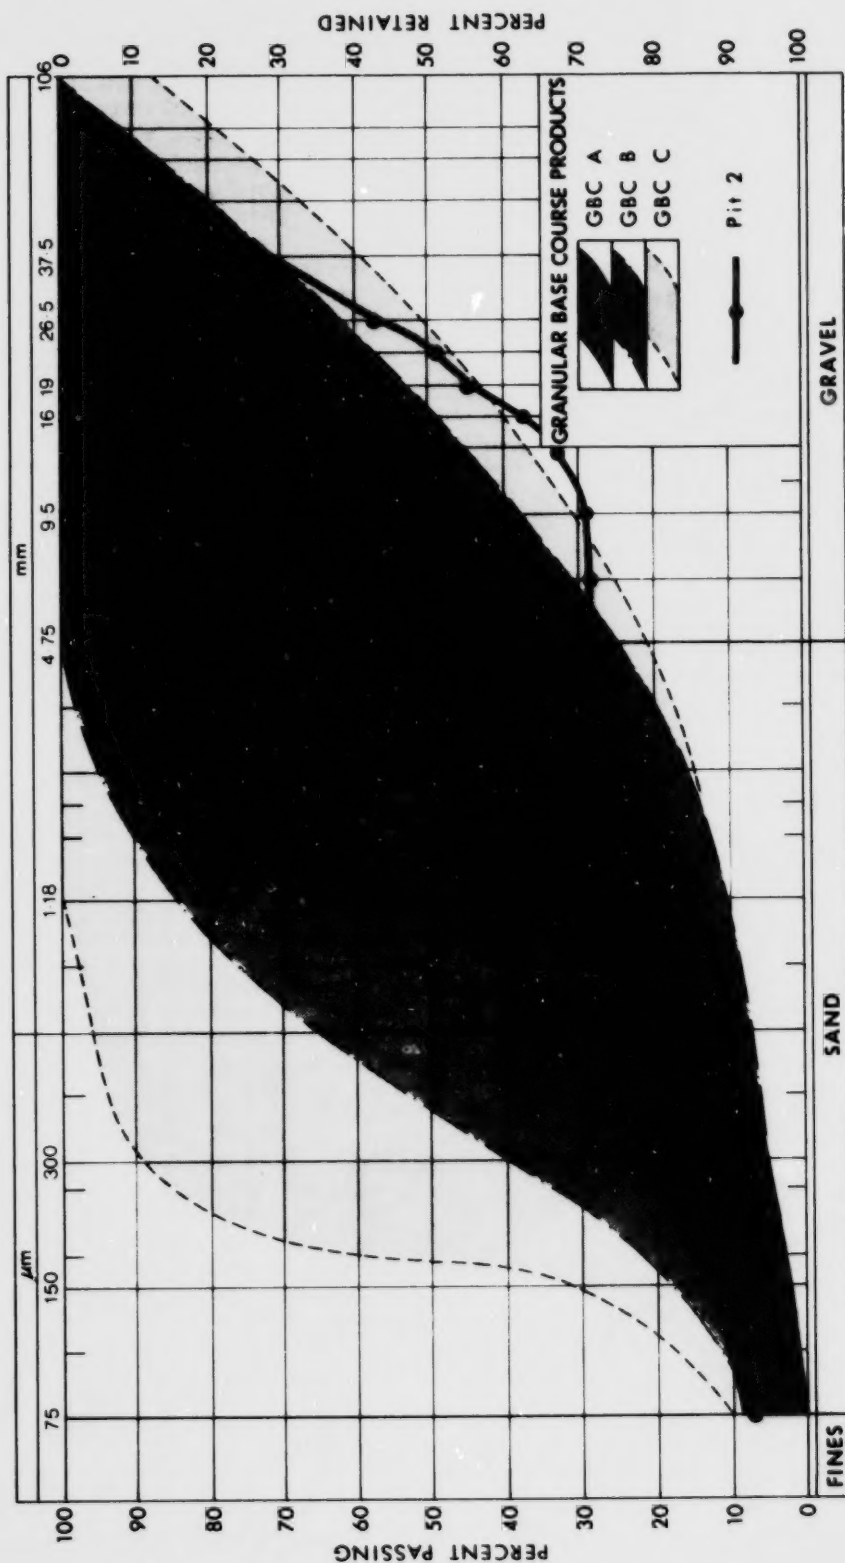


FIGURE 4a. AGGREGATE GRADING CURVES, SARAWAK TOWNSHIP;

Based on analysis of the total aggregate contained in unprocessed samples (gradation envelopes adapted from M.T.C. Form 1010, 1980).

NOTE: Information portrayed by grading curves refers strictly to a specific sample taken at the time of field investigation. Due to the inherent variability of sand and gravel deposits care should be exercised in extrapolating such information to the rest of the deposit.

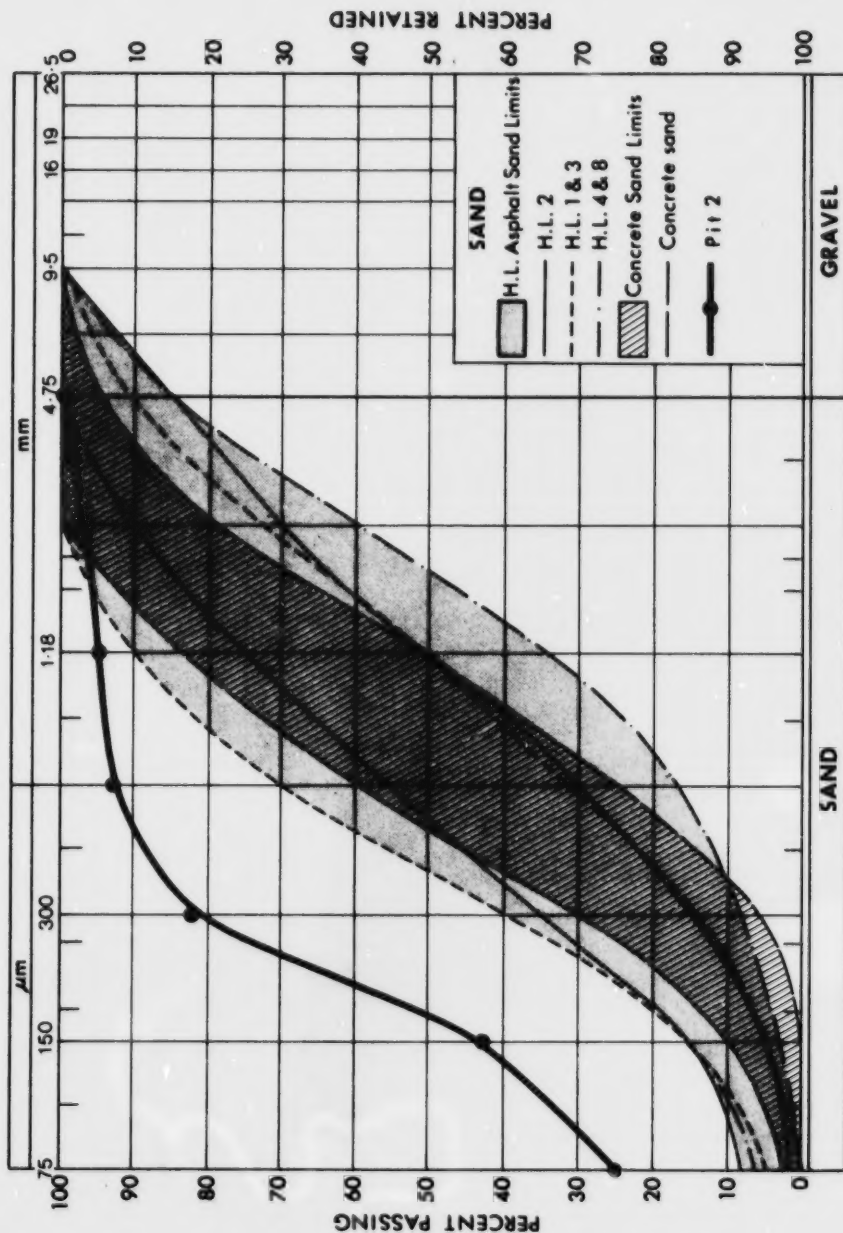


FIGURE 4b: AGGREGATE GRADING CURVES, SARAWAK TOWNSHIP;

Based on analysis of the sand fraction of the aggregate contained in unprocessed samples (gradation envelopes adapted from M.T.C. Forms 1002, 1979 and 1003, 1981).

NOTE:

Information portrayed by grading curves refers strictly to a specific sample taken at the time of field investigation. Due to the inherent variability of sand and gravel deposits care should be exercised in extrapolating such information to the rest of the deposit.

References

- Association of Professional Engineers of Ontario
1976: Performance Standards for Professional Engineers Advising on and Reporting on Oil, Gas and Mineral Properties; Association of Professional Engineers of Ontario, 11 p.
- Chapman, L.J. and Putnam, D.F.
1966: The Physiography of Southern Ontario; Second Edition, Ontario Research Foundation, University of Toronto Press, 386 p.
- Deike, W.
1982: Aggregate Suitability Evaluation, Townships of Keppel and Sarawak, Grey County; Aggregate Sources Research, Report No. 19, 38 p., unpublished report.
- Feenstra, B.H.
in prep: Quaternary Geology of the Markdale and Owen Sound Areas; Ontario Geological Survey, report and maps in preparation.
- Goudge, M.F.
1938: Limestones of Canada, Their Occurrence and Characteristics, Part IV, Ontario; Canada Department of Mines and Resources, Bureau of Mines Bulletin No. 781, 362 p.
- Guillet, G.R.
1967: The Clay Products Industry of Ontario; Ontario Department of Mines, Industrial Mineral Report 22, 206 p. Accompanied by Maps 2130 and 2131, scale 1:1 013 760.
1977: Clay and Shale Deposits of Ontario; Ontario Geological Survey, Mineral Deposits Circular 15, 117 p. Accompanied by Map 2358, scale 1:2 000 000.
- Hewitt, D.F.
1960: The Limestone Industries of Ontario; Ontario Department of Mines, Industrial Mineral Circular 5, 177 p.
- Liberty, B.A.
1966: Geology of the Bruce Peninsula, Ontario; Geological Survey of Canada, Department of Energy, Mines and Resources, Paper 65-41, 8 p. Accompanied by 13 maps, scale 1:63 360.
- Liberty, B.A. and Bolton, T.E.
1971: Paleozoic Geology of the Bruce Peninsula Area, Ontario; Geological Survey of Canada, Memoir 360, 163 p. Accompanied by Map 1194A, scale 1:253 440.
- Ontario
1983: Pits and Quarries Control Act; Revised Statutes of Ontario, 1980, Chapter 378, Queen's Printer for Ontario.
- Ontario Interministerial Committee on National Standards and Specifications (Metric Committee)
1975: Metric Practice Guide; 67 p.
- Ontario Ministry of Municipal Affairs and Housing
1983: Municipal Directory 1983; Queen's Printer for Ontario, 241 p.
- Ontario Ministry of Natural Resources
1983: Statistics 1983; Ontario Ministry of Natural Resources, 123 p.
- Ontario Ministry of Treasury, Economics and Intergovernmental Affairs
1974: 1974 Municipal Directory; Queen's Printer for Ontario, 128 p.
1976: Ontario's Changing Population, Volume II, Directions and Impact on Future Change 1971-2001; Regional Planning Branch, 184 p.
- Robertson, J.A.
1975: Mineral Deposit Studies, Mineral Potential Evaluation, and Regional Planning in Ontario; Ontario Division of Mines, Miscellaneous Paper 61, 42 p.
- Sharpe, D.R.
1976: Quaternary Geology of the Chesley-Tiverton Area, Bruce County; pp. 141-142 in Summary of Field Work, 1976, by the Geological Branch, edited by V.G. Milne, W.R. Cowan, K.D. Card, and J.A. Robertson, Ontario Division of Mines, Miscellaneous Paper 67, 183 p.
1977: Quaternary Geology of the Chesley-Tiverton (41 A/5, A/6) and Wiarton (41 A/11) Areas, Bruce and Grey Counties; pp. 146-148 in Summary of Field Work, 1977, by the Geological Branch, edited by V.G. Milne, O.L. White, R.B. Barlow, and J.A. Robertson, Ontario Geological Survey, Miscellaneous Paper 75, 208 p.
1982a: Drift Thickness of the Wiarton Area, Southern Ontario; Ontario Geological Survey, Map P.2560, Drift Thickness Series, scale 1:50 000.
1982b: Bedrock Topography of the Wiarton Area, Southern Ontario; Ontario Geological Survey, Map P.2561, Bedrock Topography Series, scale 1:50 000.
- Sharpe, D.R. and Jamieson, G.R.
1982: Quaternary Geology of the Wiarton Area, Southern Ontario; Ontario Geological Survey, Map P.2559, Geological Series, Preliminary Map, scale 1:50 000.
- Telford, P.G. and Narain, M.
1980: Industrial Mineral Resources Inventory of the Niagara Escarpment Planning Area; Ontario Geological Survey, Open File Report 5313, 310 p., 18 tables, 1 figure, Map P.1235 in back pocket and 55 accompanying maps.
- Vos, M.A.
1969: Stone Resources of the Niagara Escarpment; Ontario Department of Mines, Industrial Mineral Report 31, 68 p.
1975: Potential Clay and Shale Resources of Central Ontario; Ontario Division of Mines, Open File Report 5133, 40 p.
- Wilson, H.S.
1963: Lightweight Concrete Aggregates from Clays and Shales in Ontario; Department of Mines and Technical Surveys, Ottawa, Mines Branch, Technical Bulletin, TB 51, 47 p.

Appendix A — Suggested Additional Reading

- American Geological Institute
1972: Glossary of Geology; Washington, D.C., 858 p.
- Bauer, A.M.
1970: A Guide to Site Development and Rehabilitation of Pits and Quarries; Ontario Department of Mines, Industrial Mineral Report 33, 62 p.
- Cowan, W.R.
1977: Toward the Inventory of Ontario's Mineral Aggregates; Ontario Geological Survey, Miscellaneous Paper 73, 19 p.
- Fairbridge, R.W. (ed.)
1968: The Encyclopedia of Geomorphology; Encyclopedia of Earth Sciences, Vol. III, Reinhold Book Corp., N.Y., 1295 p.
- Flint, R.F.
1971: Glacial and Quaternary Geology; John Wiley and Sons Inc., 892 p.
- Hewitt, D.F.
1960: The Limestone Industries of Ontario; Ontario Department of Mines, Industrial Mineral Circular 5, 177 p.
1964a: Building Stones of Ontario, Part I Introduction; Ontario Department of Mines, Industrial Mineral Report 14, 43 p.
1964b: Building Stones of Ontario, Part II Limestone; Ontario Department of Mines, Industrial Mineral Report 15, 43 p.
1964c: Building Stones of Ontario, Part III Marble; Ontario Department of Mines, Industrial Mineral Report 16, 89 p.
1964d: Building Stones of Ontario, Part IV Sandstone; Ontario Department of Mines, Industrial Mineral Report 17, 57 p.
1972: Paleozoic Geology of Southern Ontario; Ontario Division of Mines, Geological Report 105, 18 p.
- Hewitt, D.F. and Karrow, P.F.
1963: Sand and Gravel in Southern Ontario; Ontario Department of Mines, Industrial Mineral Report 11, 151 p.
- Hewitt, D.F. and Vos, M.A.
1970: Urbanization and Rehabilitation of Pits and Quarries; Ontario Department of Mines, Industrial Mineral Report 34, 21 p.
- Lowe, S.B.
1980: Trees and Shrubs for the Improvement and Rehabilitation of Pits and Quarries in Ontario; Ontario Ministry of Natural Resources, 71 p.
- McLellan, A.G., Yundt, S.E. and Dorfman, M.L.
1979: Abandoned Pits and Quarries in Ontario; Ontario Geological Survey, Miscellaneous Paper 79, 36 p.
- Ontario Mineral Aggregate Working Party
1977: A Policy for Mineral Aggregate Resource Management in Ontario; Ontario Ministry of Natural Resources, 232 p.
- Ontario Ministry of Natural Resources
1975: Vegetation for the Rehabilitation of Pits and Quarries; Forest Management Branch, Division of Forests, 38 p.
- Peat, Marwick and Partners and M.M. Dillon Limited
1981: Mineral Aggregate Transportation Study; Industrial Mineral Background Paper 1, 133 p. Summary Report 26 p.
- Proctor and Redfern Limited
1974: Mineral Aggregate Study, Central Ontario Planning Region; Prepared for the Ontario Ministry of Natural Resources, over 100 p.
- Proctor and Redfern Limited and Gartner Lee Associates Limited
1975: Mineral Aggregate Study of Part of the Eastern Ontario Region; Prepared for the Ontario Ministry of Natural Resources, about 200 p.
1977: Mineral Aggregate Study and Geological Inventory, Southwestern Region of Ontario; Prepared for the Ontario Ministry of Natural Resources, about 200 p.

Appendix B — Glossary

Abrasion resistance: Tests such as the Los Angeles abrasion test are used to measure the ability of aggregate to resist crushing and pulverizing under conditions similar to those encountered in processing and use. Measuring resistance is an important component in the evaluation of the quality and prospective uses of aggregate. Hard, durable material is preferred for road building.

Absorption capacity: Related to the porosity of the rock types of which an aggregate is composed. Porous rocks are subject to disintegration when absorbed liquids freeze and thaw, thus decreasing the strength of the aggregate.

Aggregate: Any hard, inert, construction material (sand, gravel, shells, slag, crushed stone or other mineral material) used for mixing in various-sized fragments with a cement or bituminous material to form concrete, mortar, etc., or used alone for road building or other construction. Synonyms include mineral aggregate and granular material.

Alkali-aggregate reaction: A chemical reaction between the alkalis of portland cement and certain minerals found in rocks used for aggregate. Alkali-aggregate reactions are undesirable because they can cause expansion and cracking of concrete. Although perfectly suitable for building stone and asphalt applications, alkali-reactive aggregates should be avoided for structural concrete uses.

Blending: Required in cases of extreme coarseness, fineness, or other irregularities in the gradation of unprocessed aggregate. Blending is done with approved sand-sized aggregate in order to satisfy the gradation requirements of the material.

Cambrian: The first period of the Paleozoic Era, thought to have covered the time between 570 and 500 million years ago. The Cambrian precedes the Ordovician Period.

Clast: An individual constituent, grain or fragment of a sediment or rock, produced by the mechanical weathering of larger rock mass. Synonyms include particle and fragment.

Crushable aggregate: Unprocessed gravel containing a minimum of 35 percent coarse aggregate larger than the No. 4 sieve (4.75 mm) as well as a minimum of 20 percent greater than the 26.5 mm sieve.

Deleterious lithology: A general term used to designate those rock types which are chemically or physically unsuited for use as construction or road-building aggregates. Such lithologies as chert, shale, siltstone and sandstone may deteriorate rapidly when exposed to traffic and other environmental conditions.

Devonian: A period of the Paleozoic Era thought to have covered the span of time between 395 and 345 million years ago, following the Silurian Period. Rocks formed in the Devonian Period are among the youngest found in Ontario.

Dolostone: A carbonate sedimentary rock consisting chiefly of the mineral dolomite and containing relatively little calcite (dolostone is also known as dolomite).

Drift: A general term for all unconsolidated rock debris transported from one place and deposited in another, distinguished from underlying bedrock. In North America, glacial activity has been the dominant mode of transport and deposition of drift. Synonyms include overburden and surficial deposit.

Drumlin: A low, smoothly rounded, elongated hill, mound, or ridge composed of glacial materials. These landforms were formed beneath an advancing ice sheet, and were shaped by its flow.

Eolian: Pertaining to the wind, especially with respect to landforms whose constituents were transported and deposited by wind activity. Sand dunes are an example of an eolian landform.

Fines: A general term used to describe the size fraction of an aggregate which passes (is finer than) the No. 200 mesh screen (0.075 mm). Also described informally as "dirt", these particles are in the silt and clay size range.

Glacial lobe: A tongue-like projection from the margin of the main mass of an ice cap or ice sheet. During the Pleistocene Epoch several lobes of the Laurentide continental ice sheet occupied the Great Lakes basins. These lobes advanced then melted back numerous times during the Pleistocene, producing the complex arrangement of glacial material and landforms found in southern Ontario.

Gradation: The proportion of material of each particle size, or the frequency distribution of the various sizes which constitute a sediment. The strength, durability, permeability and stability of an aggregate depend to a great extent on its gradation. The size limits for different particles are as follows:

Boulder	more than 200 mm
Cobbles	75-200 mm
Coarse Gravel	26.5-75 mm
Fine Gravel	4.75-26.5 mm
Coarse Sand	2-4.75 mm
Medium Sand	0.425-2 mm
Fine Sand	0.075-0.425 mm
Silt, Clay	less than 0.075 mm

Granular base course: Components of the pavement structure of a road, which are placed on the subgrade and are designed to provide strength, stability and drainage, as well as support for surfacing materials. Several types have been defined: Granular Base Course A consists of crushed and processed aggregate and has relatively stringent quality standards in comparison to Granular Base Course B and C which are usually pit-run or other unprocessed aggregate.

AGGREGATE RESOURCES INVENTORY

Hot-laid (or asphaltic) aggregate: Bituminous, cemented aggregates used in the construction of pavements either as surface or bearing course (H.L. 1, 3 and 4), or as binder course (H.L. 2 and 8) used to bind the surface course to the underlying granular base course.

Lithology: The description of rocks on the basis of such characteristics as color, structure, mineralogic composition and grain size. Generally, the description of the physical character of a rock.

Magnesium sulphate soundness test: This test is designed to simulate the action of freezing and thawing on aggregates. Those aggregates which are susceptible will usually break down and give high losses in this test.

Meltwater channel: A drainage way, often terraced, produced by water flowing away from a melting glacier margin.

Ordovician: an early period of the Paleozoic Era thought to have covered the span of time between 500 and 435 million years ago.

Paleozoic Era: One of the major divisions of the geologic time scale thought to have covered the time between 570 and 230 million years ago, the Paleozoic Era (or Ancient Life Era) is subdivided into six geologic periods, of which only four (Cambrian, Ordovician, Silurian and Devonian) can be recognized in southern Ontario.

Petrographic examination: An aggregate quality test based on known field performance of various rock types. The test result is a Petrographic Number (P.N.). The higher the P.N. the lower the quality of the aggregate.

Pleistocene: An epoch of the recent geological past including the time from approximately 2 million years ago to 7000 years ago. Much of the Pleistocene was characterized by extensive glacial activity and is popularly referred to as the "Great Ice Age".

Possible resource: Reserve estimates based largely on broad knowledge of the geological character of the deposit and for which there are few, if any, samples or measurements. The estimates are based on assumed continuity or repetition for which there are reasonable geological indications.

Shale: A fine-grained, sedimentary rock formed by the consolidation of clay, silt or mud and characterized by well developed bedding planes, along which the rock breaks readily into thin layers. The term shale is also commonly used for fissile claystone, siltstone and mudstone.

Silurian: An early period of the Paleozoic Era thought to have covered the time between 435 and 395 million years ago. The Silurian follows the Ordovician Period and precedes the Devonian Period.

Soundness: The ability of the components of an aggregate to withstand the effects of various weathering processes and agents. Unsound lithologies are subject to disintegration caused by the expansion of absorbed solutions. This may seriously impair the performance of road-building and construction aggregates.

Till: Unsorted and unstratified rock debris, deposited directly by glaciers, and ranging in size from clay to large boulders.

Wisconsinan: Pertaining to the last glacial period of the Pleistocene Epoch in North America. The Wisconsinan began approximately 100 000 years ago and ended approximately 7000 years ago. The glacial deposits and landforms of southern Ontario are predominantly the result of glacial activity during the Wisconsinan Stage.

Appendix C — Geology of Sand and Gravel Deposits

The type, distribution, and extent of sand and gravel deposits in southern Ontario are the result of extensive glacial and glacially influenced activity in Wisconsin time during the Pleistocene Epoch, approximately 100 000 to 7000 years ago. The deposit types reflect the different depositional environments that existed during the melting and retreat of the continental ice masses, and can readily be differentiated on the basis of their morphology, structure, and texture. The deposit types are described below.

GLACIOFLUVIAL DEPOSITS

These deposits can be divided into two broad categories: those that were formed in contact with (or in close proximity to) glacial ice, and those that were deposited by meltwaters carrying materials beyond the ice margin.

Ice-Contact Terraces (ICT): These are glaciofluvial features deposited between the glacial margin and a confining topographic high, such as the side of a valley. The structure of the deposits may be similar to that of outwash deposits, but in most cases the sorting and grading of the material is more variable and the bedding is discontinuous because of extensive slumping. The probability of locating large amounts of crushable aggregate is moderate, and extraction may be expensive because of the variability of the deposits both in terms of quality and grain size distribution.

Kames (K): Kames are defined as mounds of poorly sorted sand and gravel deposited by meltwater in depressions or fissures on the ice surface or at its margin. During glacial retreat, the melting of supporting ice causes collapse of the deposits, producing internal structures characterized by bedding discontinuities. The deposits consist mainly of irregularly bedded and crossbedded, poorly sorted sand and gravel. The present forms of the deposits include single mounds, linear ridges (crevasse fillings) or complex groups of landforms. The latter are occasionally described as "undifferentiated ice-contact stratified drift" (IC) when detailed subsurface information is unavailable. Since kames commonly contain large amounts of fine-grained material and are characterized by considerable variability, there is generally a low to moderate probability of discovering large amounts of good quality, crushable aggregate. Extractive problems encountered in these deposits are mainly the excessive variability of the aggregate and the rare presence of excess fines (silt- and clay-sized particles).

Eskers (E): Eskers are narrow, sinuous ridges of sand and gravel deposited by meltwaters flowing in tunnels within or at the base of glaciers, or in channels on the ice surface. Eskers vary greatly in size. Many, though not all eskers consist of a central core of poorly sorted and stratified gravel characterized by a wide range in grain size. The core material is often draped on its flanks by better sorted and stratified gravel characterized by a wide range in grain size. The core material is often draped on its flanks by better sorted and stratified sand and gravel. The deposits have a high probability of containing a large proportion of crushable aggregate, and since they are

generally built above the surrounding ground surface, are convenient extraction sites. For these reasons esker deposits have been traditional aggregate sources throughout Ontario, and are significant components of the total resources of many areas.

Some planning constraints and opportunities are inherent in the nature of the deposits. Because of their linear nature, the deposits commonly extend across several property boundaries leading to unorganized extractive development at numerous small pits. On the other hand, because of their form, eskers can be easily and inexpensively extracted and are amenable to rehabilitation and sequential land use.

Undifferentiated Ice-Contact Stratified Drift (IC):

This designation may include deposits from several ice-contact, depositional environments which usually form extensive, complex landforms. It is not feasible to identify individual areas of coarse-grained material within such deposits because of their lack of continuity and grain size variability. They are given a qualitative rating based on existing pit and other subsurface data.

Outwash (OW): Outwash deposits consist of sand and gravel laid down by meltwaters beyond the margin of the ice lobes. The deposits occur as sheets or as terraced valley fills (valley trains) and may be very large in extent and thickness. Well developed outwash deposits have good horizontal bedding and are uniform in grain size distribution. Outwash deposited near the glacier's margin is much more variable in texture and structure. The probability of locating useful crushable aggregates in outwash deposits is moderate to high depending on how much information on size, distribution and thickness is available.

Alluvium (AL): Alluvium is a general term for clay, silt, sand, gravel, or similar unconsolidated material deposited during postglacial time by a stream as sorted or semi-sorted sediment, on its bed or on its floodplain. The probability of locating large amounts of crushable aggregate in alluvial deposits is low, and they have generally low value because of the presence of excess silt- and clay-sized material. There are few large postglacial alluvium deposits in Ontario.

GLACIOLACUSTRINE DEPOSITS

Glaciolacustrine Beach Deposits (LB): These are relatively narrow, linear features formed by wave action at the shores of glacial lakes that existed at various times during the deglaciation of southern Ontario. Well developed lacustrine beaches are usually less than 20 feet (6 m) thick. The aggregate is well sorted and stratified and sand-sized material commonly predominates. The composition and size distribution of the deposit depends on the nature of the source material. The probability of obtaining crushable aggregate is high when the material is developed from coarse-grained materials such as a stony till, and low when developed from fine-grained materials. Beaches are relatively narrow, linear deposits, so that extractive operations are often numerous and extensive.

Glaciolacustrine Deltas (LD): These features were formed where streams or rivers of glacial meltwater flowed into lakes and deposited their suspended sediment. In southern Ontario such deposits tend to consist mainly of sand and abundant silt. However, in near-ice and ice-contact positions, coarse material may be present. Although deltaic deposits may be large, the probability of obtaining coarse material is generally low.

Glaciolacustrine Plains (LP): The nearly level surface marking the floor of an extinct glacial lake. The sediments which form the plain are predominantly fine to medium sand, silt, and clay, and were deposited in relatively deep water. Lacustrine deposits are generally of low value as aggregate sources because of their fine grain size and lack of crushable material. In some aggregate-poor areas, lacustrine deposits may constitute valuable sources of fill and some granular base course aggregate.

GLACIAL DEPOSITS

End Moraines (EM): These are belts of glacial drift deposited at, and parallel to, glacier margins. End moraines commonly consist of ice-contact stratified drift and in such instances are usually called kame

moraines. Kame moraines commonly result from deposition between two glacial lobes (interlobate moraines). The probability of locating aggregates within such features is moderate to low. Exploration and development costs are high. Moraines may be very large and contain vast aggregate resources, but the location of the best areas within the moraine is usually poorly defined.

EOLIAN DEPOSITS

Windblown Deposits (WD): Windblown deposits are those formed by the transport and deposition of sand by winds. The form of the deposits ranges from extensive, thin layers to well developed linear and crescentic ridges known as dunes. Most windblown deposits in southern Ontario are derived from, and deposited on, pre-existing lacustrine sand plain deposits. Windblown sediments almost always consist of fine to coarse sand and are usually well sorted. The probability of locating crushable aggregate in windblown deposits is very low.

Appendix D — Geology of Bedrock Deposits

BEDROCK SUITABLE FOR CRUSHED STONE PRODUCTS

Bass Islands Formation (Upper Silurian)

(Includes the Bertie Formation of the Niagara Peninsula) Composition: Medium- to massive-bedded, aphanitic, brown dolostone with shaly partings. Thickness: 35 to 60 feet (11 to 18 m) near Hagersville. Uses: Quarried for crushed stone on the Niagara Peninsula at Fort Erie, Cayuga, Hagersville, and Dunnville. Los Angeles Abrasion Test: 17-35% loss; Absorption: 1.4%. Shaly parts are unsuitable for aggregate because of high soundness losses.

Bobcaygeon Formation (Middle Ordovician)

Composition: Compact, homogeneous, medium- to thin-bedded, fine-grained limestone with some argillaceous and shaly partings. Thickness: The lower unit is 40 to 72 feet (12 to 22 m) thick in the east and the remainder of the formation is 40 feet (12 m). Uses: Quarried at Kirkfield and Marysville for crushed stone. The Bobcaygeon Formation has consistently acceptable quality for granular base course materials and concrete.

Bols Blanc Formation (Lower-Middle Devonian)

Composition: Brownish grey, medium-crystalline, medium- to thin-bedded, cherty limestone, commonly fossiliferous. Limestone may be silty or sandy in places. Thickness: 9 to 200 feet (3 to 61 m). Uses: Quarried at Hagersville, Cayuga, and Port Colborne for crushed stone. High cherty content makes much of the material unsuitable for concrete aggregate. Los

Angeles Abrasion Test: 14-28% loss; Soundness Test: 4-10% loss; Absorption: 0.7-2.0%.

Dundee Formation (Middle Devonian)

Composition: Fine- to medium-crystalline, brownish grey, medium- to thick-bedded, dolomitic limestone with shaly partings, sandy layers, and chert in some areas. Thickness: 60 to 160 feet (18 to 49 m). Uses: Quarried near Port Dover and Pelee Island for crushed stone. Used at St. Marys as raw material for portland cement. Los Angeles Abrasion Test: 22-32% loss; Absorption: 0-4%.

Gull River Formation (Middle Ordovician)

Composition: Member A: thin- to thick-bedded, interbedded, grey argillaceous limestone and buff to green dolostone with a maximum thickness of 60 feet (18 m). Members B and C are dense, aphanitic limestones with argillaceous dolostone interbeds. Uses: Quarried at Kirkfield and Uthoff for crushed stone. The product is generally fresh and compact with good cubic-shaped factor, low clay content, low absorption, and low soundness losses. Smooth particle surfaces may cause adhesion problems for asphalt. There is some alkali reactivity in a few of the layers.

Lockport and Amabel Formations (Middle Silurian)

Composition: Amabel Formation (Waterdown to the Bruce Peninsula): massive, fine-crystalline dolostone, with reef facies dolostone near Georgetown. Lockport Formation (lateral facies equivalent to the Amabel Formation from Waterdown to Niagara Falls): thin- to massive-bedded, fine- to medium-grained dolostone. Thickness: Amabel Formation: maximum observed

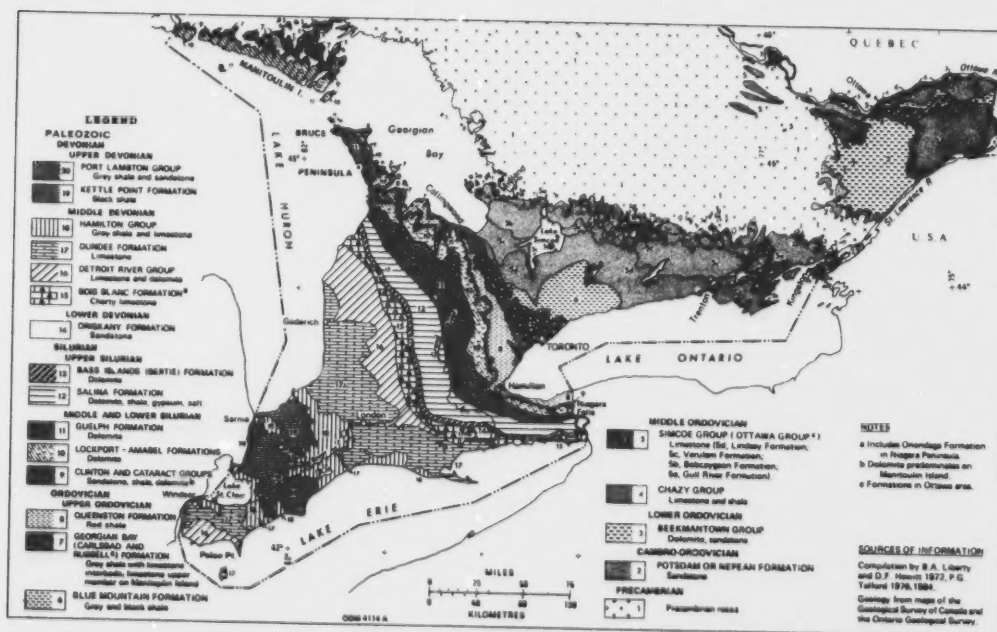


Figure 5. Bedrock Geology of Southern Ontario.

thickness of 84 feet (26 m). Lockport Formation: up to 130 feet (40 m). Uses: The Lockport and Amabel Formations have been used to produce lime, crushed stone, concrete aggregate and building stone throughout their area of occurrence, and are a resource of provincial significance. Los Angeles Abrasion Test: 21-35% loss; Soundness Test: 2.0% loss; Absorption: 0.4-1.6%.

Onondaga Formation (Middle Devonian)

(Equivalent to the Detroit River Group, with a textural change) Composition: Edgecliff Member: medium-bedded, fine- to medium-grained, dark grey cherty limestone with an estimated thickness of 25 to 30 feet (8 to 9 m). Clarence Member: massive-bedded, dark grey-brown, fine-grained, very cherty limestone having estimated thickness of 26 feet (8 m). Moorehouse Member: medium-bedded, dark grey-brown or purplish brown, fine- to coarse-grained, variably cherty limestone with an estimated thickness of 15 to 25 feet (5 to 8 m). Uses: Quarried for crushed stone on the Niagara Peninsula at Welland and Port Colborne. High cherty content makes much of the material unsuitable for concrete aggregate.

Ottawa Formation (Middle Ordovician)

Composition: Lower Phase (Lowville and Pamela Beds): shale, some sandstone and dolostone. Thickness: 100 feet (30 m). Middle Phase (Hull, Rockland, and Leray Beds): pure, thick-bedded, crystalline limestone. Thickness: 150 feet (46 m) near Ottawa. Upper Phase (Cobourg and Sherman Fall Beds): pure and impure crystalline limestone with few to numerous shaly partings, 450 to 475 feet (137 to 145 m) thick near Ottawa. Uses: The Leray, Rockland, and Hull Beds have been quarried extensively for crushed stone and for building stone. In addition, the Hull Beds are an excellent source of limestone for cement production and agricultural uses.

Oxford Formation (Lower Ordovician)

Composition: Medium- to thick-bedded, grey dolostone, with some shaly partings. Thickness: 240 feet (73 m). Uses: Quarried for crushed stone (road and concrete aggregate) at Ottawa, Brockville, and Smiths Falls.

BEDROCK SUITABLE FOR LIME PRODUCTION AND OTHER CHEMICAL USES

Detroit River Group (Middle Devonian)

(Equivalent to the Onondaga Formation in the Niagara Peninsula, with a textural change) Composition: Near Beachville, the group consists of medium- to micro-crystalline, medium-bedded, high-purity limestone. It grades northwards near St. Marys to soft, evenly bedded, fine-grained dolostone with bituminous laminae. Massive, porous, reef facies material also occurs to the north (Formosa Reef Limestone). Thickness: 100 feet (30 m) at Beachville, 350 feet (107 m) at Clinton. Uses: The most important source of high-purity limestone in Ontario is the Lucas Formation of the Detroit River Group at Beachville. Detroit River limestone produces much of Ontario's lime and ce-

ment. The Anderdon Member of the Lucas Formation is quarried at Amherstburg for crushed stone.

Grenville Marble (Precambrian)

Composition: Recrystallized fine- to coarse-grained white limestone and dolostone, usually of high chemical purity. Uses: Lime production, but also in small amounts for terrazzo chips, poultry grit, decorative stone, and building stone.

Guelph Formation (Middle Silurian)

Composition: Aphanitic to medium-crystalline, thick-bedded, soft, porous dolostone, characterized in places by extensive vuggy, porous reefal facies dolostone of high chemical purity. Thickness: 100 to 170 feet (30 to 52 m). Uses: The main use is for dolomitic lime in the construction industry. The formation is quarried near Hamilton and Guelph.

Lindsay Formation (Upper Ordovician)

Composition: fine-crystalline, rubbly, nodular-weathering limestone. Collingwood Member: organic-rich interbedded calcareous shales and limestones. Uses: Quarried at Picton, Ogden Point and Bowmanville for cement. The formation is generally unsuitable for crushed stone, concrete aggregate, or granular base course.

Verulam Formation (Middle Ordovician)

Composition: Fossiliferous, pure to argillaceous limestone and interbedded calcareous shale. The rock is not resistant to erosion and commonly weathers to rubble. Thickness: 200 to 300 feet (61 to 91 m). Uses: Quarried at Picton, Ogden Point, and Mara Township for use in cement manufacture. The formation is unsuitable for crushed stone because of clay impurities, many clayey interbeds, and low abrasion resistance, high soundness losses and poor freeze and thaw resistance.

BEDROCK SUITABLE FOR BRICK AND TILE MANUFACTURE

Georgian Bay Formation (Upper Ordovician) (Formerly known as the Meaford-Dundas and Blue Mountain shales in the Toronto and Bruce Peninsula areas) Composition: Soft, fissile, blue-grey shale with limy or sandy lenses in a few places. Thickness: 640 feet (195 m) at Toronto. Uses: Several producers in the vicinity of Metro Toronto produce brick and structural tile. Lightweight aggregate has been produced at Streetsville by heat expansion of the shale.

Hamilton Group (Middle Devonian)

Composition: Grey shale with interbeds of crystalline and cherty limestone. The group has six formations, but only the Arkona Formation is of commercial value. It is a soft, light grey, calcareous shale which is plastic and easily worked when wet. Thickness: 80 to 300 feet (24 to 91 m). The Arkona Formation has a thickness of 14 to 121 feet (4 to 37 m). Uses: The Arkona Formation is extracted at Thedford and near Arkona for production of drainage tile.

Queenston Formation (Upper Ordovician)

Composition: Red, thin- to thick-bedded, sandy to argillaceous shale with green mottling and banding. Thickness: 400 to 500 feet (122 to 152 m). Uses: There are several large shale quarries developed in the Queenston Formation in the Toronto-Hamilton region and one at Russell, near Ottawa. All produce brick for construction. The Queenston Formation is the most important source material for brick manufacture in the Province.

BEDROCK SUITABLE FOR OTHER INDUSTRIAL PRODUCTS

Nepean (Potsdam) Formation (Cambro-Ordovician)

Composition: Creamy, coarse-grained, silica sandstone. Uses: Quarried throughout its area of outcrop

for building stone, decorative stone, abrasives, and for glass making.

Salina Formation (Upper Silurian)

Composition: Grey and red shale, brown dolomite, and, in places, salt, anhydrite, and gypsum. The formation consists predominantly of evaporite deposits with up to eight members identified. Uses: Gypsum is mined at Hagersville, Caledonia, and Drumbo. Salt is mined at Goderich and is produced from brine wells at Amherstburg, Windsor, and Sarnia.

Blue Mountain Formation (Upper Ordovician)

(Formerly known as the Whitby Formation) Composition: Blue-grey, predominantly non-calcareous shale. Uses: Quarried at Bowmanville for use in cement production.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.

Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.

Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.

Test hole data from Aggregate Assessment Office, Ontario Geological Survey, Ontario Ministry of Natural Resources.

Selected water well data from the Ontario Ministry of the Environment.

Drilling data from the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by: B. H. Feenstra, in prep.

D. R. Sharpe and G. R. Jamieson, 1982.

D. R. Sharpe, 1982a, b.

Additional Field Work by: Staff of the Aggregate Assessment Office.


Compilation and Drafting by: Staff of the Aggregate Assessment Office.


This map is to accompany O.G.S. Aggregate Resources Inventory Paper 119.

This map is published with the permission of V. G. Milne, Director, Ontario Geological Survey.

Issued 1985.

Information quoted for an individual test hole or pit refers to a specific sample or face. Care should be exercised in extrapolating such information to other parts of the deposit.

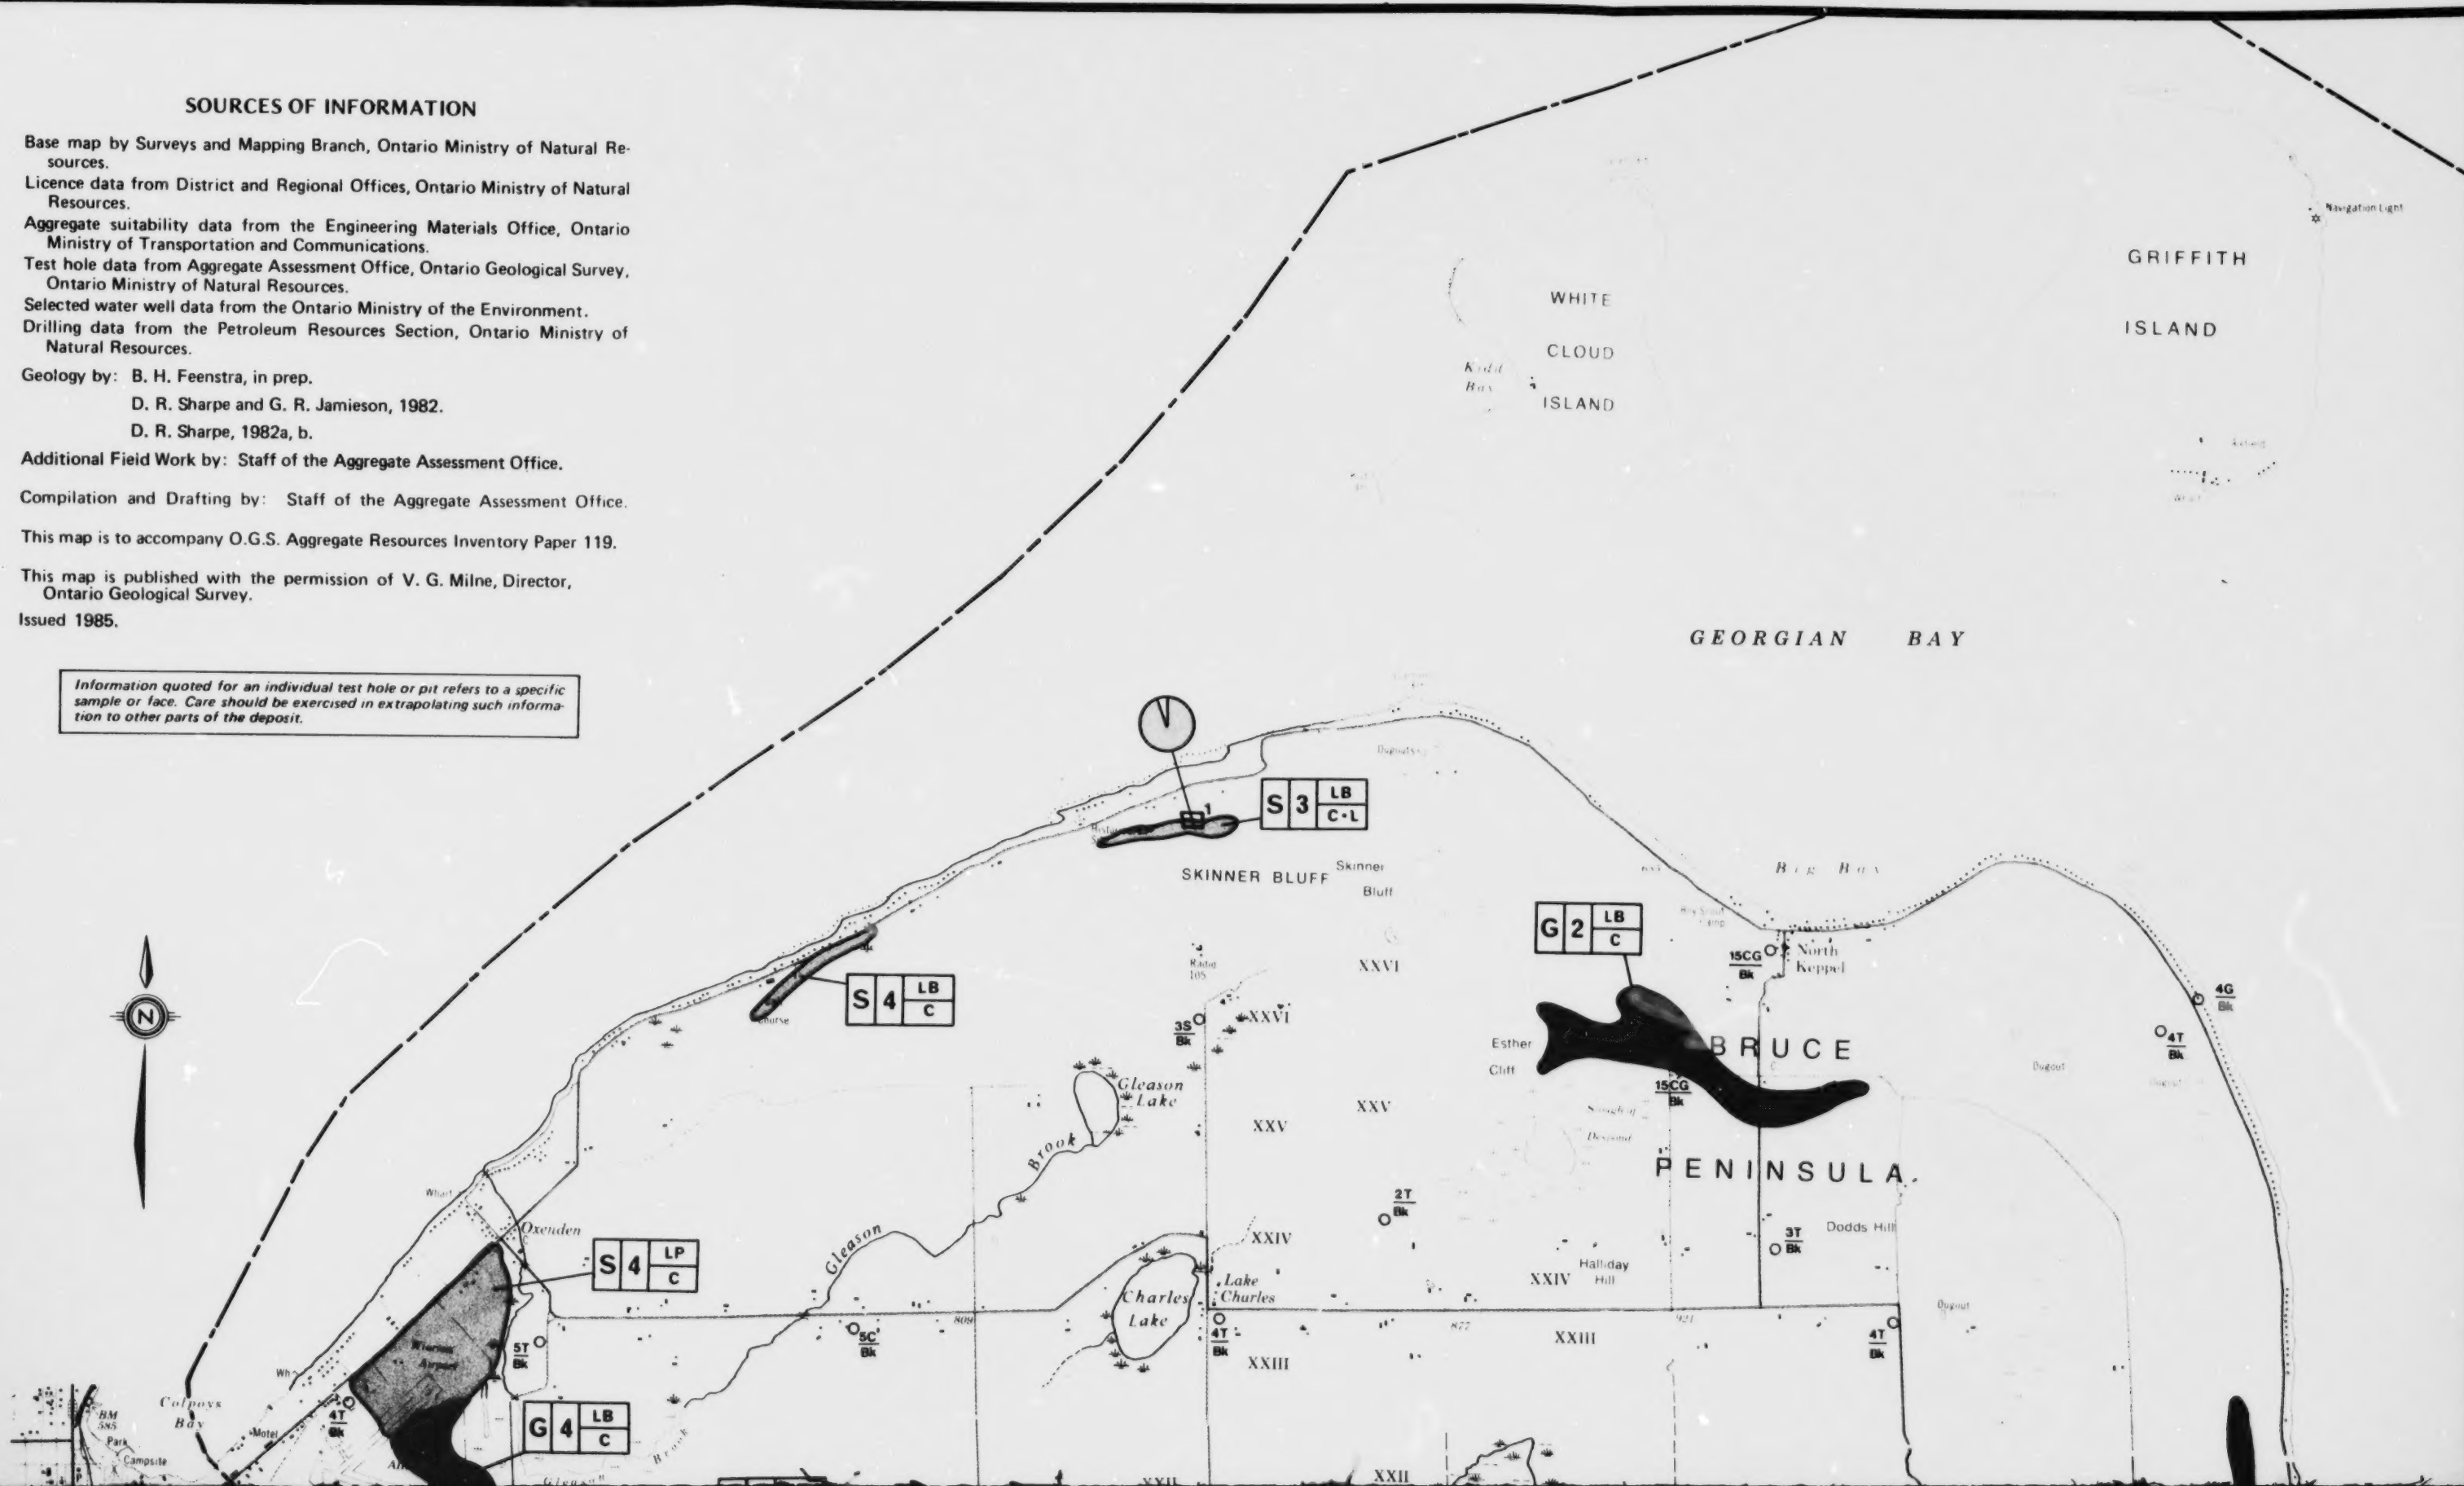

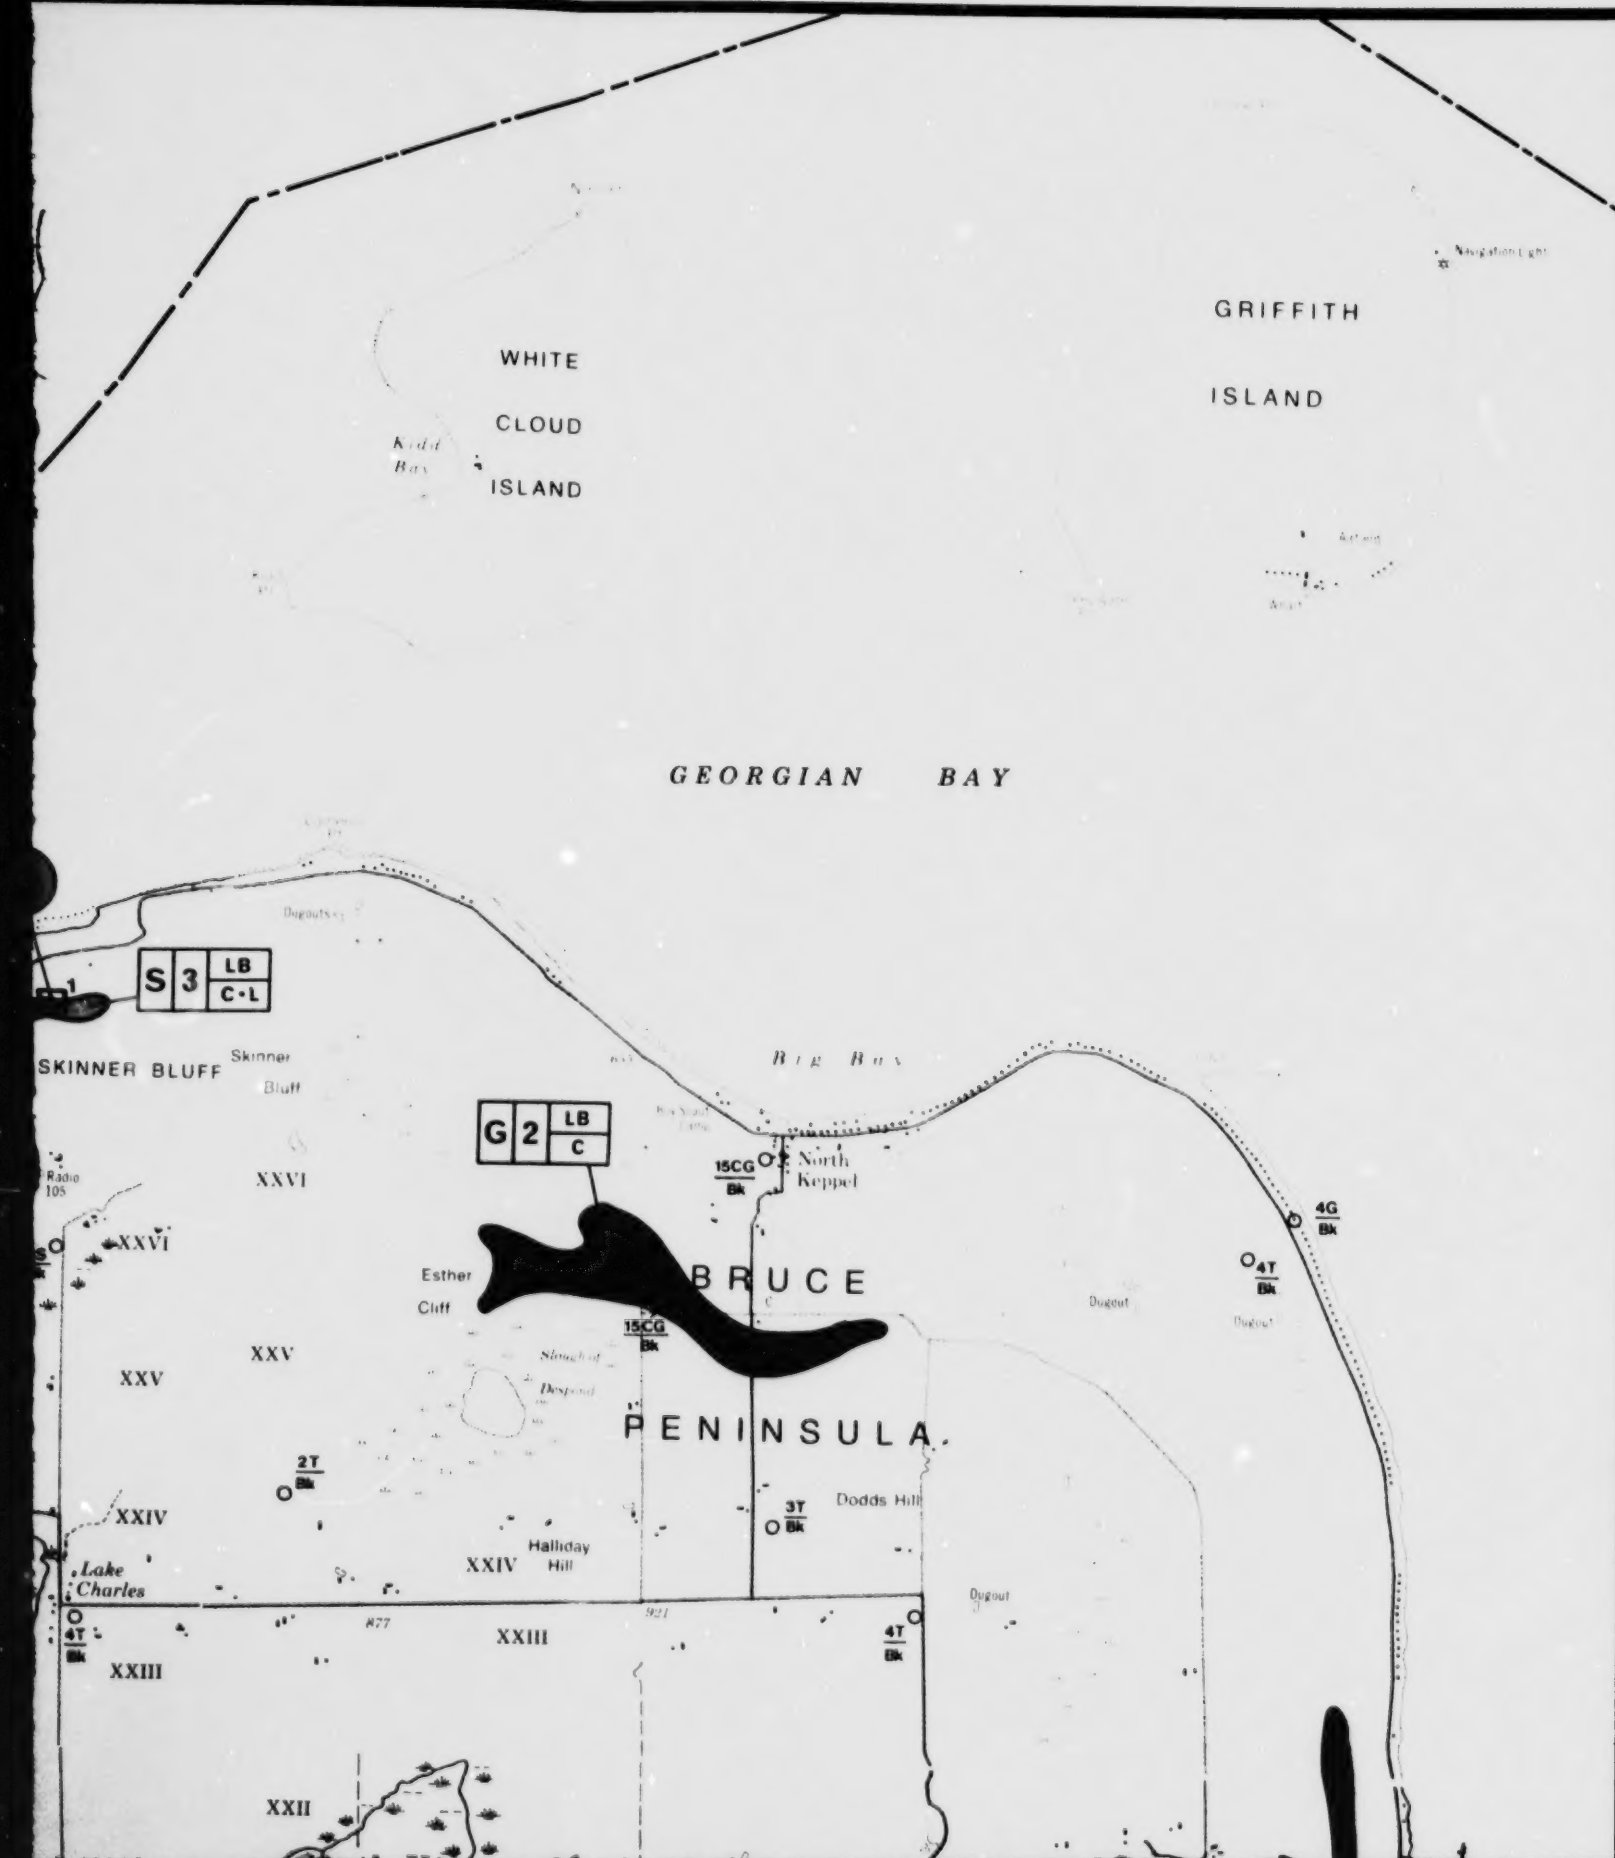

Ministry of
Natural
Resources

Hon. Michael Harris
Minister

Mary Mogford
Deputy Minister


Ontario

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

KEPPEL and SARAWAK TOWNSHIPS
GREY COUNTY


MAP 1
DISTRIBUTION OF SAND AND
GRAVEL DEPOSITS

Scale 1: 50 000



NTS Reference: 41 A/10, 41 A/11
41 A/14, 41 A/15

© OMNR-OGS 1985

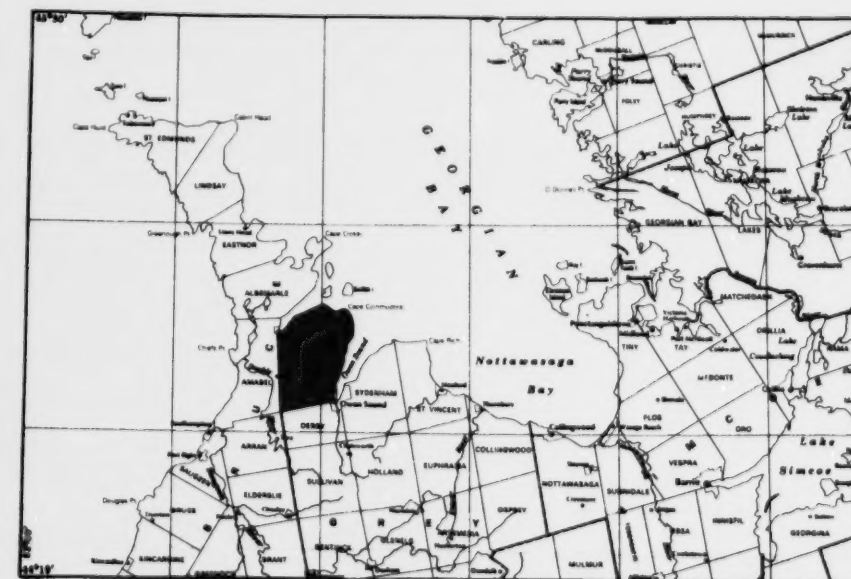

Location Map

Scale: 1:800,000


LEGEND


(Some map units and symbols may not apply to this map.)

MAP UNITS



Gravel deposit.

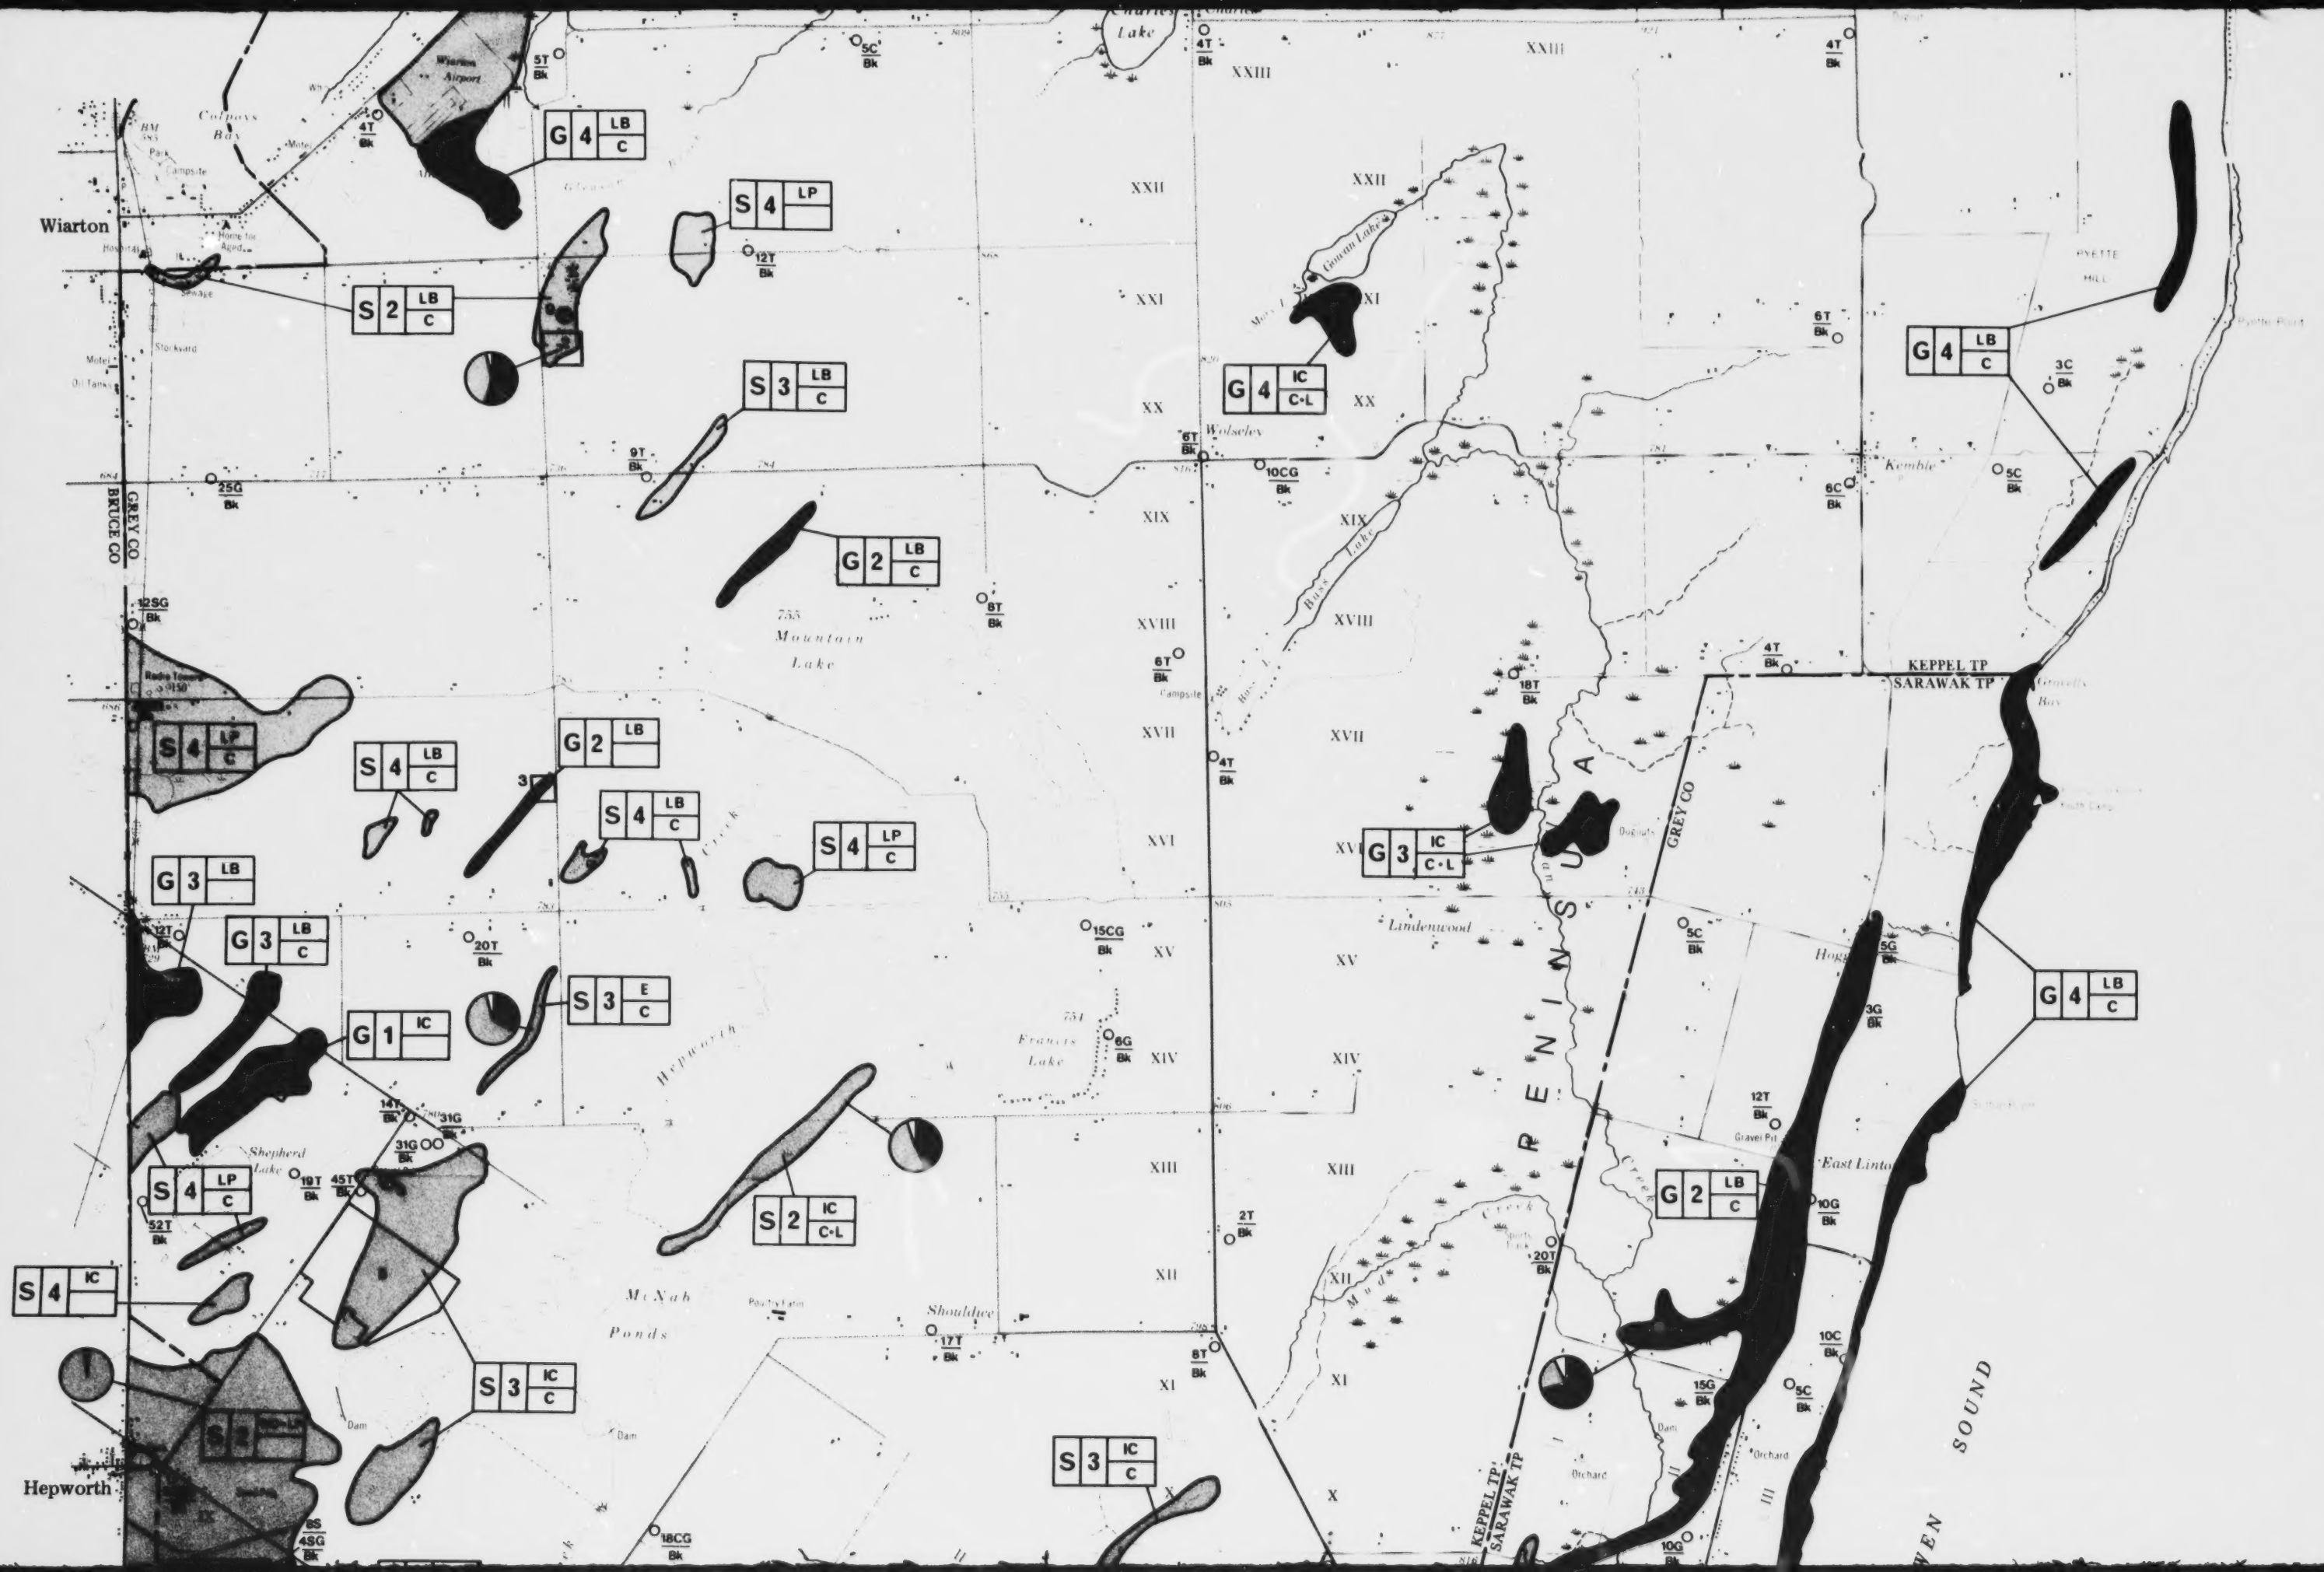

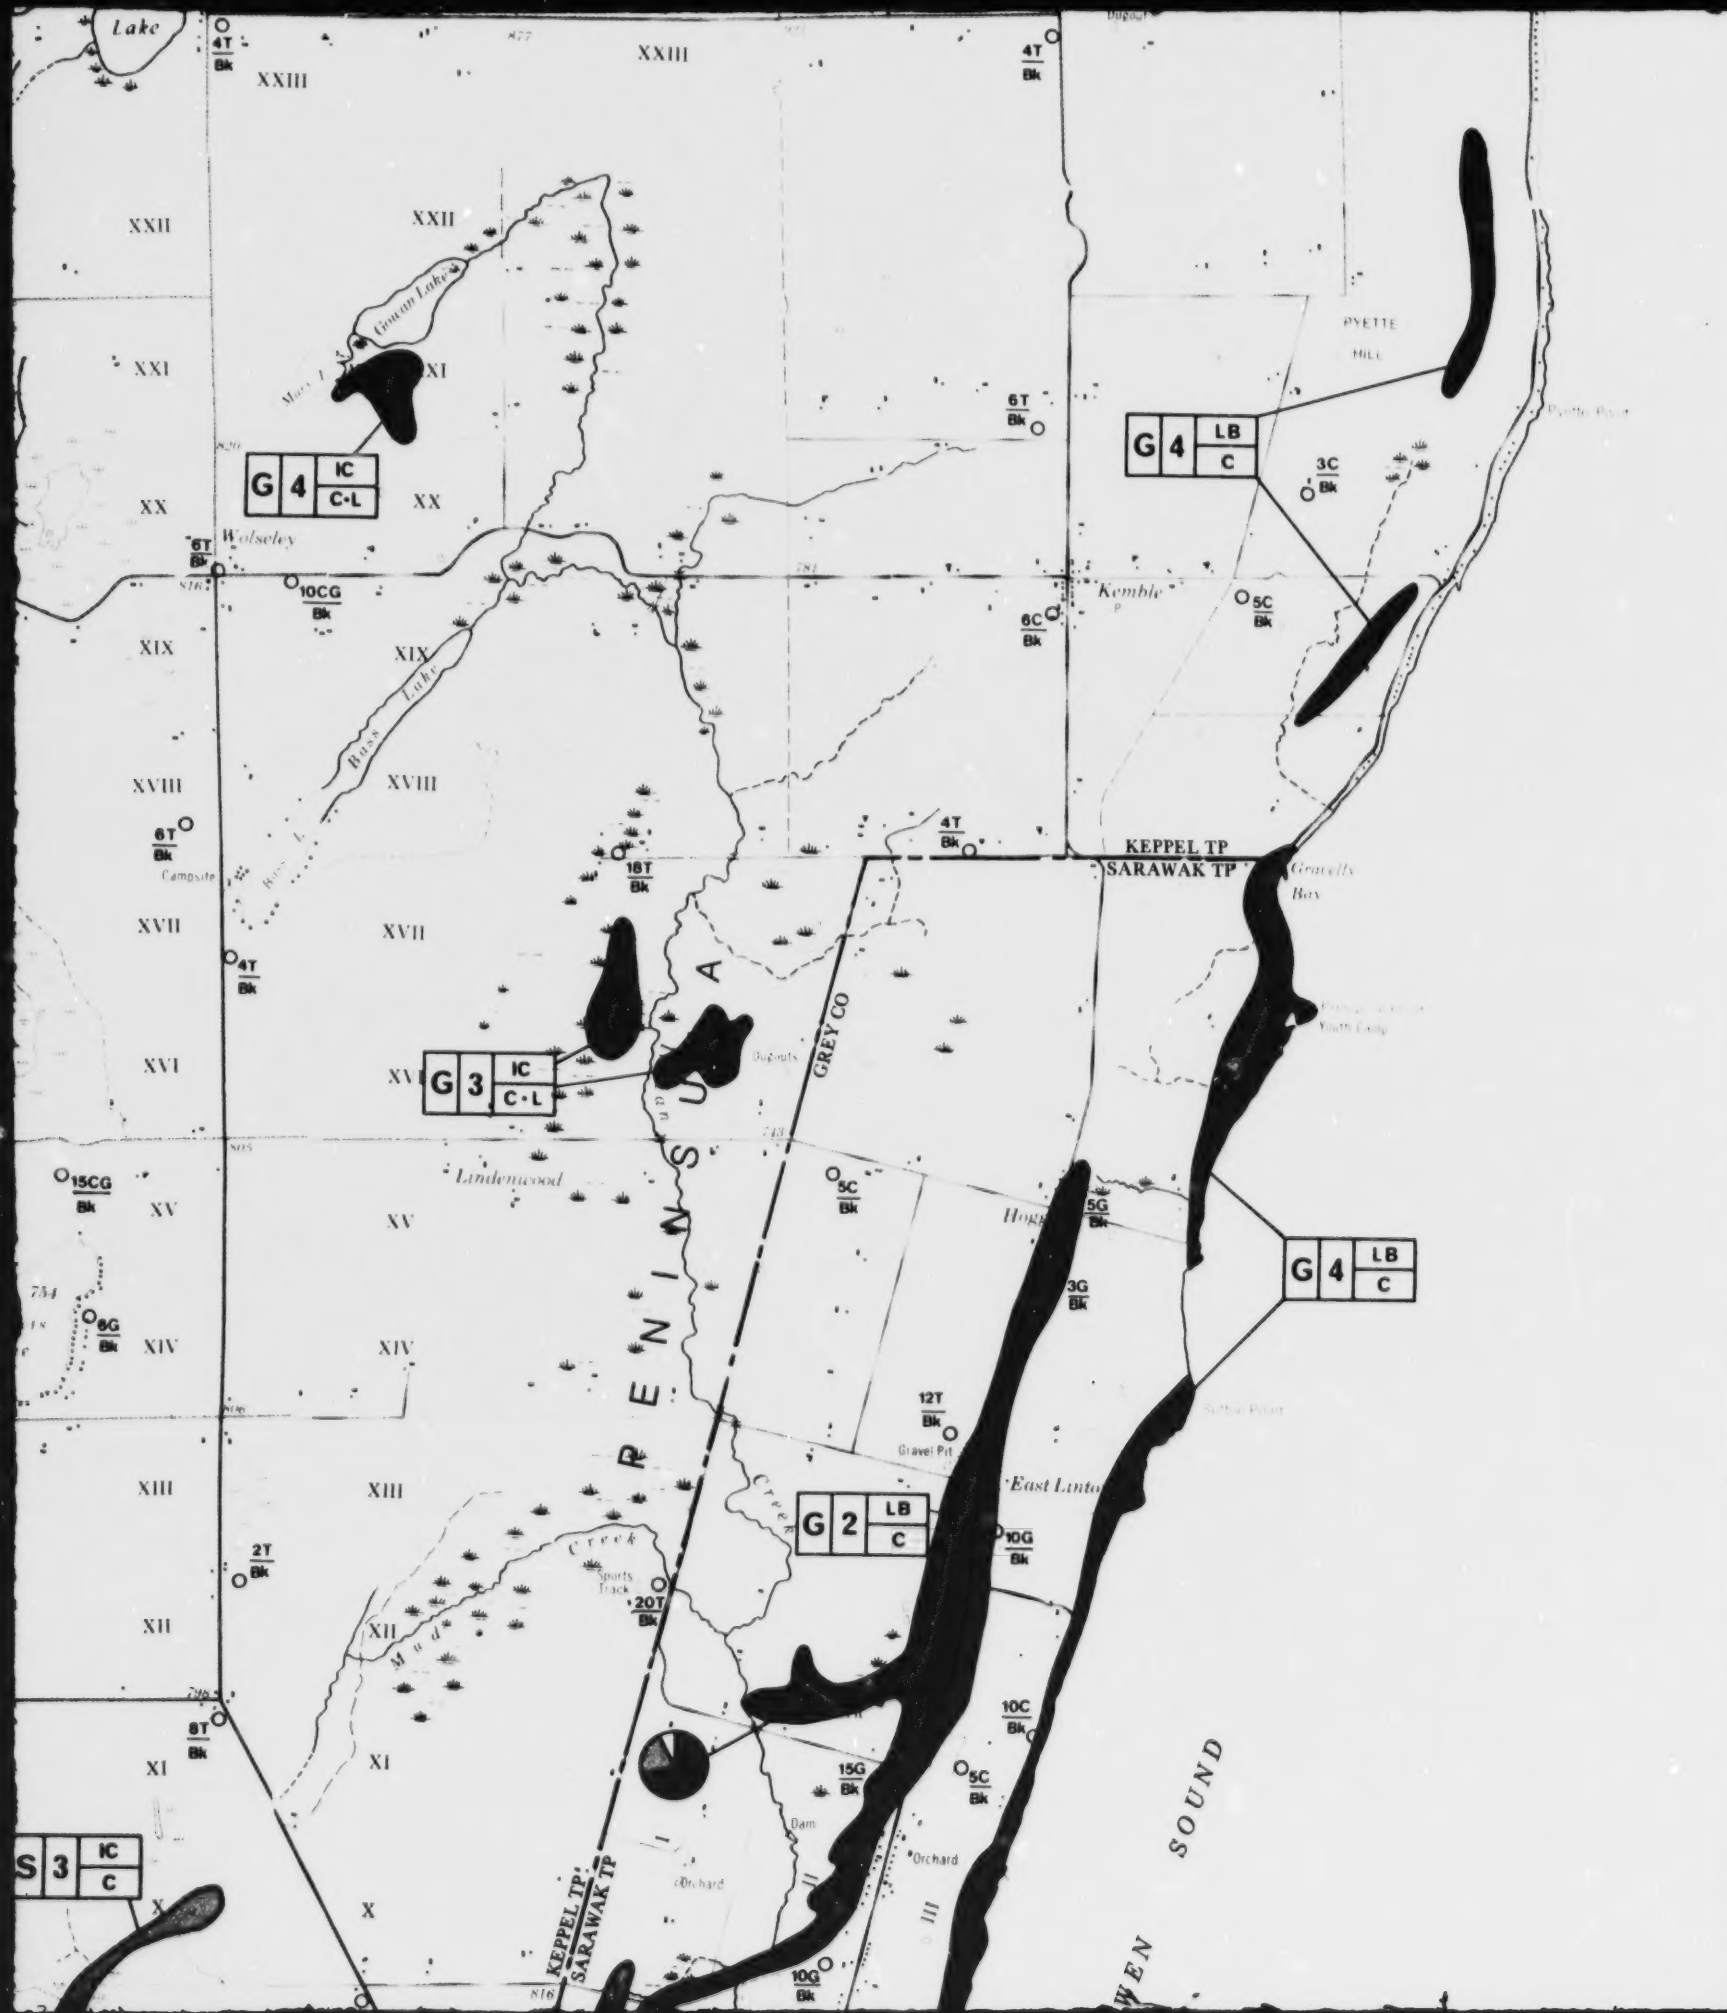


Location Map

Scale: 1:800,000


LEGEND

(Some map units and symbols may not apply to this map.)

MAP UNITS

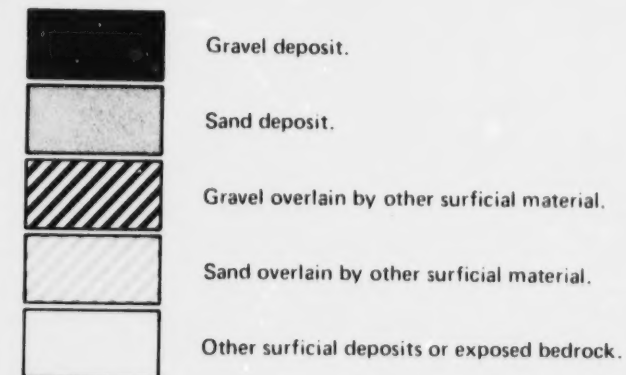

SYMBOLS

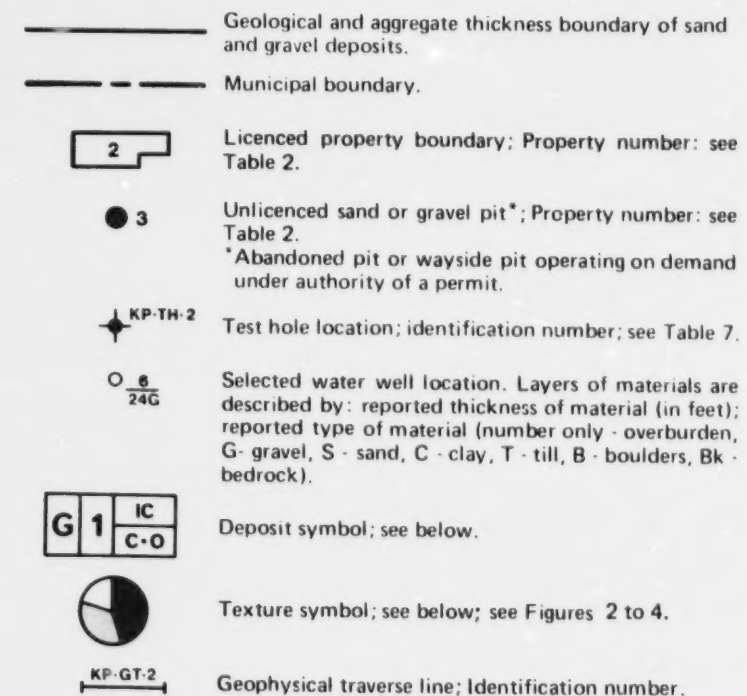

TEXTURE SYMBOL





The Texture Symbol provides quantitative assessment of the grain size distribution at a sampled location. The relative amounts of gravel, sand, silt and clay in the sampled material are shown graphically by the subdivision of a circle into proportional segments. The above example shows a hypothetical sample consisting of 45% gravel, 35% sand and 20% silt and clay.

DEPOSIT SYMBOL



Deposits are identified by Gravel Content, Thickness Class, Geological Type and Quality Indicator. Gravel Content is expressed as a percentage of gravel-sized material (i.e. material retained on the 4.75 mm sieve). Thickness Class is based on potential aggregate tonnage per acre. Geological Type refers to

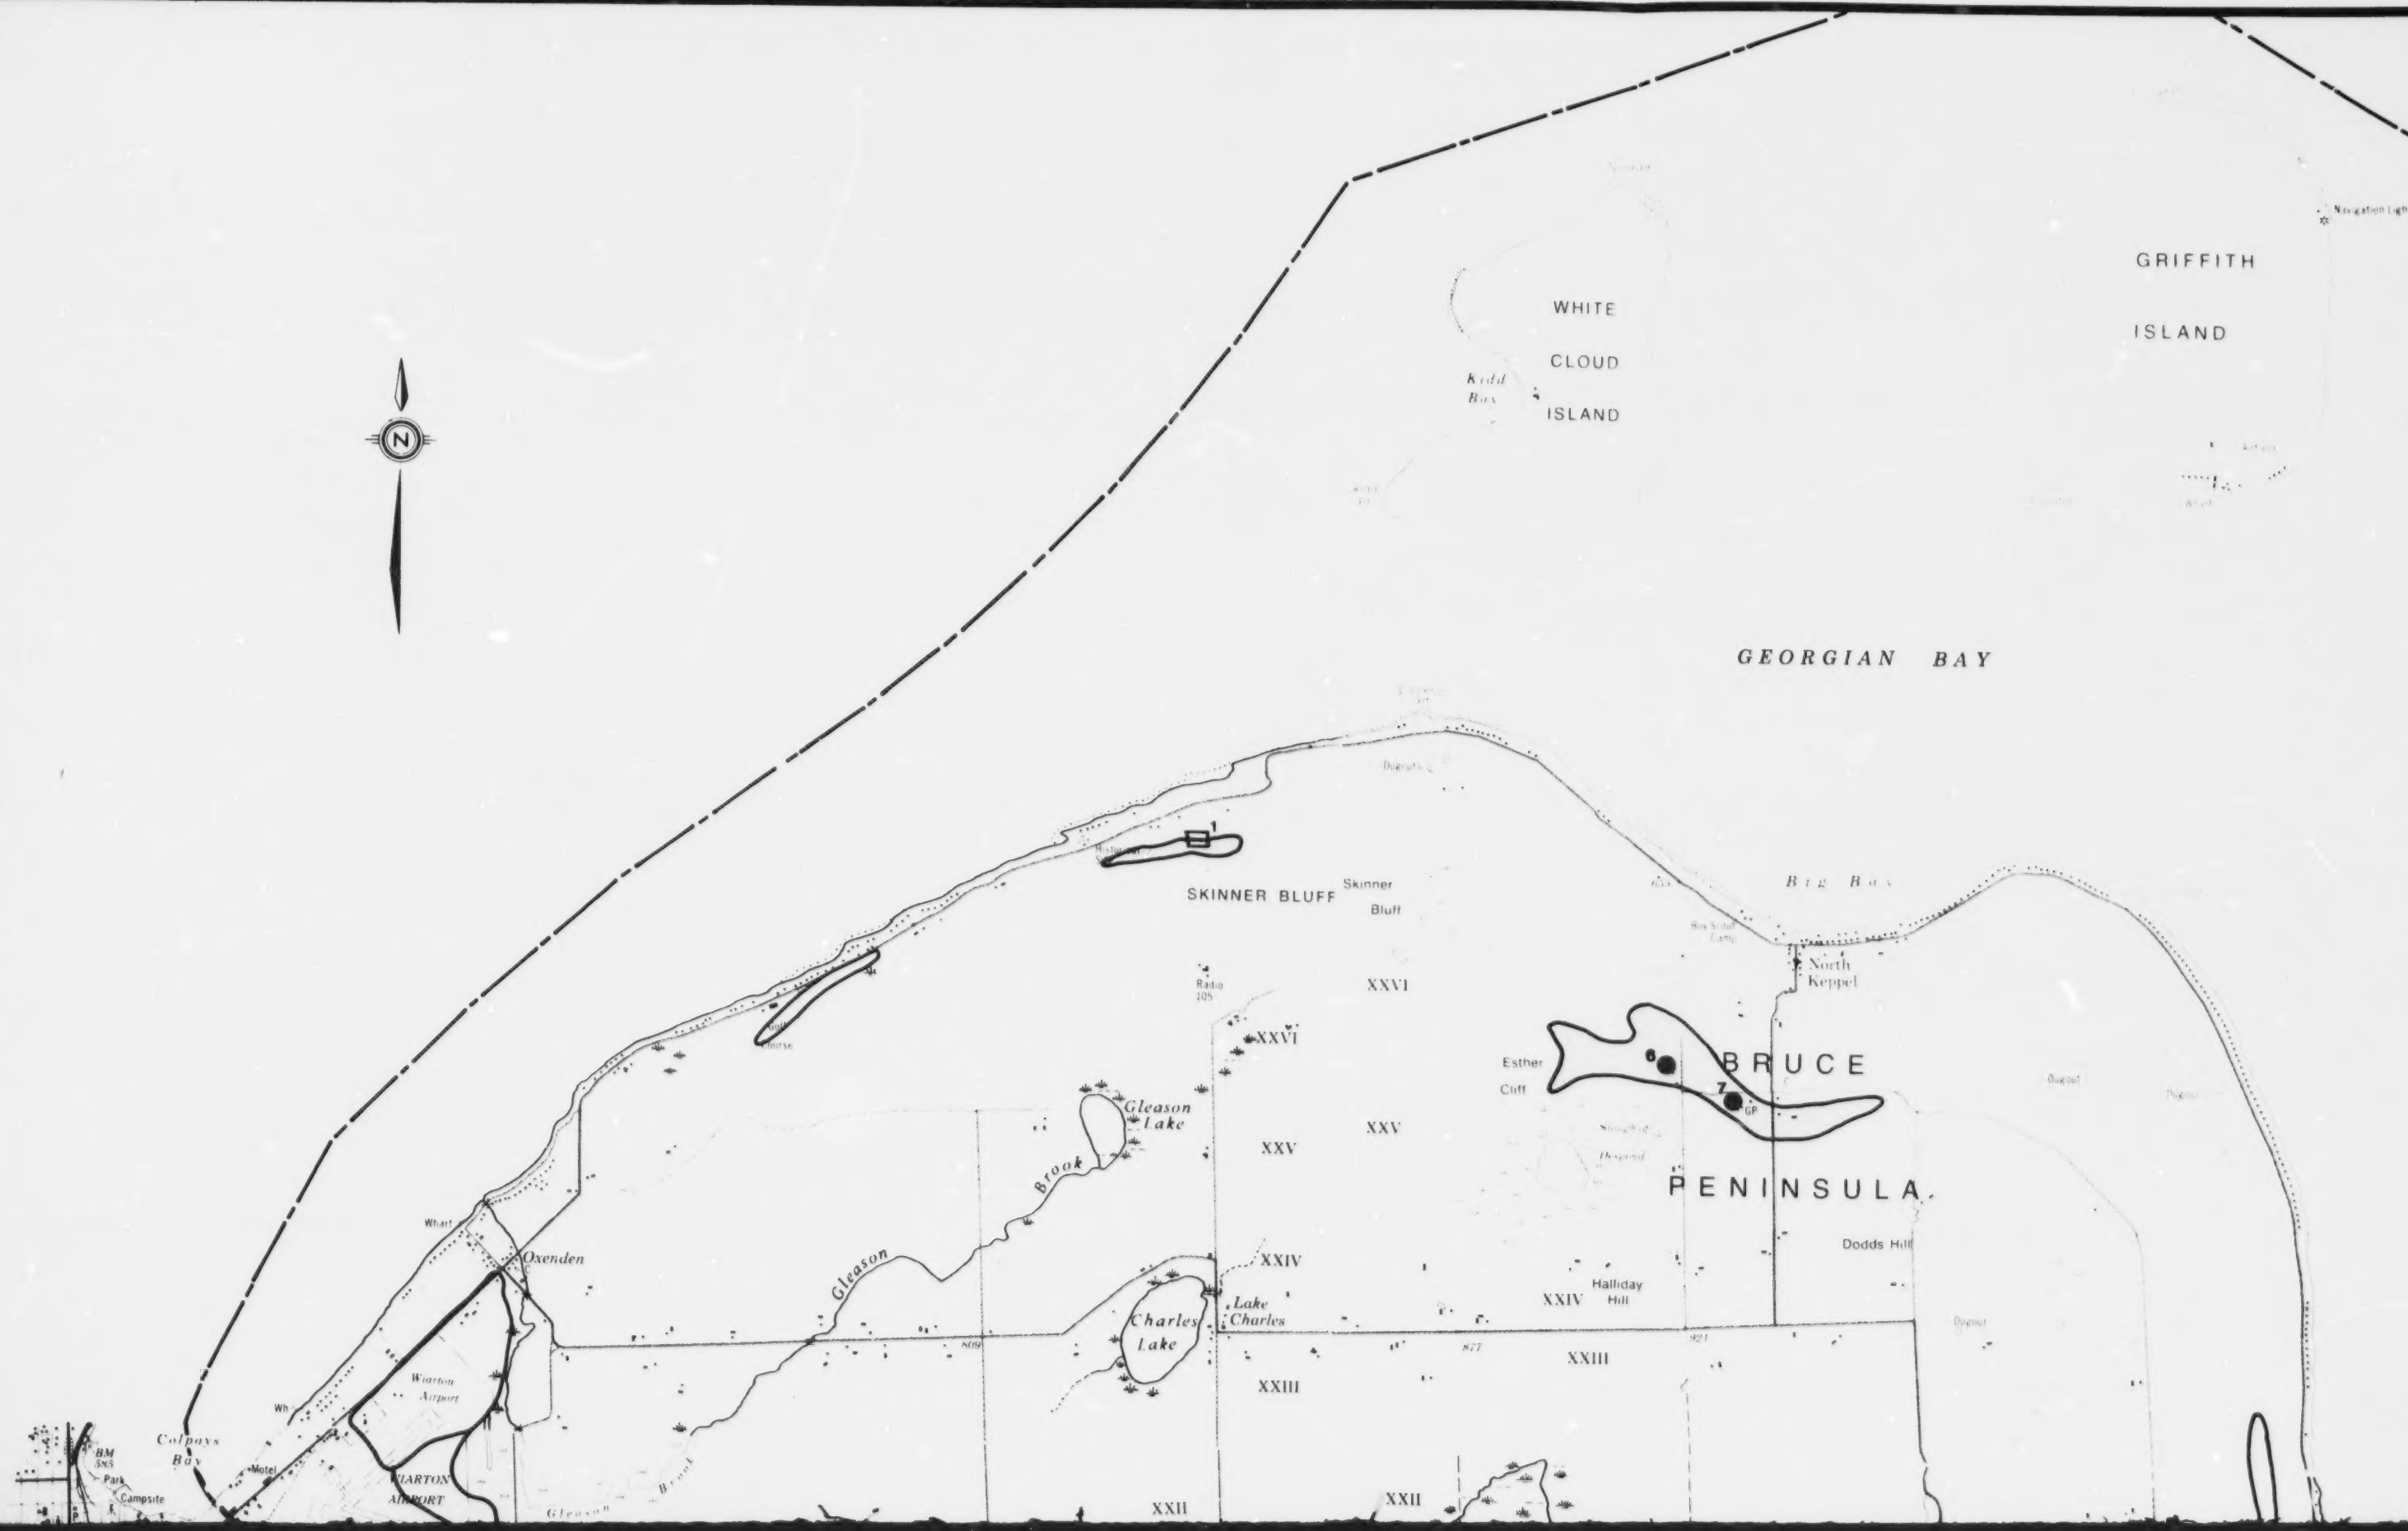

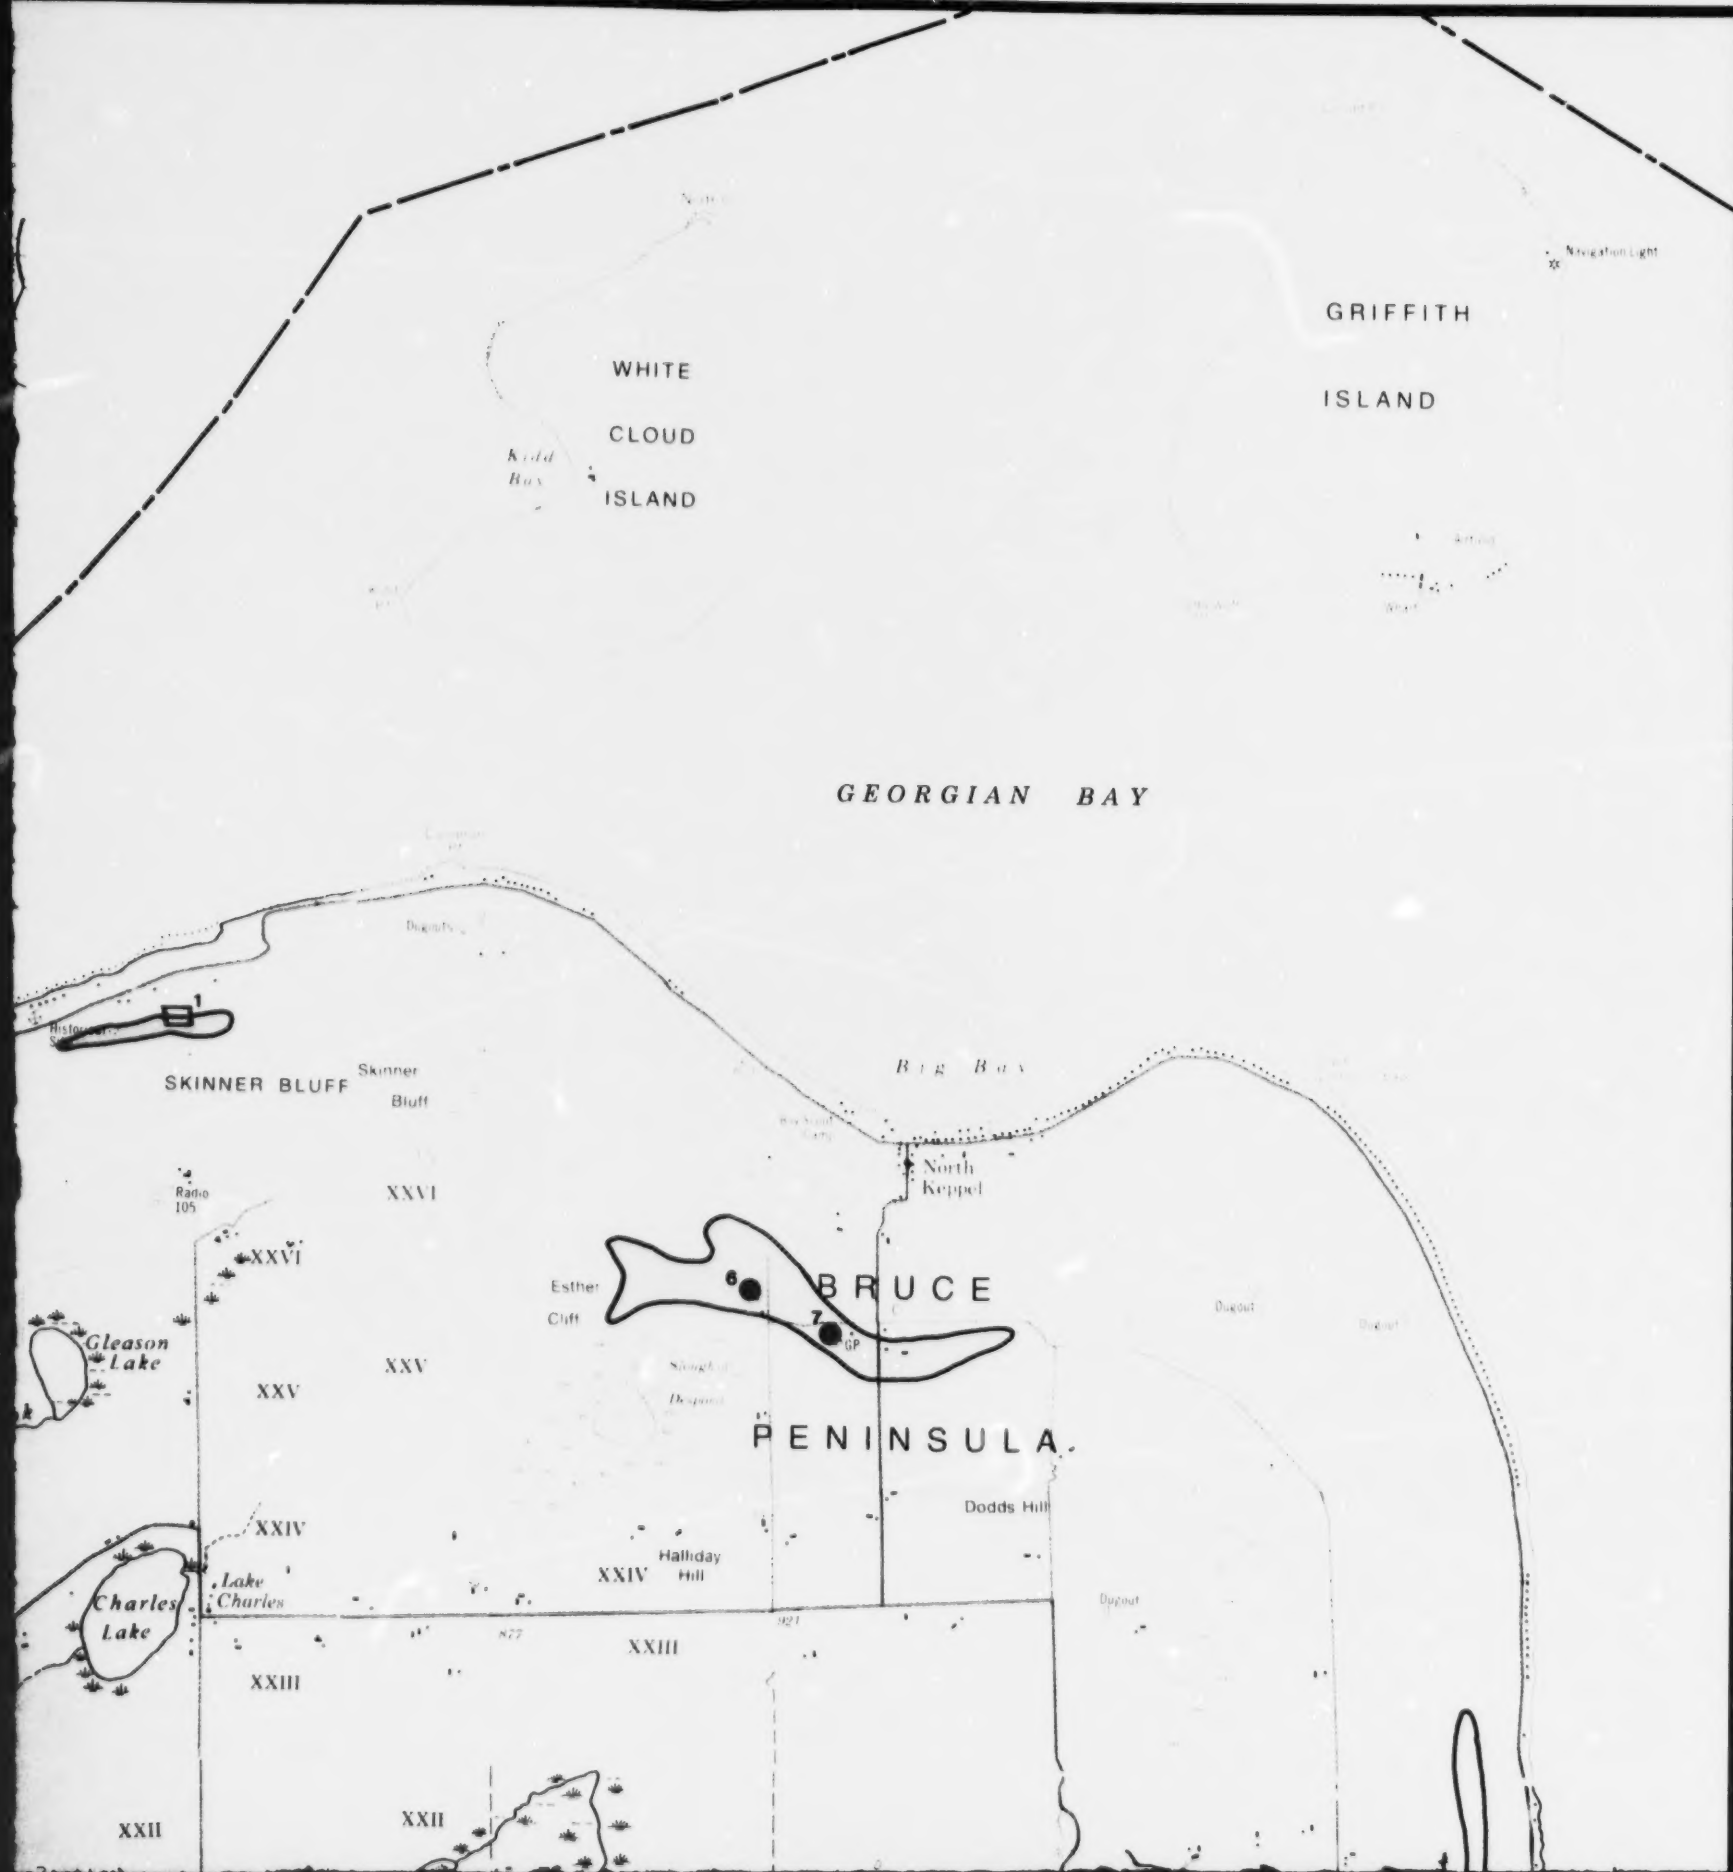


Ministry of
Natural
Resources

Hon. Michael Harris
Minister
Mary Mogford
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY


KEPPEL and SARAWAK TOWNSHIPS
GREY COUNTY

MAP 2
SELECTED SAND AND GRAVEL
RESOURCE AREAS



NTS Reference: 41 A/10, 41 A/11
41 A/14, 41 A/15

© OMNR-OGS 1985

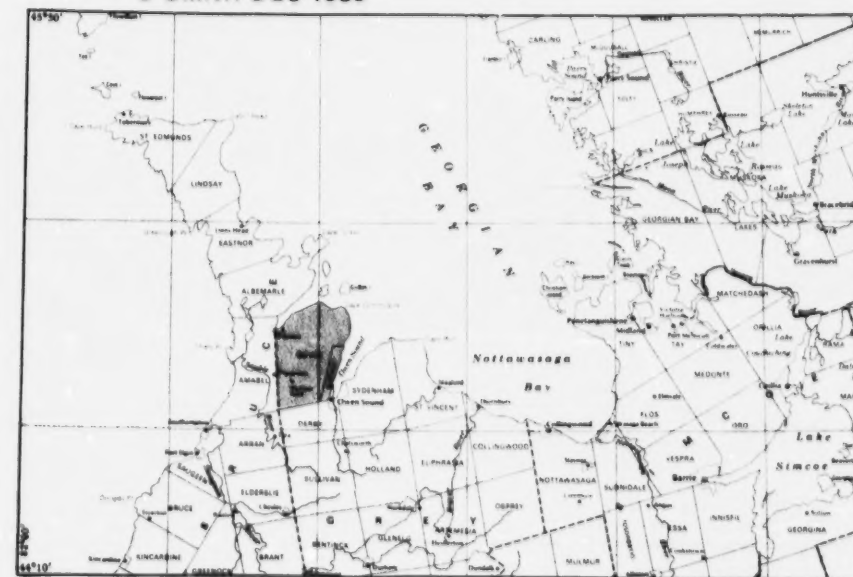

Location Map


Scale: 1:800,000

LEGEND

(Some map units and symbols may not apply to this map.)

MAP UNITS

Selected sand and gravel resource area, primary signifi-

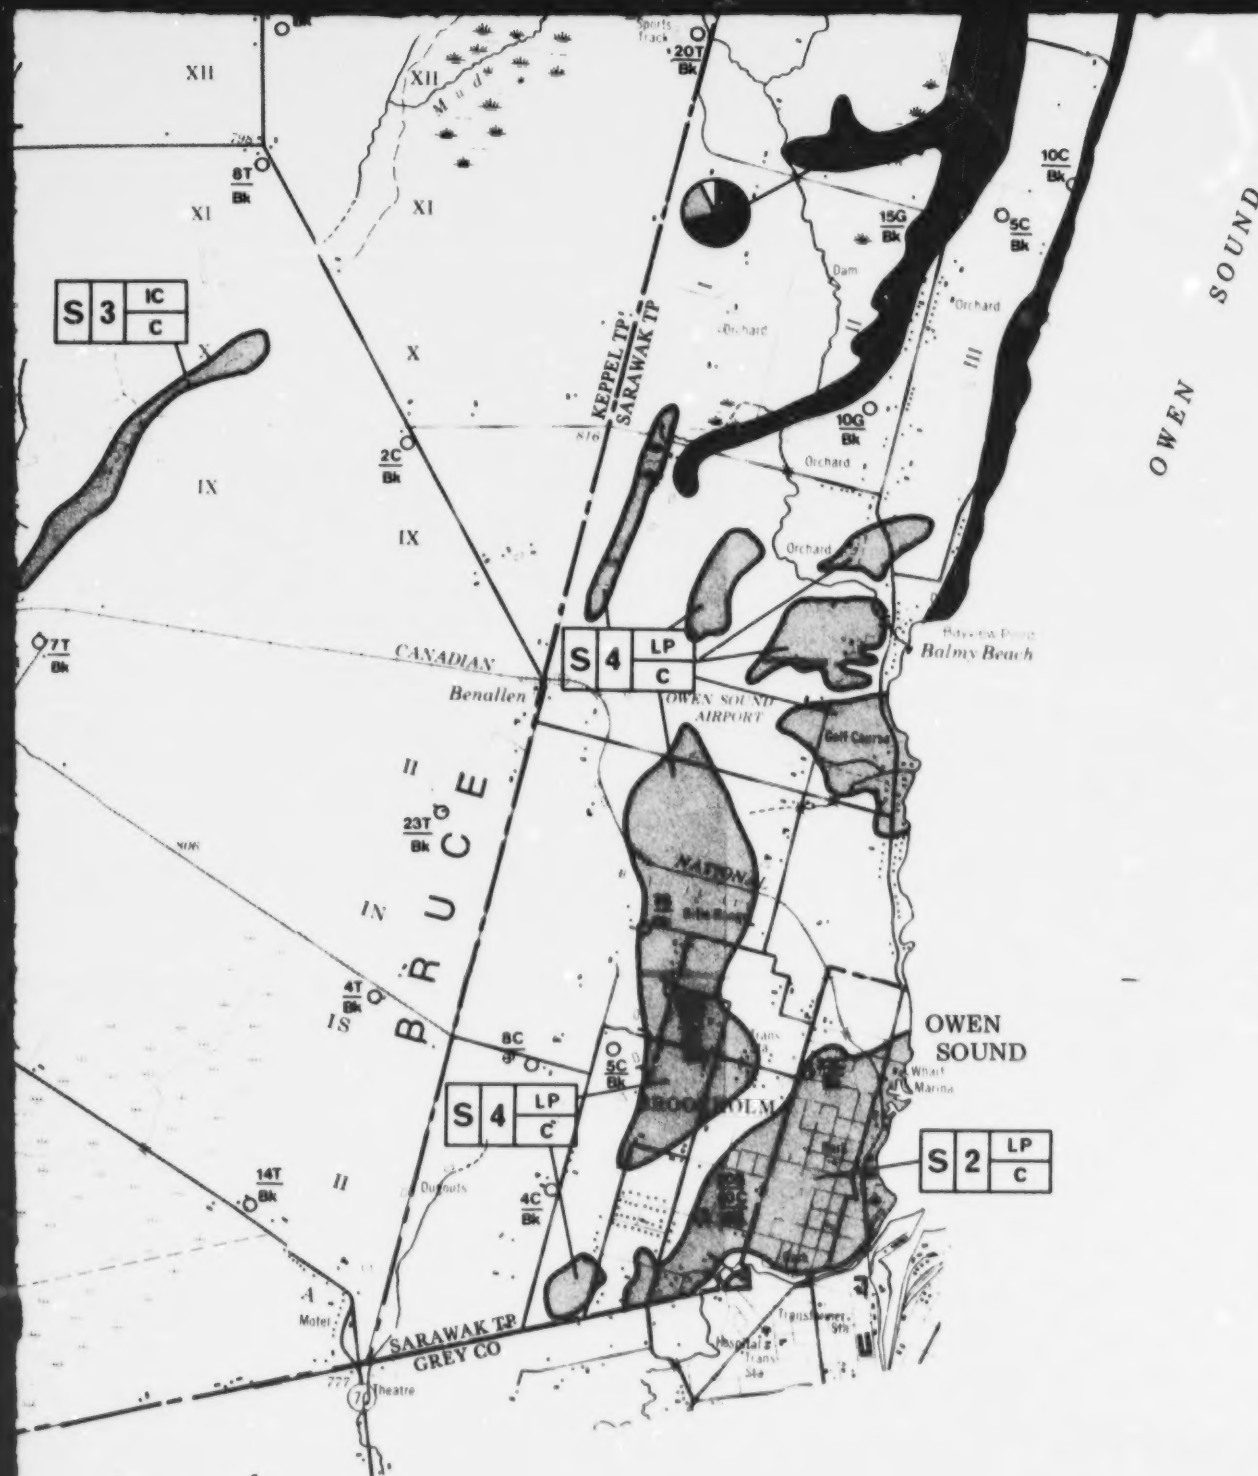

is based on potential aggregate tonnage per acre. Geological Type refers to

The Texture Symbol provides quantitative assessment of the grain size distribution at a sampled location. The relative amounts of gravel, sand, silt and clay in the sampled material are shown graphically by the subdivision of a circle into proportional segments. The above example shows a hypothetical sample consisting of 45% gravel, 35% sand and 20% silt and clay.

DEPOSIT SYMBOL



Deposits are identified by Gravel Content, Thickness Class, Geological Type and Quality Indicator. Gravel Content is expressed as a percentage of gravel-sized material (i.e. material retained on the 4.75 mm sieve). Thickness Class is based on potential aggregate tonnage per acre. Geological Type refers to geologic origin. Quality Indicator describes objectionable grain size and lithology.

Gravel Content

- G** Greater than 35% gravel.
S Less than 35% gravel.

Thickness Class

Class	Average Thickness in Feet (Metres)	Tons per Acre	Tonnes per Hectare
1	greater than 20 (>6)	greater than 50,000	greater than 112 000
2	10 - 20 (3 - 6)	25,000 - 50,000	56 000 - 112 000
3	5 - 10 (1.5 - 3)	12,500 - 25,000	28 000 - 56 000
4	less than 5 (<1.5)	less than 12,500	less than 28 000


Geological Type



AL	Older Alluvium	K	Kame
E	Esker	LB	Lacustrine Beach
EM	End Moraine	LD	Lacustrine Delta
IC	Undifferentiated Ice-Contact Stratified Drift	LP	Lacustrine Plain
ICT	Ice-Contact Terrace	OW	Outwash
		WD	Windblown Forms

(see Appendix C for descriptions of Geological Types)

Quality Indicator

- If blank, no known limitations present.
- C** Clay and/or silt (fines) present in objectionable quantities.
- L** Deleterious lithologies present.
- O** Oversize particles or fragments present in objectionable quantities.

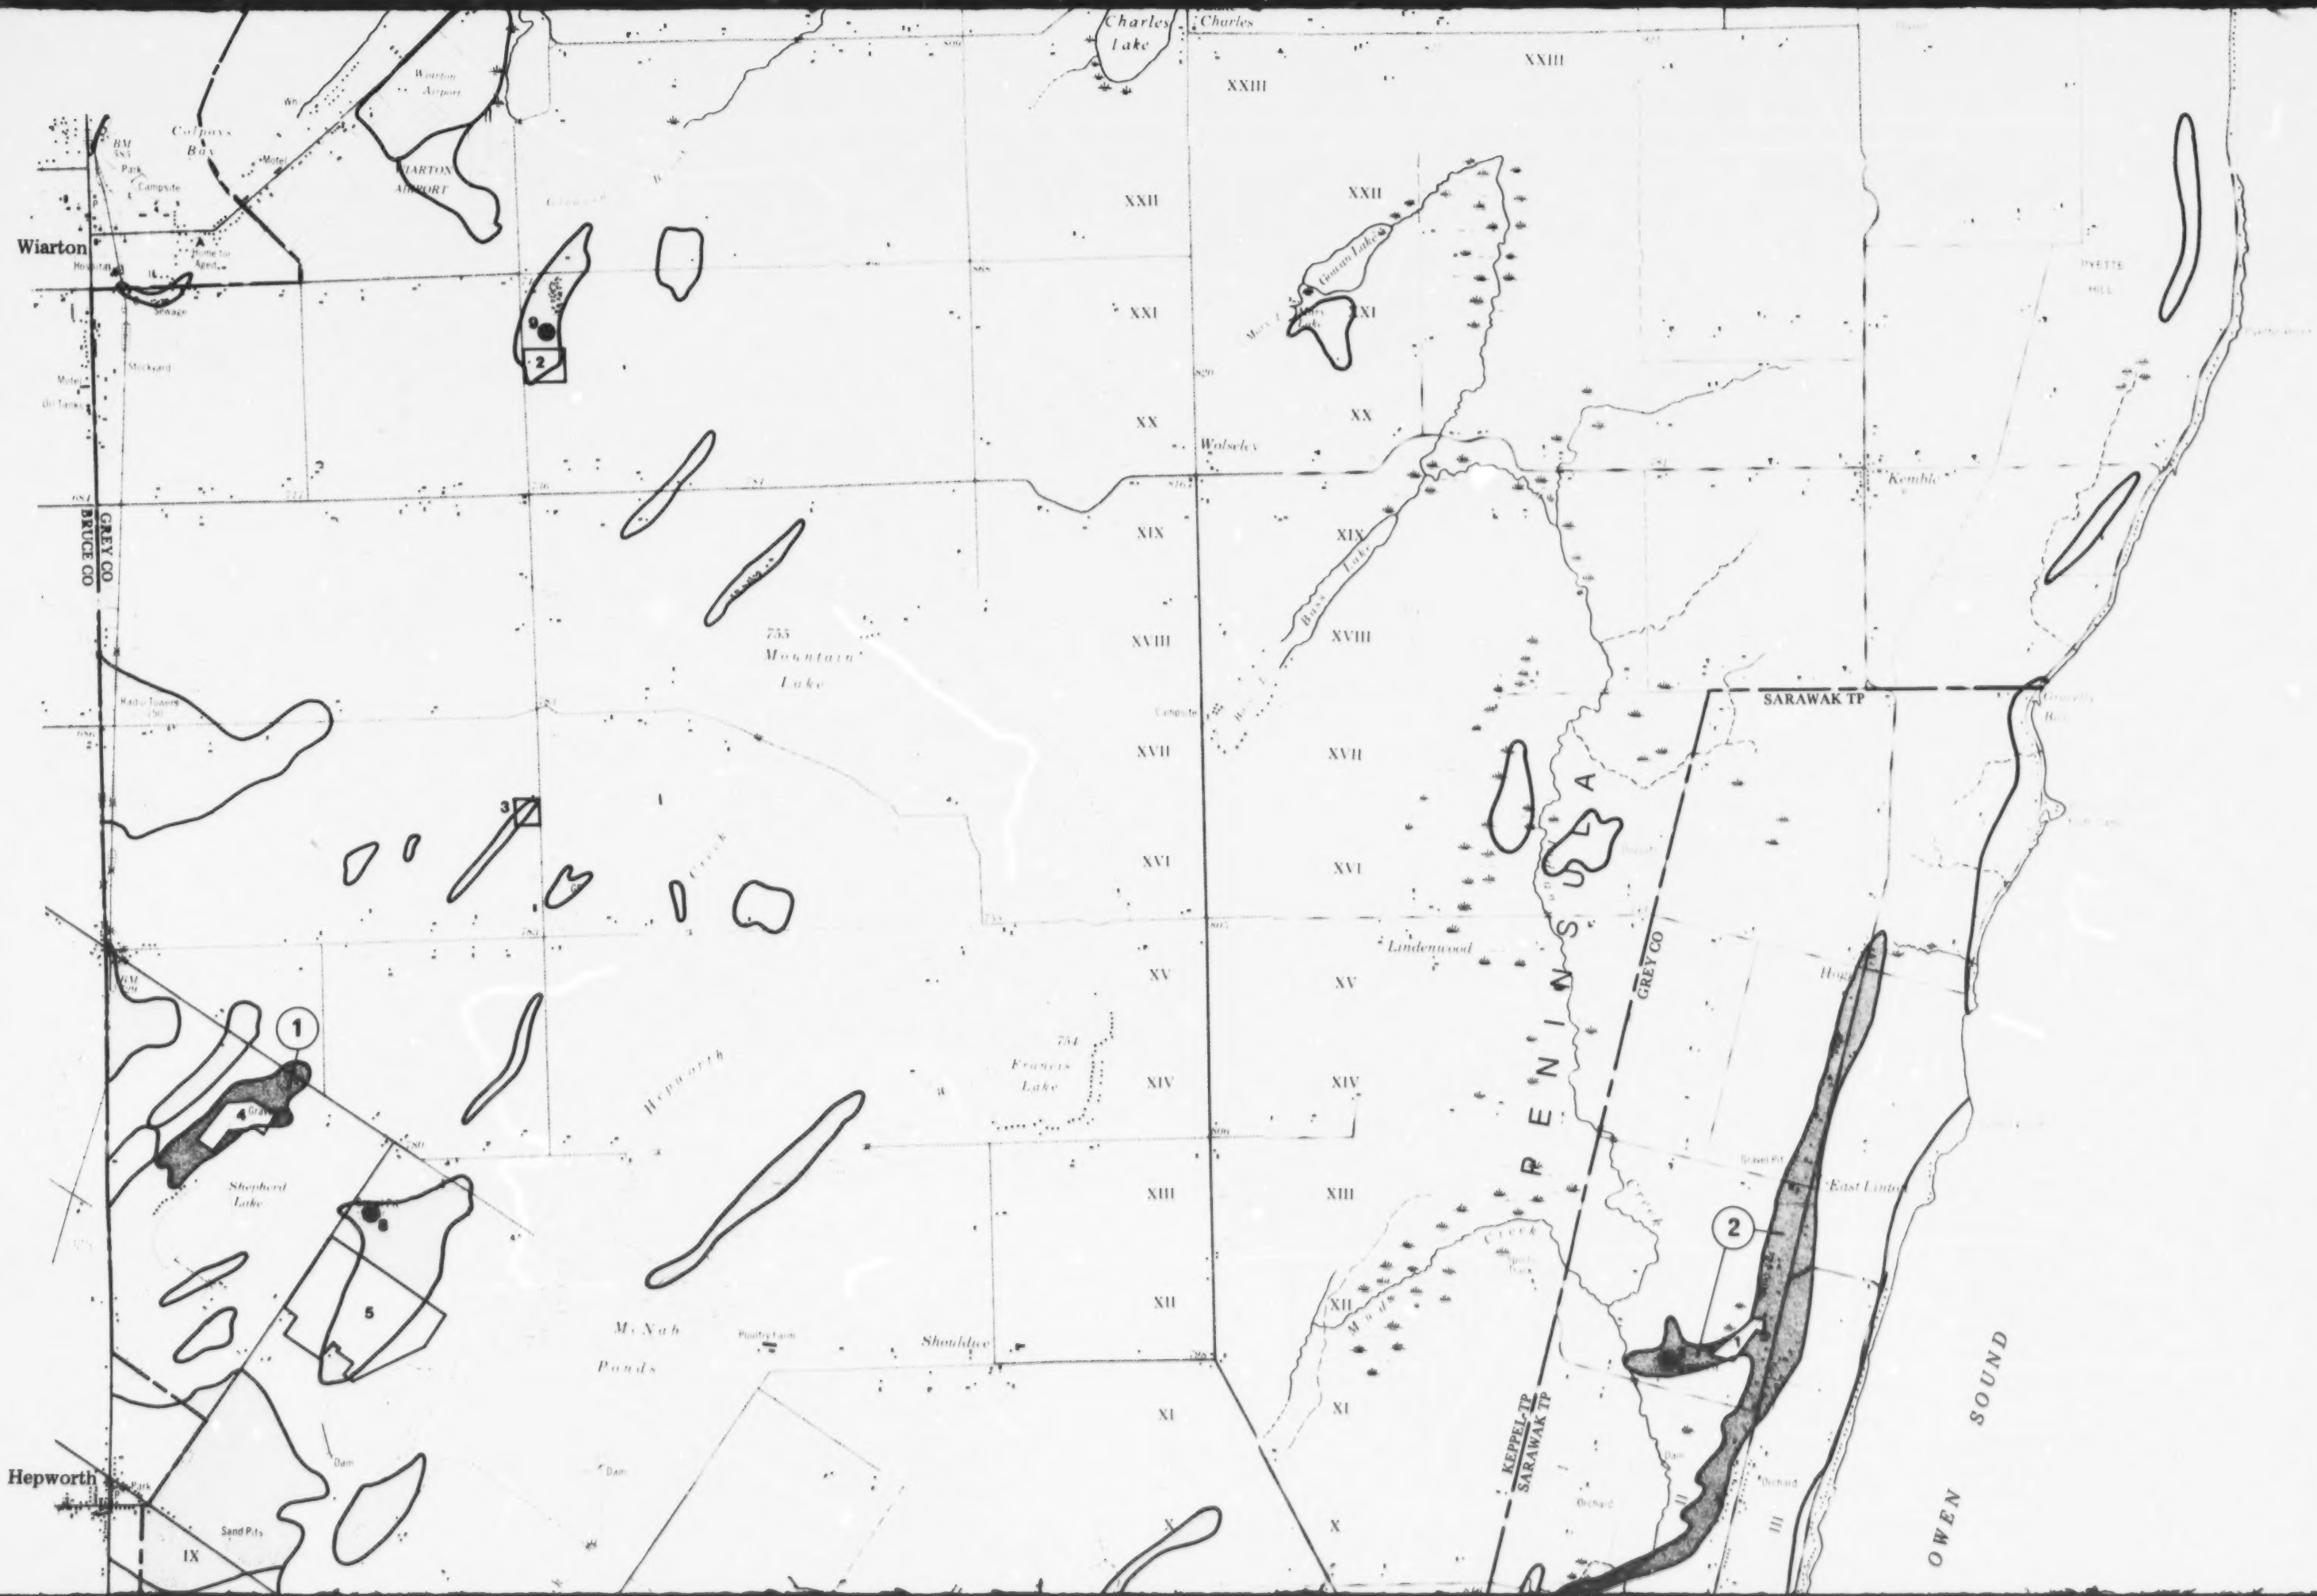

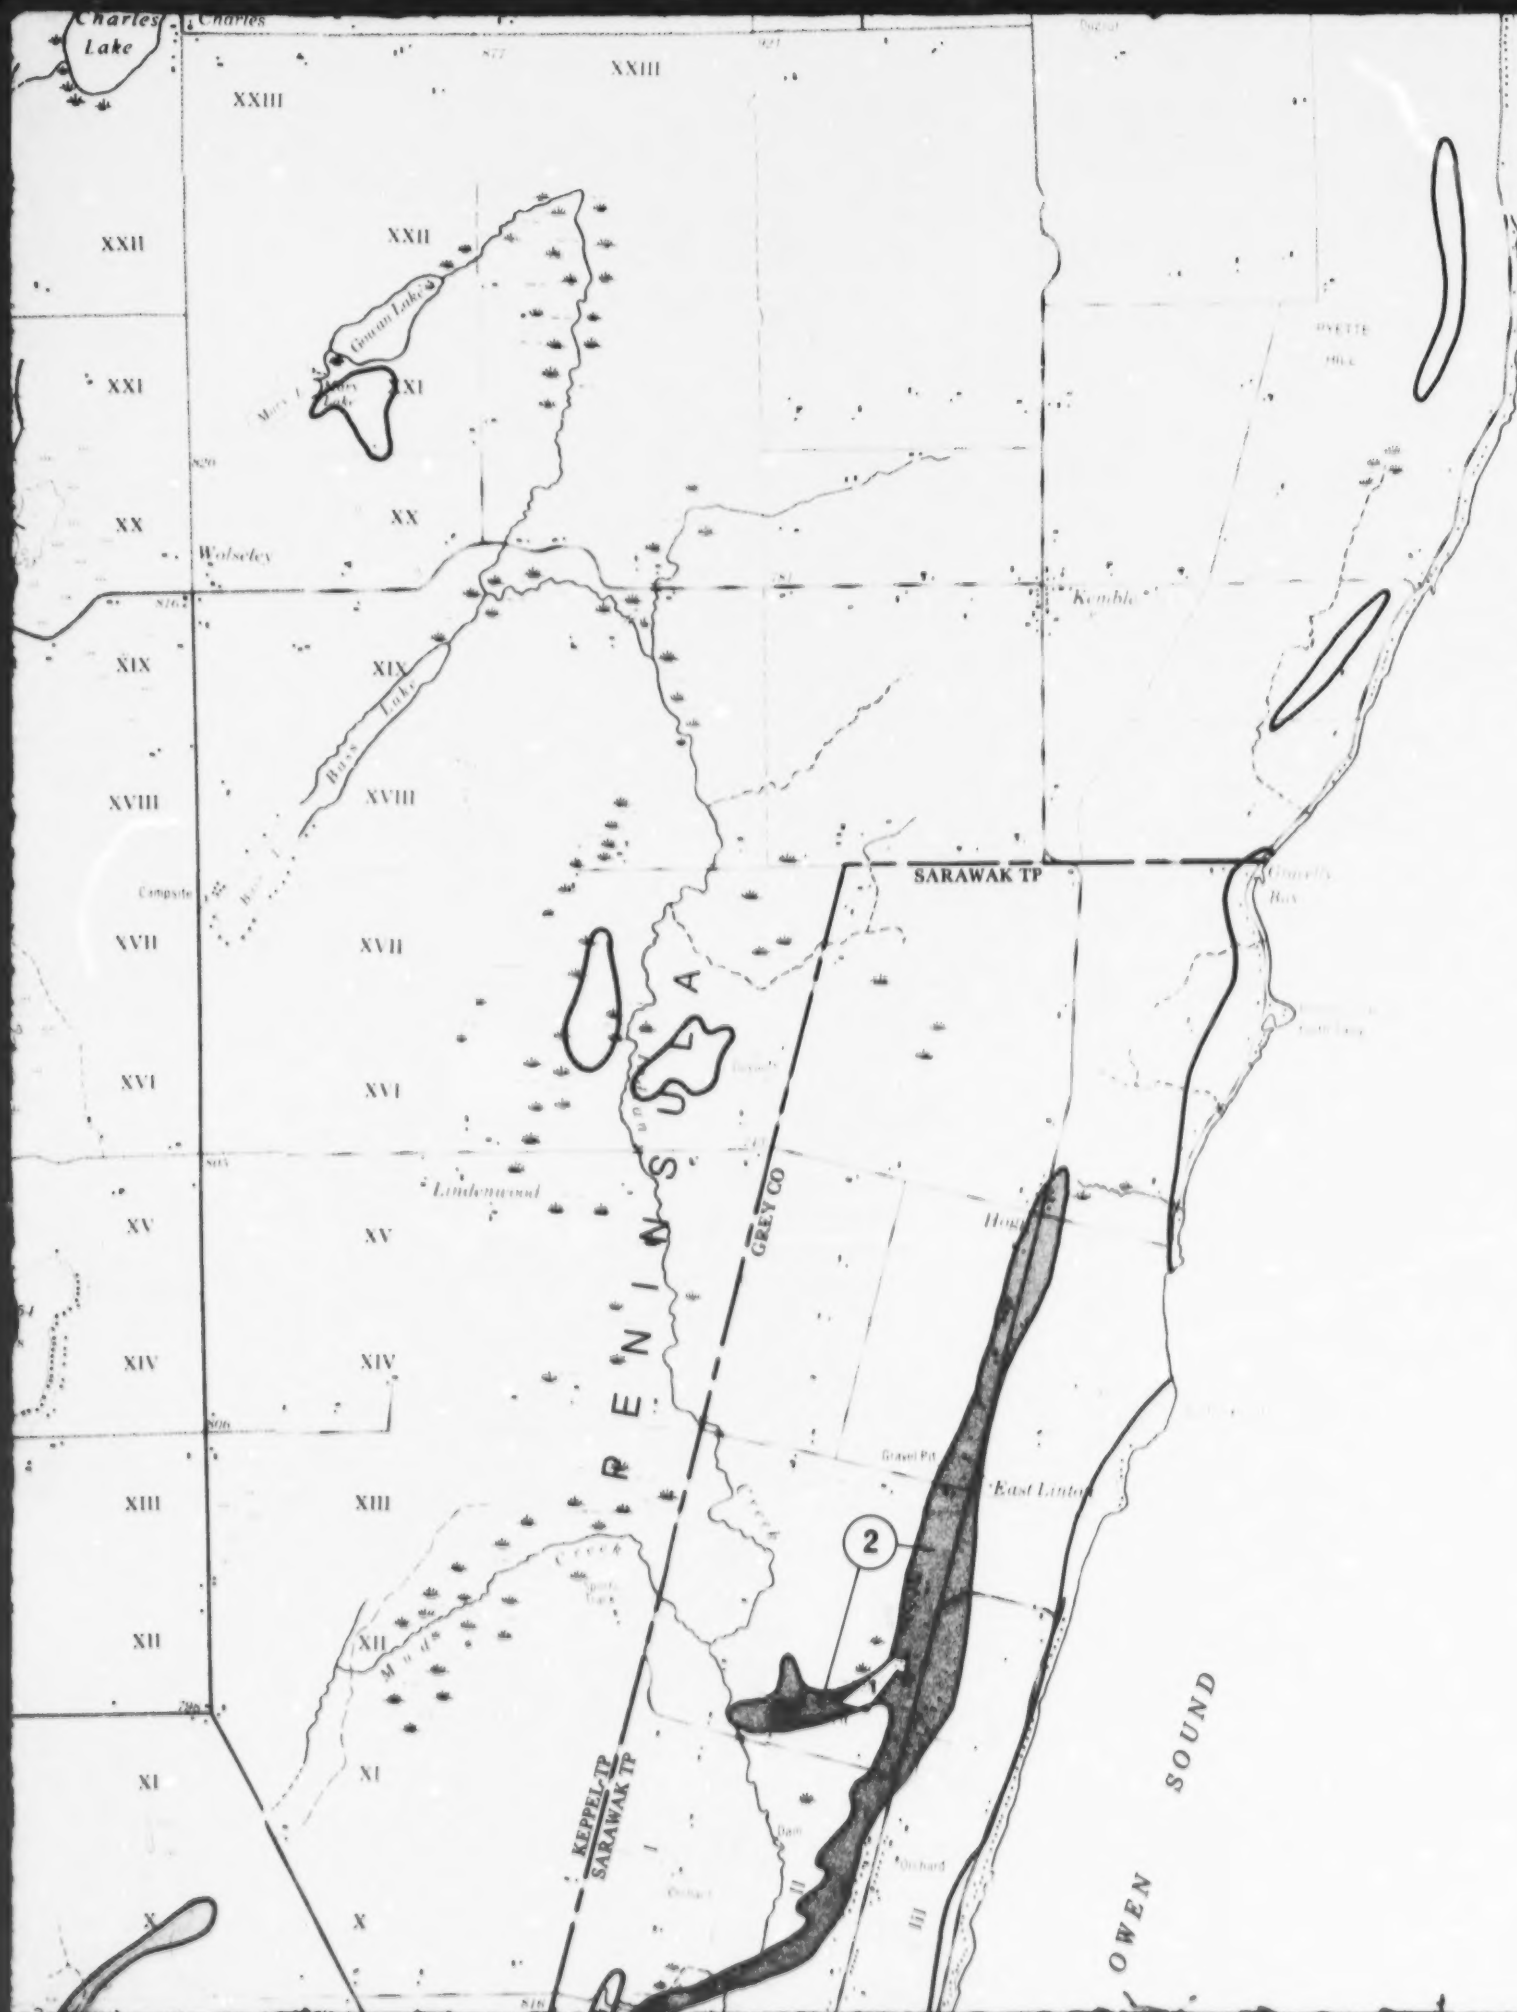

Location Map

Scale: 1:800,000

LEGEND

(Some map units and symbols may not apply to this map.)

MAP UNITS



Selected sand and gravel resource area, primary significance; deposit number; see Table 3.



Selected sand and gravel resource area, secondary significance.




Selected sand and gravel resource area, tertiary significance.

SYMBOLS



Geological and aggregate thickness boundary of sand and gravel deposits.



Municipal boundary



Licensed property boundary; Property number: see Table 2.



Unlicensed sand or gravel pit*; Property number: see Table 2.

*Abandoned pit or wayside pit operating on demand under authority of a permit.

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.

Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.

Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.

Geology by: B. H. Feenstra, in prep.

D. R. Sharpe and G. R. Jamieson, 1982.

D. R. Sharpe, 1982a, b.

Additional Field Work by: Staff of the Aggregate Assessment Office.

Compilation and Drafting by: Staff of the Aggregate Assessment Office.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 119.

This map is published with the permission of V. G. Milne, Director, Ontario Geological Survey.

Issued 1985.





KEPPEL
SARAWAK



WHITE
CLOUD
ISLAND



GRIFFITH
ISLAND

GEORGIAN BAY

QUEENSTON FORMATION

Big Bay


North
Kepp

PENINSULA

Charles
Lake

Colpoys
Bay

Wiar-ton

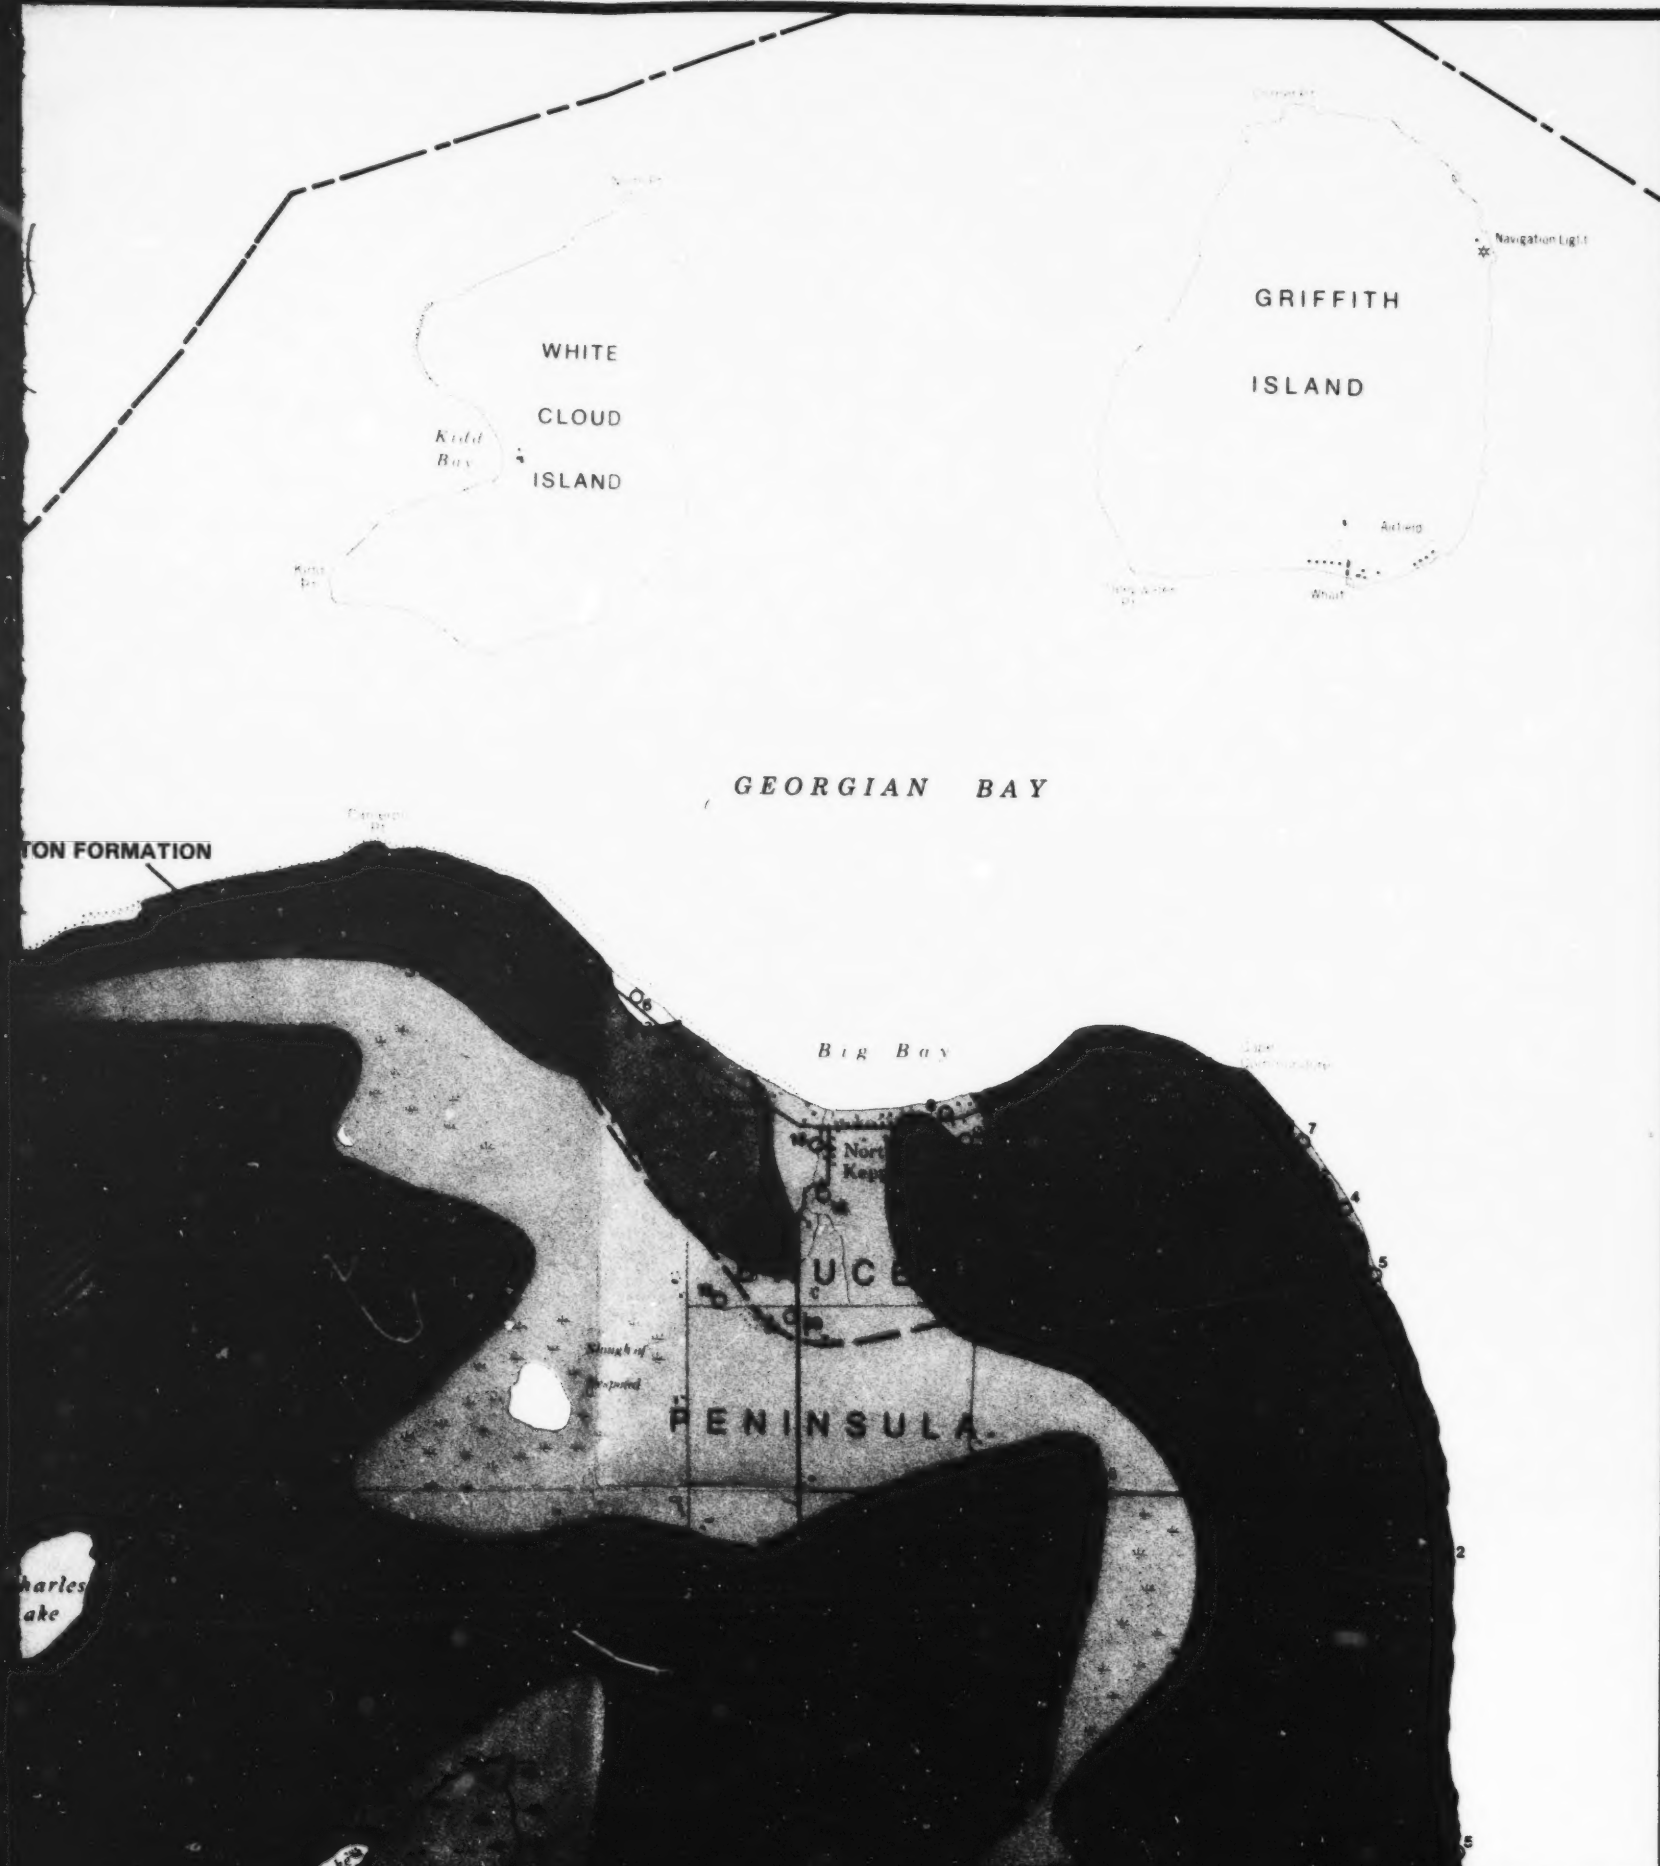

Ontario

Ministry of
Natural
Resources

Hon. Michael Harris
Minister


Mary Mogford
Deputy Minister

ONTARIO GEOLOGICAL SURVEY
AGGREGATE RESOURCES INVENTORY

KEPPEL and SARAWAK TOWNSHIPS
GREY COUNTY


MAP 3
BEDROCK RESOURCES

Scale 1: 50 000



NTS Reference: 41 A/10, 41 A/11
41 A/14, 41 A/15

© OMNR-OGS 1985

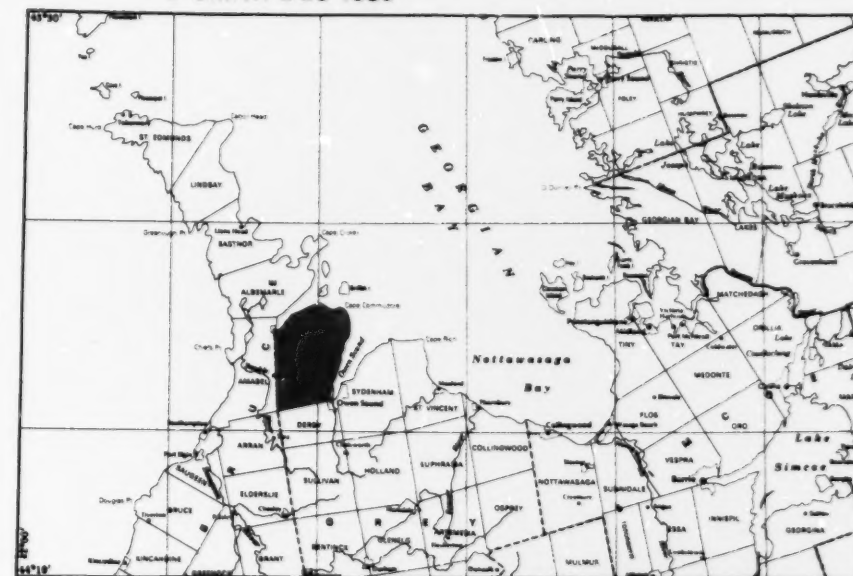

Location Map

Scale: 1:800,000

LEGEND

(Some units and symbols may not apply to this map.)

BEDROCK UNITS

PALEOZOIC

SILURIAN

MIDDLE SILURIAN

Guelph Formation

Dolostone

Amabel Formation & Fossil Hill Formation

Warton

2b

BRUCE CO

AMABEL TP

Hepworth

AMABEL & FORMIL HILL FORMATIONS

755
Mountain
Lake

QUELUP FORMATION

754
Francis
Lake

McNab
Ponds

AMABEL & FORMIL HILL FORMATIONS

Lake

XXI

XIX

2d

CABOTHEAD &
MANITOULIN
FORMATIONS

GEORGIAN BAY
FORMATION

QUEENSTON
FORMATION

SOUND

EN



LEGEND

(Some units and symbols may not apply to this map.)

BEDROCK UNITS

PALEOZOIC

SILURIAN

MIDDLE SILURIAN

Guelph Formation

Dolostone

Amabel Formation & Fossil Hill Formation

Dolostone

LOWER SILURIAN

Cabot Head Formation & Manitoulin Formation

Shale

Dolostone

ORDOVICIAN

UPPER ORDOVICIAN

Queenston Formation

Red shale

Georgian Bay Formation

Grey shale and limestone interbeds


DRIFT THICKNESS




Bedrock outcrop (see Table 4); areas of exposed bedrock partially covered by a thin veneer of drift. Drift thickness is generally less than 3 feet (1 m).



Bedrock covered by drift (see Table 4); drift thickness is generally 3 to 25 feet (1 to 8 m). Bedrock outcrops may occur.



Bedrock covered by drift (see Table 4); drift thickness is generally 25 to 50 feet (8 to 15 m). Isolated bedrock outcrops may occur.



Bedrock covered by drift; drift thickness is generally greater than 50 feet (15 m).

SYMBOLS



Selected bedrock resource area; deposit number; see Table 6.




Geological formation boundary.



Geological formation member boundary.




Formation thickness boundary (see text).




Drift thickness contour. (3-foot, 25-foot and 50-foot contours are shown).



Municipal boundary.




Licensed quarry boundary; Property number: see Table 5.



Unlicensed quarry*; Property number: see Table 5.
*Abandoned quarry or wayside quarry operating on demand under authority of a permit.



Isolated bedrock outcrop.



Selected water well location; reported depth to bedrock (in feet).

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.

Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.

Hepworth

McNab

Ponds

MANUEL & TOWN HILL FORMATIONS

VIII

V

IV

III

SHALLOO FORMATION

GREY CO

Alvanley

DERBY TP

Gravel Pit

CABOT HEAD & MANITOULIN FORMATIONS

OWEN SOUND AIRPORT

NATIONAL

BROOKHOLM

OWEN SOUND

OWEN SOUND

OWEN SOUND

2g

2g

2a

2h

21

21

KEPPEL
SARAWAK



KEPPEL
SARAWAK

- Q3 Unlicensed quarry*; Property number: see Table 5.
 *Abandoned quarry or wayside quarry operating on demand under authority of a permit.
- x Isolated bedrock outcrop.
- 24 Selected water well location; reported depth to bedrock (in feet).

SOURCES OF INFORMATION

Base map by Surveys and Mapping Branch, Ontario Ministry of Natural Resources.

Licence data from District and Regional Offices, Ontario Ministry of Natural Resources.

Aggregate suitability data from the Engineering Materials Office, Ontario Ministry of Transportation and Communications.

Selected water well data from the Ontario Ministry of the Environment.

Drilling data from the Petroleum Resources Section, Ontario Ministry of Natural Resources.

Geology by: B. A. Liberty, 1966.

B. A. Liberty and T. E. Bolton, 1971.

D. R. Sharpe, 1982a, b.

Additional Field Work by: Staff of the Aggregate Assessment Office.

Compilation and Drafting by: Staff of the Aggregate Assessment Office.

This map is to accompany O.G.S. Aggregate Resources Inventory Paper 119.

This map is published with the permission of V. G. Milne, Director, Ontario Geological Survey.

Issued 1985.